




IDEAL FOUNTAINSTM

Shaping Of WaterTM

1-833-433-2569




LED-ELITE-RING-40-RDM/DMX



Fixture Dimensions	.7.125" Dia
Submersible Rating Input	6.5 feet
Voltage Cable/Length	24VDC
Power Usage Dimming	20 feet- 18/5
Capability Color	40 watts
LED Diode Quantity Beam	Yes
Angle	RGBW DiodesRDM-DMX (4000K White)
Lens Material Fixture	10 (4 watts each)
Construction Fixture seal	10,30,45 Degrees (fixed)
Application Location LED	Tempered Glass
Diode Lifespan Warranty	Type 316L stainless steel (light fixture & yoke) Silicone Underwater, Wet or Dry
	~ 50,000 hours
	1 year

Certifications/Standards UL Listed, cUL Listed, CSA, IP68

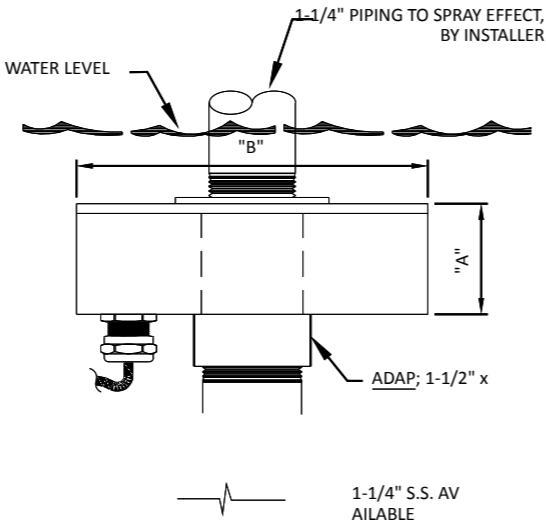

TECHNICAL DATA							
MODEL NO.	LIGHT SOURCE	LIGHT COLOR	BEAM ANGLE	INPUT VOLTAGE	WATTS	CABLE TYPE	IP RATING
LED-RING-40-RDM/DMX	10X4W RGBW DIODES	RGBW	10,30,45	24VDC	40	18-5 AWG SOW	68
LED-RING-40-BOARD	10X4W RGBW DIODES	RGBW		24VDC	40	N/A	

SPECIFICATION DATA: Small diameter, low profile LED submersible light fixture with center sleeve feature for nozzle riser mounting ★ (See important Adapter Note above!); high output LED diodes, stainless steel housing and fasteners, tempered glass lens, silicone lens gasket, chromed brass cord entrance fitting; 9 ft. of 18 AWG SOW cable (available with additional cord length).

DESIGN/APPLICATION DATA: Any fountain application where 360° illumination of a spray nozzle is required with a high output LED submersible light fixture.

NOTES: 1. 24VDC Power supply required to operate fixtures. Contact factory for requirements.
2. 'DMX' Controller required to operate 'RGBW' fixtures

LED-ELITE-FREESTANDING-32-RDM/DMX




Input voltage	12VAC or 24VDC (24VDC recommended)
Output power	32 watts (8X4W)
Rendering Index	>70rA (warm white)
Beam angle	20°, 45, 60, 90 – Bead lens 30, 60, 90
LEDs	Replaceable – Internal Driver
Material	Cast 316L Stainless Steel Silicone gasket – tempered glass lens
Face ring	316L SS Flush Mount
Color options	RGBW (3000k, 4000k, 6000k)
White	CREE-XPE – 2700K to 6500K
LEDs operating life	> 50,000 hours
IP rating	IP68 – Certified Submersible or Dry
Cable	9 FEET – SOW 18/5 longer lengths can be ordered
Dimensions	Diameter 5.9"x 2.5"

TECHNICAL DATA							
MODEL NO.	LIGHT SOURCE	LIGHT COLOR	BEAM ANGLE	INPUT VOLTAGE	WATTS	CABLE TYPE	IP RATING
LED-ELITE-FS-32-RDM/DMX	8X4W RGBW DIODES	RGBW	10,30,45	24VDC	32	18-5 AWG SOW	68
LED-ELITE-FS-BOARD	8X4W RGBW DIODES	RGBW		24VDC	32	N/A	

SPECIFICATION TION DATA: Freestanding LED light fixture; high output LED diodes, stainless steel housing and and fasteners, tempered glass lens,silicone gasket,chromed brass cord seal fitting; 9 ft. of 18 AWG SOW cable (available with additional cord length).

DESIGN/APPLICATION DATA: Any fountain application spot focus when illumination of a spray nozzle is required with a high output LED submersible light fixture.



LED-ELITE-FS-27-WHITE




Specification	Description
Input voltage	12VAC or 24VDC
Output power	27 watts (9X3W), optional 27 watts (See UL316-32RW)
Rendering Index	>70rA (warm white)
Beam angle	10°, 30, 45, 60, 90 Bead lens 15, 30, 60, 90
LEDs	Replaceable - Internal Driver
Material	Cast 316L Stainless Steel Silicone gasket - tempered glass lens
Face ring	316L SS Flush Mount
Color options	WHITE
White	CREE-XPE - 2700K to 6500K
LEDs operating life	> 50,000 hours
IP rating	IP68 - Certified Submersible or Dry
Cable	9 FEET - SOW 18/5 Longer cable can be ordered
Dimensions	Diameter 5.9"x 2.5"
Certifications	cULus - CSA22.2 no.89 - including swimming pools and splash pads - meets 680 standards
Installation	Submersible or Dry - optional tripod and/or custom height SS extension post

TECHNICAL DATA							
MODEL NO.	LIGHT SOURCE	LIGHT COLOR	BEAM ANGLE	INPUT VOLTAGE	WATTS	CABLE TYPE	IP RATING
LED-ELITE-FS-27-WHITE	9 X3W	WHITE	10,30,45	24VDC	27	18-5 AWG SOW	68

SPECIFICATION TION DATA: A: Freestanding LED light fixture; high output LED diodes, stainless steel housing and and fasteners, tempered glass lens,silicone gasket,chromed brass brass cord seal fitting; 9 ft. of 18 AWG SOW cable (available with additional cord length).

DESIGN/APPLICATION DATION DATA:A: Any fountain application spot focus when illumination of a spray nozzle is required with a high output LED submersible light fixture.
NOTES: 1. 24VDC Power supply required to operate fixtures. Contact factory for requirements.
2 'DMX' Controller required to operate 'RGBW' fixtures



Small Type Recessed LED Pool Light

HX69B-3
Symmetrical



Warning:
Must be installed underwater to prevent being damaged from over heating.



SPECIFICATIONS

- ◆ Front cover & Housing: hard chrome plated molding shaped stainless steel SUS 316
- ◆ Light Window: step tempered glass. T=7mm
- ◆ Gasket: silicone gasket
- ◆ Optional lens angle:9°, 15°, 20°, 30°, 45°, 60°
- ◆ PCB: excellent heat conductivity aluminum, coefficient of heat conductivity≥2.0w/mk
- ◆ LED colour temperature: 2,000K•3,000K•6,000K
- ◆ LED Driver: Constant Voltage Input, Constant Current Output
- ◆ Application environment: temperature of water between -20°C~40°C less than 1 meter depth
- ◆ Mounting sleeve: PC/ABS ALLOYS
- ◆ Power cable: 3m STW 18AWG



PERFORMANCE

Type	Light source	The manufacturer selected lens degree(θ1/2)	Input voltage (v)	Typical operating current (mA)	Typical consumption (w)	Typical luminance (lm)	IK rate
HX69B-3	1x3W	30°	24V DC	110	2.6	Cool white=174 Warm white=139	06



DESCRIPTION

The recessed underwater light series is your solution to tight spaces. Whether installed free-standing or recessed, the HX69B provides sufficient illumination for most residential and indoor water features. This compact fixture is easily hidden from sight or even integrated with the hardscape to achieve better ambience. All Ideal LED lights can be programmed to dim, synchronize to create infinite combinations of kaleidoscopic displays.

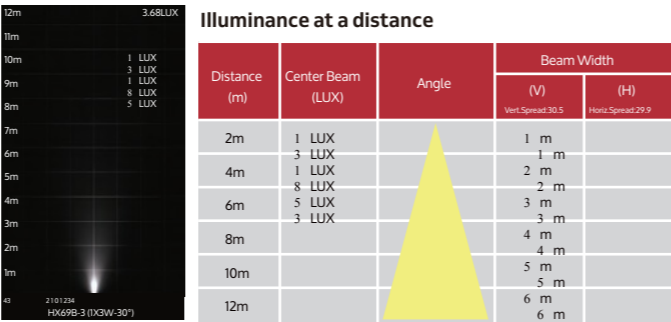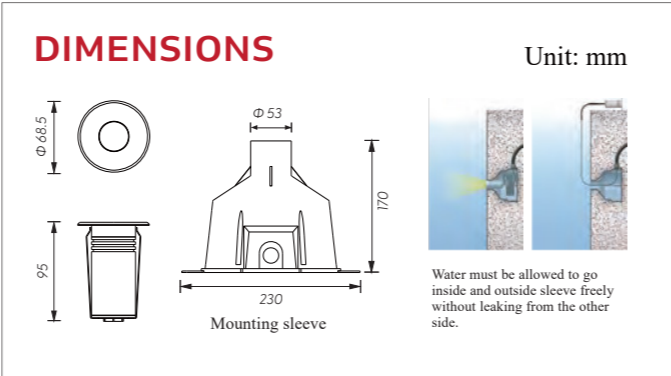

Small Type Recessed LED Pool Light

HX69B-3T
Symmetrical



Warning:
Must be installed underwater to prevent being damaged from over heating.



SPECIFICATIONS

- ◆ Front cover & Housing: hard chrome plated molding shaped stainless steel SUS 316
- ◆ Light Window: step tempered glass. T=7mm
- ◆ Gasket: silicone gasket
- ◆ PCB: excellent heat conductivity aluminum, coefficient of heat conductivity≥2.0w/mk
- ◆ Application environment: temperature of water between -20°C~40°C less than 1 meter depth
- ◆ Mounting sleeve: PC/ABS ALLOYS
- ◆ Power cable: 3m STW 18AWG





PERFORMANCE


Type	Light source	The manufacturer selected lens degree(θ1/2)	Input voltage (v)	Typical operating current (mA)	Typical consumption (w)	Typical luminance (lm)	IK rate
HX69B-3T	1x3W RGB 3in1 Full color	30°	24V DC	R =48 G=62 B=62	4.1	103	06



DESCRIPTION

The recessed underwater light series is your solution to tight spaces. Whether installed free-standing or recessed, the HX69B provides sufficient illumination for most residential and indoor water features. This compact fixture is easily hidden from sight or even integrated with the hardscape to achieve better ambience. All Ideal LED lights can be programmed to dim, colour- change and synchronize to create infinite combinations of kaleidoscopic displays.

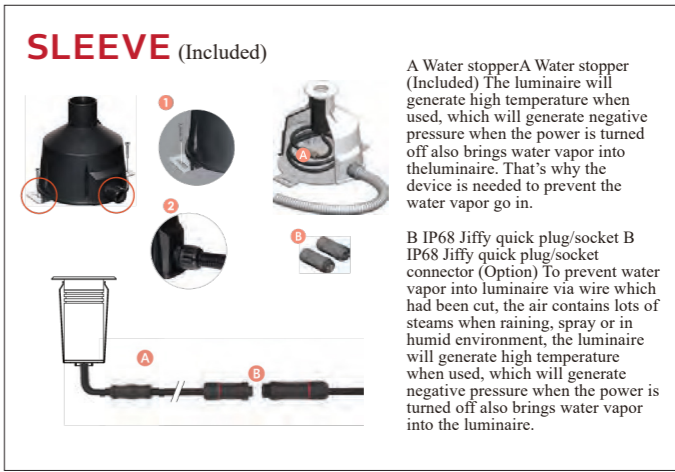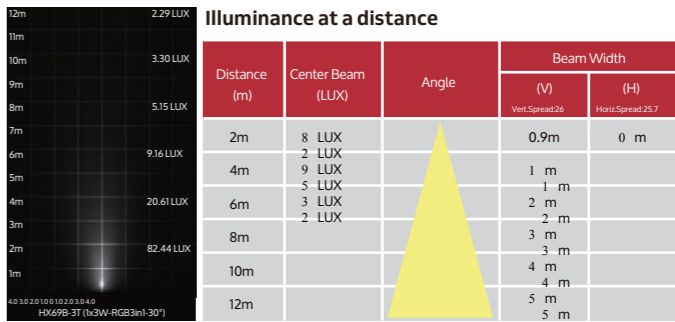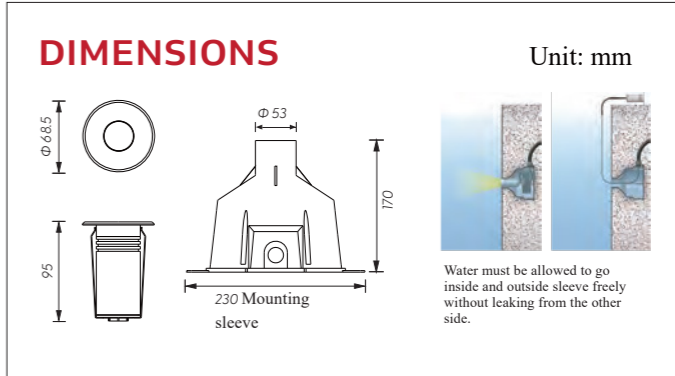



Small Type Recessed LED Pool Light

HX69B-3E
Asymmetrical




Warning:

Must be installed in a place where contact water or under water to prevent being damaged from over heating.




DESCRIPTION

The recessed underwater light series is your solution to tight spaces. Whether installed free-standing or recessed, the HX69B provides sufficient illumination for most residential and indoor water features. This compact fixture is easily hidden from sight or even integrated with the hardscape to achieve better ambience. All Ideal LED lights can be programmed to dim, synchronize to create infinite combinations of kaleidoscopic displays.

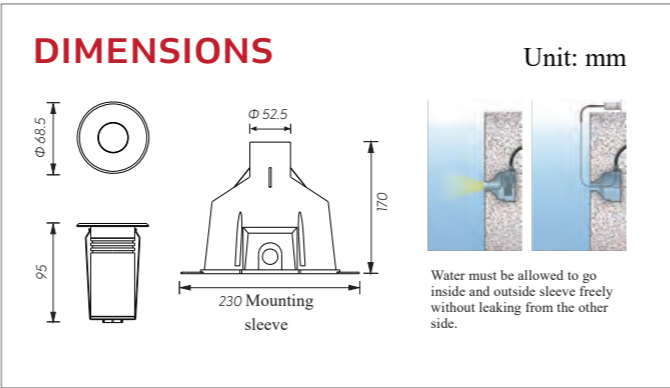

SPECIFICATIONS

- ◆ Front cover & Housing: hard chrome plated molding shaped stainless steel SUS 316
- ◆ Light Window: step tempered glass. T=7mm
- ◆ Gasket: silicone gasket
- ◆ PCB: excellent heat conductivity aluminum, coefficient of heat conductivity≥2.0w/mk
- ◆ Application environment: temperature of water between -20°C~40°C less than 1 meter depth
- ◆ Mounting sleeve: PC/ABS ALLOYS
- ◆ Power cable: 3m STW 18AWG



Illuminance at a distance

Distance (m)	Center Beam (LUX)	Angle	Beam Width	
			(V)	(H)
2m	5 LUX 1 LUX		1.0m	0.8m
4m	5 LUX 3 LUX		1.9m	1.6m
6m	3 LUX 2 LUX		2.9m	2.4m
8m	1 LUX		3.8m	3.2m
10m			4.8m	4.0m
12m			5.7m	4.7m

PERFORMANCE

Type	Light source	The manufacturer selected lens degree(θ1/2)	Input voltage (v)	Typical operating current (mA)	Typical consumption (w)	Typical luminance (lm)	IK rate
HX69B-3E	1x3W	45°/35°	24V DC	110	2.6	Cool white=143 Warm white=115	06




Wall Recessed LED Pool Light

HX135B-S12
Symmetrical



Warning:


Must be installed in a place where contact water or under water to prevent being damaged from over heating.

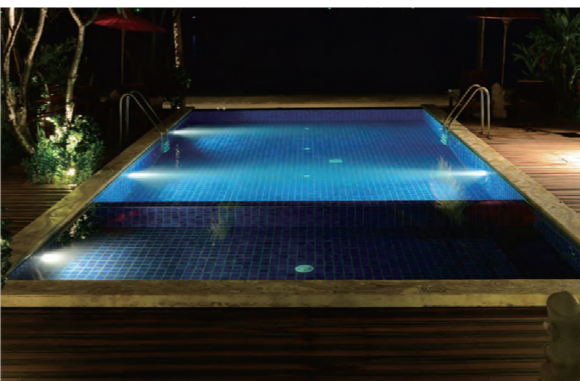

DESCRIPTION



The simple yet elegant design of the recessed LED underwater light series adds a touch of refinement to any pool. The HX135B is the most compact in the series. Perfect for lighting shallow pools and spas as well as water displays up to a 2-metre spray height, its robust construction allows it to be installed in walls and on floors.

All Ideal LED lights can be programmed to dim, synchronize to create infinite combinations of kaleidoscopic displays.

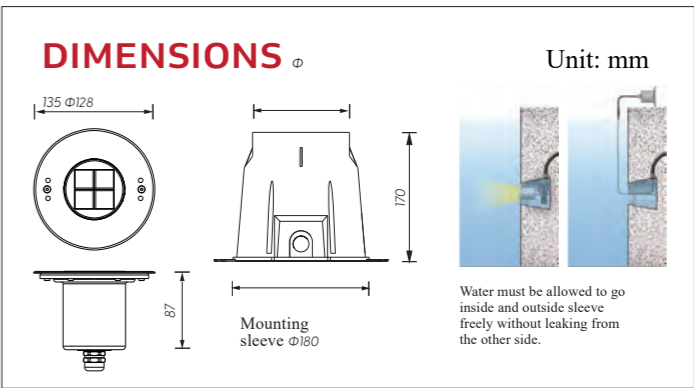


SPECIFICATIONS


- ◆ Front cover & Housing: hard chrome plated molding shaped stainless steel SUS 316L
- ◆ Light Window: step tempered glass. T=8mm
- ◆ Gasket: silicone gasket
- ◆ Optional lens angle:20°, 30°, 50°
- ◆ PCB: excellent heat conductivity aluminum, coefficient of heat conductivity≥2.0w/mk
- ◆ LED colour temperature: 2,000K•3,000K•6,000K
- ◆ LED Driver: Constant Voltage Input, Constant Current Output
- ◆ Application environment: temperature of water between -20°C~40°C less than 1 meter depth
- ◆ Built-in overheat sensor system: automatic shutdown at 75°C
- ◆ Mounting sleeve: PC/ABS ALLOYS
- ◆ Cable gland: IP-68 PG-11 copper with nickel-coated
- ◆ Power cable: 3m STW 18AWG

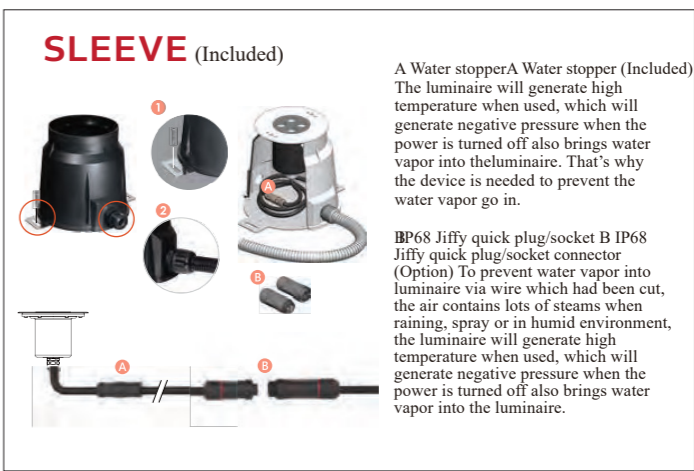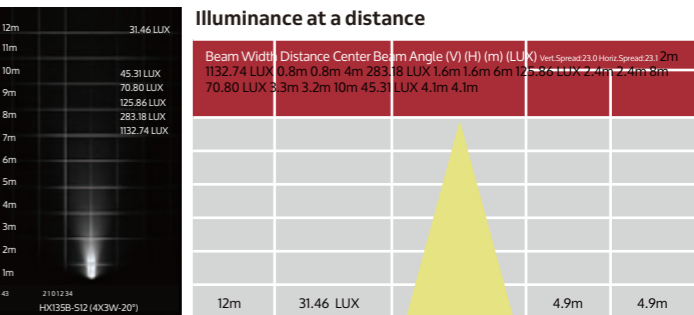

PERFORMANCE

Type	Light source	The manufacturer selected lens degree(θ1/2)	Input voltage (v)	Typical operating current (mA)	Typical consumption (w)	Typical luminance (lm)	IK rate
HX135B-S12	4x3W	20°	24V DC	510	12.2	997	08





Wall Recessed LED Pool Light



HX135B-8T
Symmetrical




Warning:
Must be installed underwater to prevent being damaged from over heating.




DESCRIPTION

The simple yet elegant design of the recessed LED underwater light series adds a touch of refinement to any pool.
The HX135B is the most compact in the series. Perfect for lighting shallow pools and spas as well as water displays up to a 2-metre spray height, its robust construction allows it to be installed in walls and on floors.
All Ideal LED lights can be programmed to dim, colour-change and synchronize to create infinite combinations of kaleidoscopic displays.

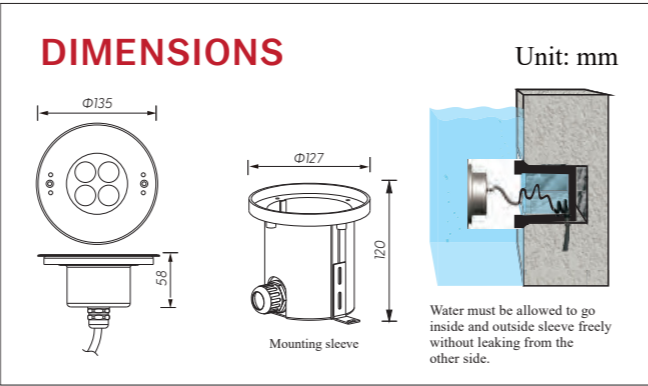

SPECIFICATIONS

- Front cover & Housing: hard chrome plated molding shaped stainless steel SUS 316L
- Light Window: step tempered glass. T=8mm
- Gasket: silicone gasket
- PCB: excellent heat conductivity aluminum, coefficient of heat conductivity≥2.0w/mk
- Application environment: temperature of water between -20°C~40°C, less than 1 meter depth
- Mounting sleeve: PC/ABS ALLOYS
- Cable gland: IP-68 PG-11 copper with nickel-coated
- Power cable: 3m STW 18AWG



Illuminance at a distance

Distance (m)	Center Beam Angle (°)	Beam Width (m)	Illuminance (LUX)	
			(V)	(H)
2m	169.73 LUX	0.8m	0.7m	4m
4m	42.43 LUX	1.7m	6m	18.86 LUX
2.5m	2.1m	8m		
10.61 LUX	3.3m	2.8m	10m	6.79 LUX
4.1m	5m			1.4m
12m	4.71 LUX			5.0m
				4.2m

PERFORMANCE

Type	Light source	The manufacturer selected lens degree(°1/2)	Input voltage (v)	Typical operating current (mA)	Typical consumption (w)	Typical luminance (lm)	IK rate
HX135B-8T	4x2W RGB 3in1 Full color	30°	24 VDC	R=200 G=215 B=215	15	262	08


Wall Recessed LED Pool Light



HX135B-S12E
Asymmetrical




Warning:
Must be installed underwater to prevent being damaged from over heating.

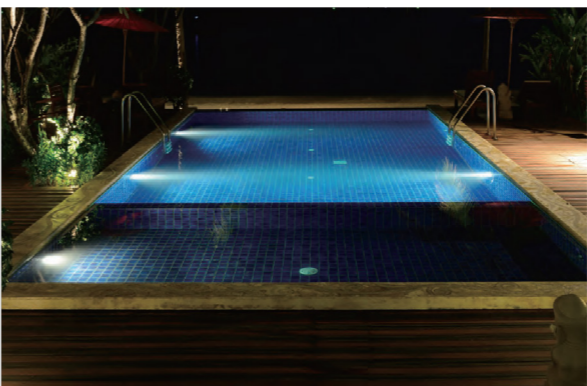

DESCRIPTION

The simple yet elegant design of the recessed LED underwater light series adds a touch of refinement to any pool.
The HX135B is the most compact in the series. Perfect for lighting shallow pools and spas as well as water displays up to a 2-metre spray height, its robust construction allows it to be installed in walls and on floors.
All Ideal LED lights can be programmed to dim, synchronize to create infinite combinations of kaleidoscopic displays.

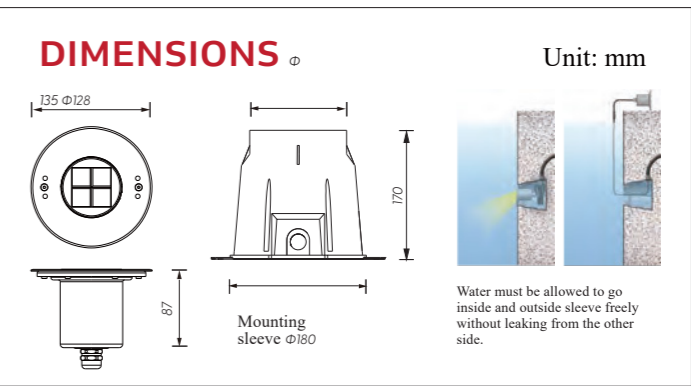


SPECIFICATIONS

- ◆ Front cover & Housing: hard chrome plated molding shaped stainless steel SUS 316L
- ◆ Light Window: step tempered glass. T=8mm
- ◆ Gasket: silicone gasket
- ◆ Optional lens angle:10°×14°, 21°×29°
- ◆ LED colour temperature: 2,000K•3,000K•6,000K
- ◆ PCB: excellent heat conductivity aluminum, coefficient of heat conductivity≥2.0w/mk
- ◆ LED Driver: Constant Voltage Input, Constant Current Output
- ◆ Application environment: temperature of water between -20°C~40°C less than 1 meter depth
- ◆ Built-in overheat sensor system: automatic shutdown at 75°C
- ◆ Mounting sleeve: PC/ABS ALLOYS
- ◆ Cable gland: IP-68 PG-11 copper with nickel-coated
- ◆ Power cable: 3m STW 18AWG

PERFORMANCE


Type	Light source	The manufacturer selected lens degree(°1/2)	Input voltage (v)	Typical operating current (mA)	Typical consumption (w)	Typical luminance (lm)	IK rate
HX135B-S12E	4x3W	21°×29°	24V DC	510	12.2	926	08

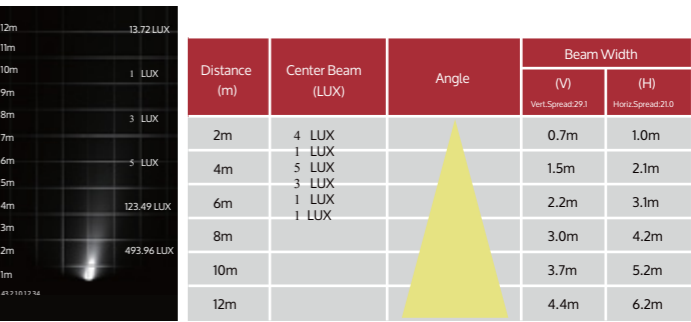

SLEEVE (Included)

A Water stopperA Water stopper (Included) The luminaire will generate high temperature when used, which will generate negative pressure when the power is turned off also brings water vapor into theluminaire. That's why the device is needed to prevent the water vapor go in.

BP68 Jiffy quick plug/socket connectIP68 Jiffy quick plug/socket connector (Option) To prevent water vapor into luminaire via wire which had been cut, the air contains lots of steams when raining, spray or in humid environment, the luminaire will generate high temperature when used, which will generate negative pressure when the power is turned off also brings water vapor into the luminaire.



Wall Recessed LED Pool Light



HX180B-S18
Symmetrical



Warning:
Must be installed underwater to prevent being damaged from over heating.




DESCRIPTION

The simple yet elegant design of the recessed LED underwater light series adds a touch of refinement to any pool.

The HX180B is ideal for lighting wading pools and spas as well as water displays up to a 5-metre spray height.


Its robust construction allows it to be installed in walls and on floors.

All Ideal LED lights can be programmed to dim, synchronize to create infinite combinations of kaleidoscopic displays.

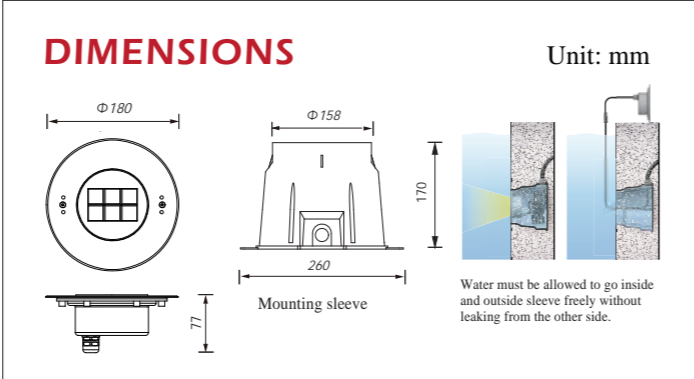

SPECIFICATIONS

- ◆ Front cover & Housing: hard chrome plated molding shaped stainless steel SUS 316L
- ◆ Light Window: step tempered glass. T=8mm
- ◆ Gasket: silicone gasket
- ◆ Optional lens angle:20°, 30°, 50°
- ◆ PCB: excellent heat conductivity aluminum, coefficient of heat conductivity≥2.0w/mk
- ◆ LED colour temperature: 2,000K•3,000K•6,000K
- ◆ LED Driver: Constant Voltage Input, Constant Current Output
- ◆ Application environment: temperature of water between -20℃~40℃ less than 1 meter depth
- ◆ Built-in overheat sensor system: automatic shutdown at 75℃
- ◆ Mounting sleeve: PC/ABS ALLOYS
- ◆ Cable gland: IP-68 PG-11 copper with nickel-coated
- ◆ Power cable: 3m STW 18AWG

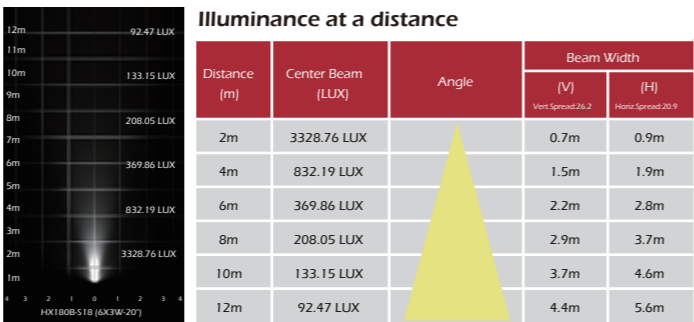

PERFORMANCE

Type	Light source	The manufacturer selected lens degree(°1/2)	Input voltage (v)	Typical operating current (mA)	Typical consumption (w)	Typical luminance (lm)	IK rate
HX180B-S18	6x3W	20°	24V DC	1020	24.5	1354	08

Wall Recessed LED Pool Light



HX180B-12T
Symmetrical



Warning:
Must be installed underwater to prevent being damaged from over heating.




DESCRIPTION

The simple yet elegant design of the recessed LED underwater light series adds a touch of refinement to any pool.


The HX180B is ideal for lighting wading pools and spas as well as water displays up to a 5-metre spray height. Its robust construction allows it to be installed in walls and on floors.

All Ideal LED lights can be programmed to dim, colour- change and synchronize to create infinite combinations of kaleidoscopic displays.

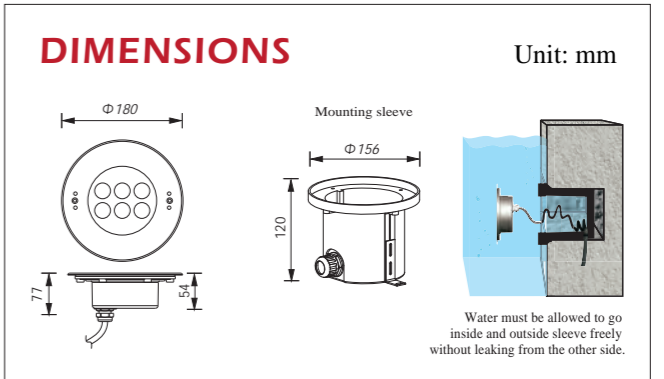

SPECIFICATIONS

- ◆ Front cover & Housing: hard chrome plated molding shaped stainless steel SUS 316L
- ◆ Light Window: step tempered glass. T=8mm
- ◆ Gasket: silicone gasket
- ◆ PCB: excellent heat conductivity aluminum, coefficient of heat conductivity≥2.0w/mk
- ◆ Application environment: temperature of water between -20℃~40℃, less than 1 meter depth
- ◆ Mounting sleeve: PC/ABS ALLOYS
- ◆ Cable gland: IP-68 PG-11 copper with nickel-coated
- ◆ Power cable: 3m STW 18AWG

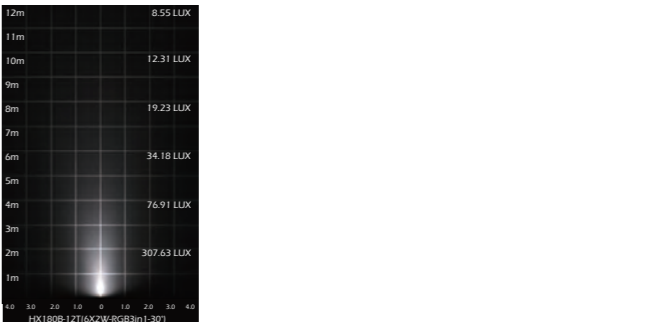

Illuminance at a distance

Distance (m)	Center Beam (LUX)	Angle	Beam Width	
			(V)	(H)
2m	307.63 LUX		1.0m	1.0m
4m	76.91 LUX		2.0m	2.0m
6m	34.18 LUX		3.0m	2.5m
8m	19.23 LUX		4.0m	3.5m
10m	12.31 LUX		5.0m	4.5m
12m	8.55 LUX		6.0m	5.5m

PERFORMANCE

Type	Light source	The manufacturer selected lens degree(°1/2)	Input voltage (v)	Typical operating current (mA)	Typical consumption (w)	Typical luminance (lm)	IK rate
HX180B-12T	6x2W RGB 3in1 Full color	30°	24V DC	R=300 G=350 B=350	24	547	08

Wall Recessed LED Pool Light



HX180B-S18E
Asymmetrical




Warning:
Must be installed underwater to prevent being damaged from over heating.




DESCRIPTION

The simple yet elegant design of the recessed LED underwater light series adds a touch of refinement to any pool. The HX180B is ideal for lighting wading pools and spas as well as water displays up to a 5-metre spray height. Its robust construction allows it to be installed in walls and on floors. All Ideal LED lights can be programmed to dim, synchronize to create infinite combinations of kaleidoscopic displays.

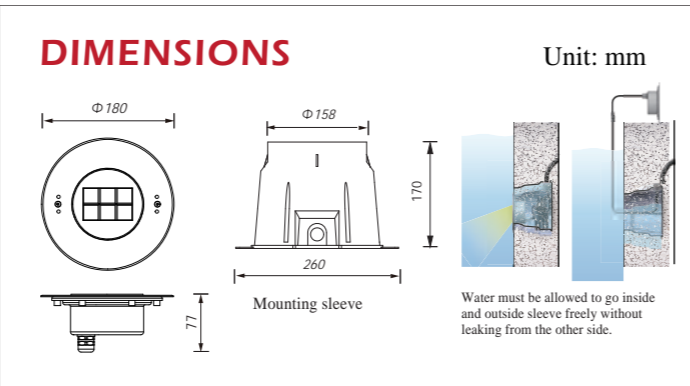

SPECIFICATIONS

- ◆ Front cover & Housing: hard chrome plated molding shaped stainless steel SUS 316L
- ◆ Light Window: step tempered glass. T=8mm
- ◆ Gasket: silicone gasket
- ◆ Optional lens angle:10°×14°, 21°×29°
- ◆ PCB: excellent heat conductivity aluminum, coefficient of heat conductivity≥2.0w/mk
- ◆ LED colour temperature: 2,000K•3,000K•6,000K
- ◆ LED Driver: Constant Voltage Input, Constant Current Output
- ◆ Application environment: temperature of water between -20℃~40℃ less than 1 meter depth
- ◆ Built-in overheat sensor system: automatic shutdown at 75℃
- ◆ Recessed sleeve: PC/ABS ALLOYS
- ◆ Cable gland: IP-68 PG-11 copper with nickel-coated
- ◆ Power cable: 3m STW 18AWG

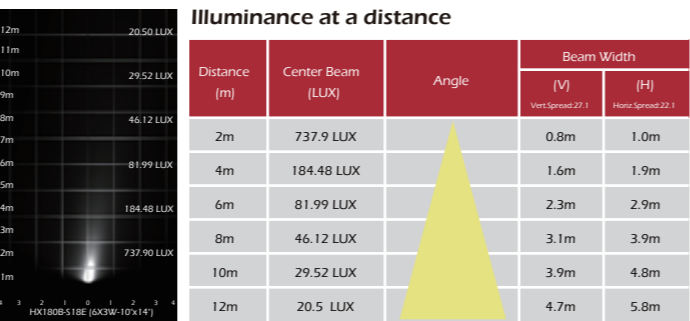

PERFORMANCE

Type	Light source	The manufacturer selected lens degree(Θ1/2)	Input voltage (v)	Typical operating current (mA)	Typical consumption (w)	Typical luminance (lm)	IK rate
HX180B-S18E	6x3W	21°×29°	24V DC	1020	24.5	1210	08

Wall Recessed LED Pool Light



HX205B-S36
Symmetrical




Warning:
Must be installed underwater to prevent being damaged from over heating.




DESCRIPTION

The simple yet elegant design of the recessed LED underwater light series adds a touch of refinement to any pool. With a power consumption of only 36W, the HX205B provides powerful yet efficient illumination for swimming pools as well as water displays up to a 8-metre spray height. Its robust construction allows it to be installed in walls and on floors. All Ideal LED lights can be programmed to dim, synchronize to create infinite combinations of kaleidoscopic displays.

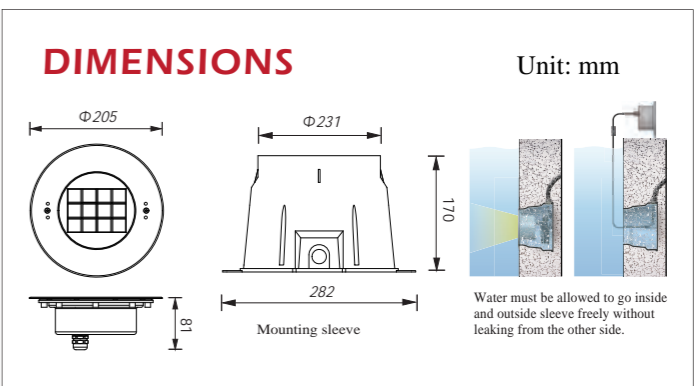

SPECIFICATIONS

- ◆ Front cover & Housing: hard chrome plated molding shaped stainless steel SUS 316L
- ◆ Light Window: step tempered glass. T=10mm
- ◆ Gasket: silicone gasket
- ◆ Optional lens angle:20°, 30°, 45°
- ◆ PCB: excellent heat conductivity aluminum, coefficient of heat conductivity≥2.0w/mk
- ◆ LED colour temperature: 2,000K•3,000K•6,000K
- ◆ LED Driver: Constant Voltage Input, Constant Current Output
- ◆ Application environment: temperature of water between -20℃~40℃ less than 1 meter depth
- ◆ Built-in overheat sensor system: automatic shutdown at 75℃
- ◆ Recessed sleeve: PC/ABS ALLOYS
- ◆ Cable gland: IP-68 PG-11 copper with nickel-coated
- ◆ Power cable: 3m STW 18AWG

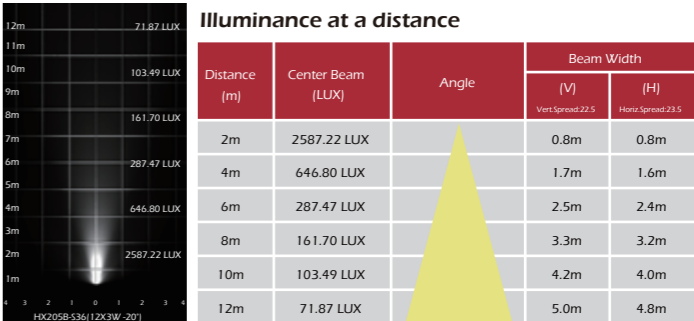

PERFORMANCE

Type	Light source	The manufacturer selected lens degree(Θ1/2)	Input voltage (v)	Typical operating current (mA)	Typical consumption (w)	Typical luminance (lm)	IK rate
HX205B-S36	12x3W	20°	24V DC	1520	36.5	2522	08

Wall Recessed LED Pool Light



HX205B-24T
Symmetrical




Warning:
Must be installed underwater to prevent being damaged from over heating.




DESCRIPTION

The simple yet elegant design of the recessed LED underwater light series adds a touch of refinement to any pool. With a power consumption of only 24W, the HX205B provides powerful yet efficient illumination for swimming pools as well as water displays up to a 8-metre spray height. Its robust construction allows it to be installed in walls and on floors. All Ideal LED lights can be programmed to dim, colour- change and synchronize to create infinite combinations of kaleidoscopic displays.

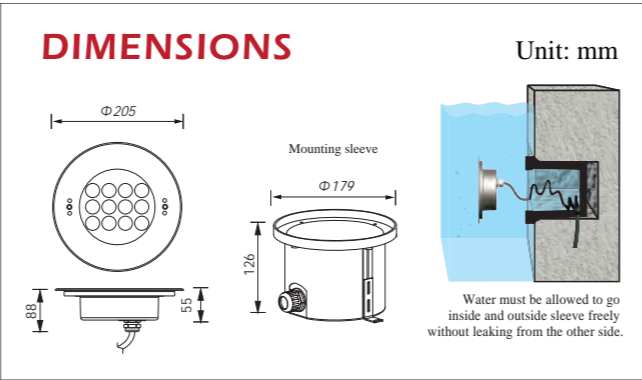

SPECIFICATIONS

- ◆ Front cover & Housing: hard chrome plated molding shaped stainless steel SUS 316L
- ◆ Light Window: step tempered glass. T=10mm
- ◆ Gasket: silicone gasket
- ◆ PCB: excellent heat conductivity aluminum, coefficient of heat conductivity≥2.0w/mk
- ◆ Application environment: temperature of water between -20℃~40℃ less than 1 meter depth
- ◆ Mounting sleeve: PC/ABS ALLOYS
- ◆ Cable gland: IP-68 PG-11 copper with nickel-coated
- ◆ Power cable: 3m STW 18AWG



Illuminance at a distance

Distance (m)	Center Beam (LUX)	Angle	Beam Width	
			(V)	(H)
2m	488.13 LUX		1.0m	1.0m
4m	122.03 LUX		2.0m	2.0m
6m	54.24 LUX		3.1m	3.0m
8m	30.51 LUX		4.1m	4.0m
10m	19.53 LUX		5.1m	5.0m
12m	13.56 LUX		6.1m	6.0m

PERFORMANCE

Type	Light source	The manufacturer selected lens degree(Θ1/2)	Input voltage (v)	Typical operating current (mA)	Typical consumption (w)	Typical luminance (lm)	IK rate
HX205B-24T	12x2W RGB 3in1 Full color	30°	24V DC	R=400 G=500 B=500	33.6	805	08

Wall Recessed LED Pool Light



HX205B-S36E
Asymmetrical




Warning:
Must be installed underwater to prevent being damaged from over heating.




DESCRIPTION

The simple yet elegant design of the recessed LED underwater light series adds a touch of refinement to any pool. With a power consumption of only 36W, the HX205B provides powerful yet efficient illumination for swimming pools as well as water displays up to a 8-metre spray height. Its robust construction allows it to be installed in walls and on floors. All Ideal LED lights can be programmed to dim, synchronize to create infinite combinations of kaleidoscopic displays.

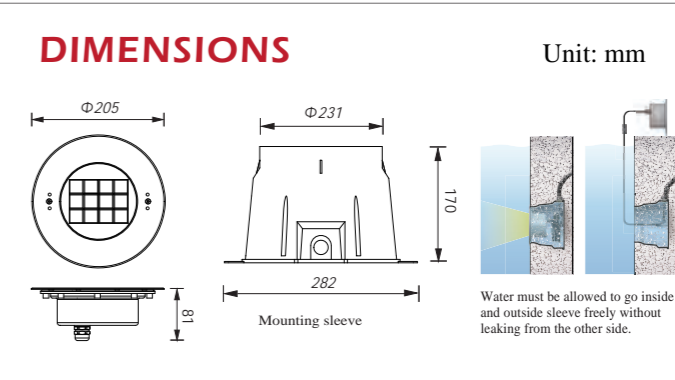

SPECIFICATIONS

- ◆ Front cover & Housing: hard chrome plated molding shaped stainless steel SUS 316L
- ◆ Light Window: step tempered glass. T=8mm
- ◆ Gasket: silicone gasket
- ◆ Optional lens angle:10°×14°, 21°×29°
- ◆ PCB: excellent heat conductivity aluminum, coefficient of heat conductivity≥2.0w/mk
- ◆ LED colour temperature: 2,000K•3,000K•6,000K
- ◆ LED Driver: Constant Voltage Input, Constant Current Output
- ◆ Application environment: temperature of water between -20℃~40℃ less than 1 meter depth
- ◆ Built-in overheat sensor system: automatic shutdown at 75℃
- ◆ Mounting sleeve: PC/ABS ALLOYS
- ◆ Cable gland: IP-68 PG-11 copper with nickel-coated
- ◆ Power cable: 3m STW 18AWG

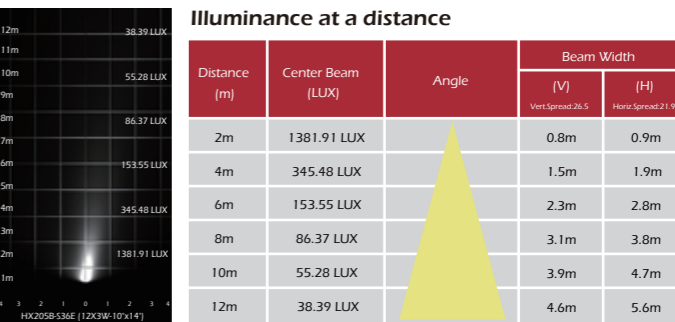

SLEEVE (Included)

A Water stopper (Included)
The luminaire will generate high temperature when used, which will generate negative pressure when the power is turned off also brings water vapor into theluminaire. That's why the device is needed to prevent the water vapor go in.

B IP68 Jiffy quick plug/socket connector (Option)
To prevent water vapor into luminaire via wire which had been cut, the air contains lots of steams when raining, spray or in humid environment, the luminaire will generate high temperature when used, which will generate negative pressure when the power is turned off also brings water vapor into the luminaire.

PERFORMANCE

Type	Light source	The manufacturer selected lens degree(Θ1/2)	Input voltage (v)	Typical operating current (mA)	Typical consumption (w)	Typical luminance (lm)	IK rate
HX205B-S36E	12x3W	21°×29°	24V DC	1520	36.5	2369	08

Wall Recessed LED Pool Light



HX250B-S60
Symmetrical




Warning:
Must be installed underwater to prevent being damaged from over heating.



DESCRIPTION


The simple yet elegant design of the recessed LED underwater light series adds a touch of refinement to any pool. With a power consumption of only 60W, the HX250B provides powerful yet efficient illumination for swimming pools as well as water displays up to a 8-metre spray height. Its robust construction allows it to be installed in walls and on floors.

All Ideal LED lights can be programmed to dim, synchronize to create infinite combinations of kaleidoscopic displays.

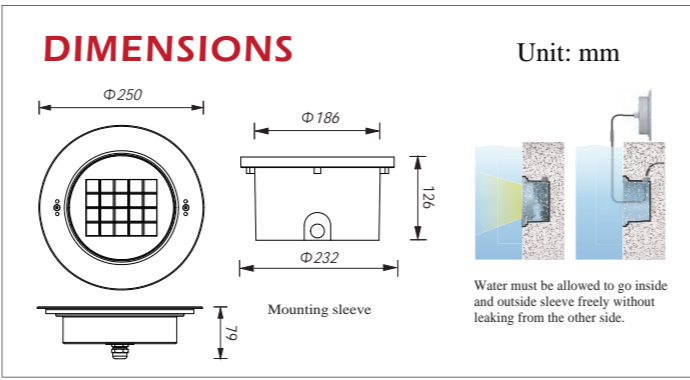

SPECIFICATIONS

- ◆ Front cover & Housing: hard chrome plated molding shaped stainless steel SUS 316L
- ◆ Light Window: step tempered glass. T=10mm
- ◆ Gasket: silicone gasket
- ◆ Optional lens angle:20°, 30°, 45°
- ◆ PCB: excellent heat conductivity aluminum, coefficient of heat conductivity≥2.0w/mk
- ◆ LED colour temperature: 2,000K•3,000K•6,000K
- ◆ LED Driver: Constant Voltage Input, Constant Current Output
- ◆ Application environment: temperature of water between -20℃~40℃ less than 1 meter depth
- ◆ Built-in overheat sensor system: automatic shutdown at 75℃
- ◆ Mounting sleeve: PC/ABS ALLOYS
- ◆ Cable gland: IP-68 PG-11 copper with nickel-coated
- ◆ Power cable: 3m STW 18AWG

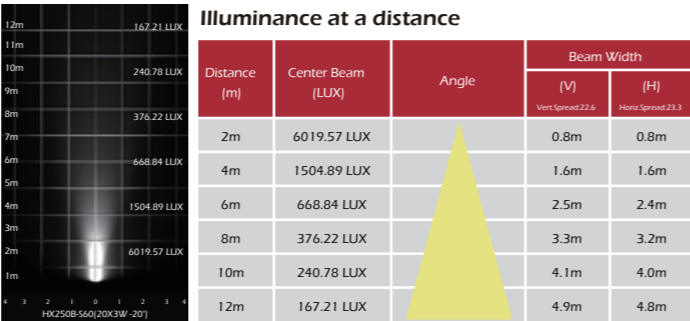

PERFORMANCE

Type	Light source	The manufacturer selected lens degree(θ1/2)	Input voltage (v)	Typical operating current (mA)	Typical consumption (w)	Typical luminance (lm)	IK rate
HX250B-S36	20x3W	20°	24V DC	3050	73.2	5561	10


Wall Recessed LED Pool Light



HX250B-36T
Symmetrical




Warning:
Must be installed underwater to prevent being damaged from over heating.

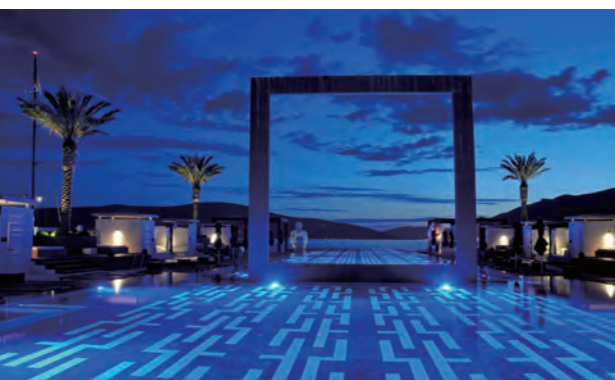

DESCRIPTION

The simple yet elegant design of the recessed LED underwater Light series adds a touch of refinement to any pool. With a power consumption of only 36W, the HX250B provides powerful yet efficient illumination for swimming pools as well as water displays up to a 10-metre spray height. Its robust construction allows it to be installed in walls and on floors.

All Ideal LED lights can be programmed to dim, colour- change and synchronize to create infinite combinations of kaleidoscopic displays.

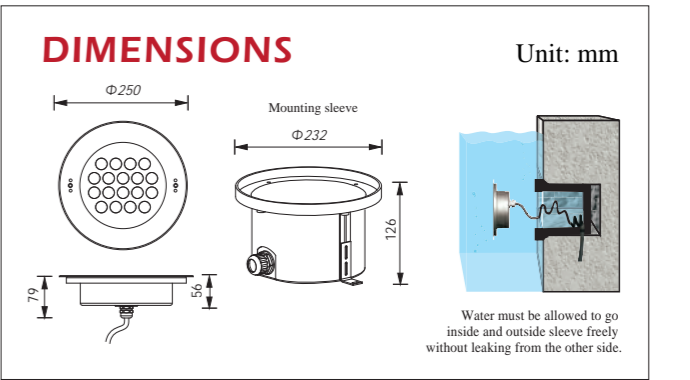

SPECIFICATIONS

- ◆ Front cover & Housing: hard chrome plated molding shaped stainless steel SUS 316L
- ◆ Light Window: step tempered glass. T=10mm
- ◆ Gasket: silicone gasket
- ◆ PCB: excellent heat conductivity aluminum, coefficient of heat conductivity≥2.0w/mk
- ◆ Application environment: temperature of water between -20℃~40℃, less than 1 meter depth
- ◆ Mounting sleeve: PC/ABS ALLOYS
- ◆ Cable gland: IP-68 PG-11 copper with nickel-coated
- ◆ Power cable: 3m STW 18AWG




Illuminance at a distance

Distance (m)	Center Beam (LUX)	Angle	Beam Width	
			(V)	(H)
2m	609.37 LUX		1.0m	1.0m
4m	152.34 LUX		2.1m	1.9m
6m	67.71 LUX		3.1m	2.9m
8m	38.09 LUX		4.1m	3.8m
10m	24.37 LUX		5.1m	4.8m
12m	16.93 LUX		6.2m	5.8m

PERFORMANCE

Type	Light source	The manufacturer selected lens degree(θ1/2)	Input voltage (v)	Typical operating current (mA)	Typical consumption (w)	Typical luminance (lm)	IK rate
HX250B-36T	18x2W RGB 3in1 Full color	30°	24V DC	R=630 G=770 B=770	52.0	1330	10



Wall Recessed LED Pool Light



HX250B-S60E
Asymmetrical




Warning:
Must be installed underwater to prevent being damaged from over heating.



DESCRIPTION


The simple yet elegant design of the recessed LED underwater light series adds a touch of refinement to any pool. With a power consumption of only 60W, the HX250B provides powerful yet efficient illumination for swimming pools as well as water displays up to a 8-metre spray height. Its robust construction allows it to be installed in walls and on floors.

All Ideal LED lights can be programmed to dim, synchronize to create infinite combinations of kaleidoscopic displays.

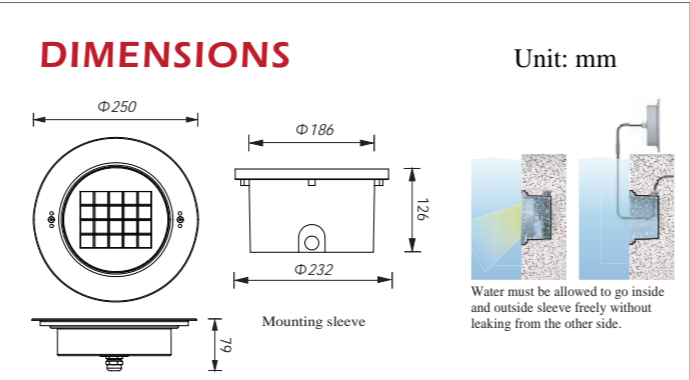

SPECIFICATIONS

- ◆ Front cover & Housing: hard chrome plated molding shaped stainless steel SUS 316L
- ◆ Light Window: step tempered glass, T=10mm
- ◆ Gasket: silicone gasket
- ◆ Optional lens angle:10°×14°, 21°×29°
- ◆ PCB: excellent heat conductivity aluminum, coefficient of heat conductivity≥2.0w/mk
- ◆ LED colour temperature: 2,000K•3,000K•6,000K
- ◆ LED Driver: Constant Voltage Input, Constant Current Output
- ◆ Application environment: temperature of water between -20℃~40℃ less than 1 meter depth
- ◆ Built-in overheat sensor system: automatic shutdown at 75℃
- ◆ Mounting sleeve: PC/ABS ALLOYS
- ◆ Cable gland: IP-68 PG-11 copper with nickel-coated
- ◆ Power cable: 3m STW 18AWG

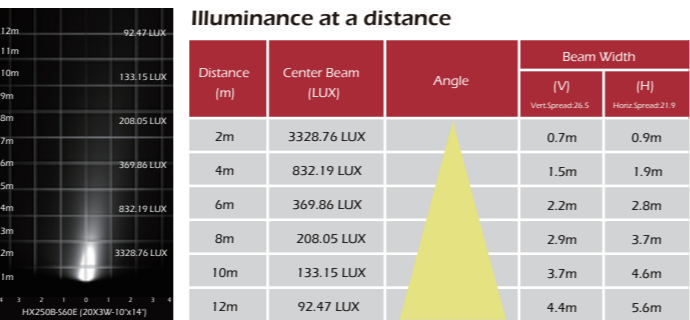

PERFORMANCE

Type	Light source	The manufacturer selected lens degree(Θ1/2)	Input voltage (v)	Typical operating current (mA)	Typical consumption (w)	Typical luminance (lm)	IK rate
HX250B-S60E	20x3W	21°×29°	24V DC	3050	73.2	5166	10


Wall Recessed LED Pool Light



HX355BL-S18
Symmetrical




Warning:
Must be installed underwater to prevent being damaged from over heating.

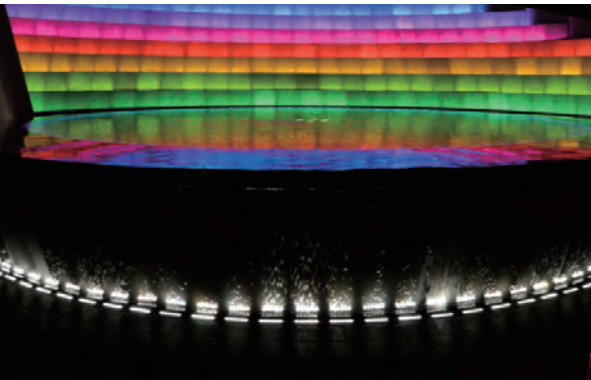

DESCRIPTION


The linear design of the recessed LED underwater light series opens up new possibilities when lighting your pool. The HX355BL is the answer when you need even and discreet illumination. Completely unobtrusive when recessed into the walls. It is ideal when used to provide added illumination where it is need most such as at the pool's stairs or along infinity edges.

All Ideal LED lights can be programmed to dim, synchronize to create infinite combinations of kaleidoscopic displays.

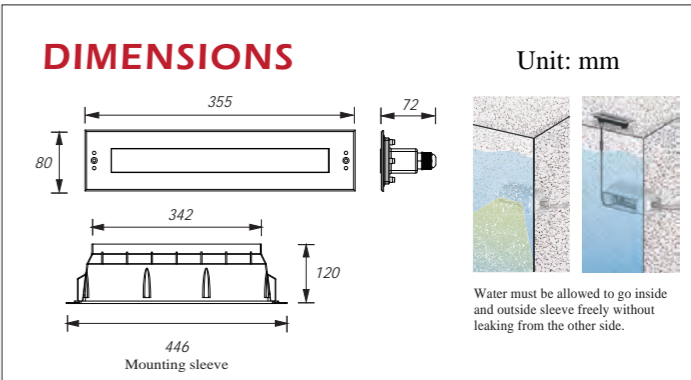


SPECIFICATIONS

- ◆ Front cover & Housing: hard chrome plated molding shaped stainless steel SUS 316L
- ◆ Light Window: PC
- ◆ Gasket: silicone gasket
- ◆ Optional lens angle:8° , 13° , 25° , 30°
- ◆ PCB: excellent heat conductivity aluminum, coefficient of heat conductivity≥2.0w/mk
- ◆ LED colour temperature: 2,000K•3,000K•6,000K
- ◆ LED Driver: Constant Voltage Input, Constant Current Output
- ◆ Application environment: temperature of water between -20℃~40℃ less than 1 meter depth
- ◆ Mounting sleeve: PC/ABS ALLOYS
- ◆ Cable gland: IP-68 PG-9 copper with nickel-coated
- ◆ Power cable: 3m STW 18AWG

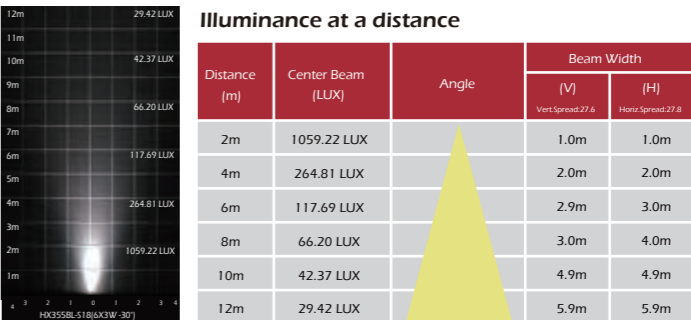

PERFORMANCE

Type	Light source	The manufacturer selected lens degree(Θ1/2)	Input voltage (v)	Typical operating current (mA)	Typical consumption (w)	Typical luminance (lm)	IK rate
HX355BL-S18	6x3W	30°	24V DC	950	22.8	Cool White=1578 Warm White=1324	10



Wall Recessed LED Pool Light



HX355BL-S18E
Asymmetrical




Warning:
Must be installed underwater to prevent being damaged from over heating.



DESCRIPTION


The linear design of the recessed LED underwater light series opens up new possibilities when lighting your pool. The HX355BL is the answer when you need even and discreet illumination. Completely unobtrusive when recessed into the walls. It is ideal when used to provide added illumination where it is needed most such as at the pool's stairs or along infinity edges.

All Ideal LED lights can be programmed to dim, synchronize to create infinite combinations of kaleidoscopic displays.

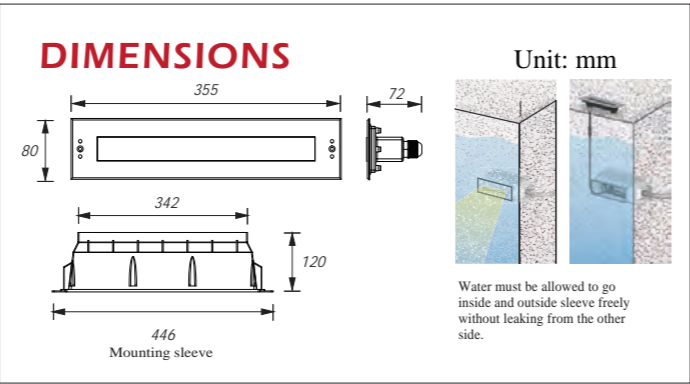

SPECIFICATIONS

- ◆ Front cover & Housing: hard chrome plated molding shaped stainless steel SUS 316L
- ◆ Light Window: PC
- ◆ Gasket: silicone gasket
- ◆ Optional lens angle: 45/35°
- ◆ PCB: excellent heat conductivity aluminum, coefficient of heat conductivity ≥ 2.0w/mk
- ◆ LED colour temperature: 2,000K•3,000K•6,000K
- ◆ LED Driver: Constant Voltage Input, Constant Current Output
- ◆ Application environment: Temperature of water between -20℃~40℃ less than 1 meter depth
- ◆ Mounting sleeve: PC/ABS ALLOYS
- ◆ Cable gland: IP-68 PG-9 copper with nickel-coated
- ◆ Power cable: 3m STW 18AWG

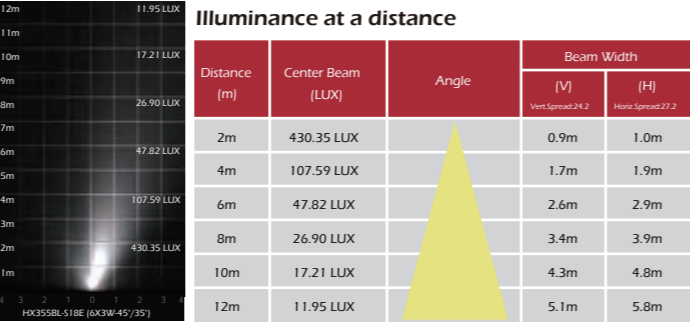

PERFORMANCE

Type	Light source	The manufacturer selected lens degree(Θ1/2)	Input voltage (v)	Typical operating current (mA)	Typical consumption (w)	Typical luminance (lm)	IK rate
HX355BL-S18E	6x3 W	45°/35°	24V DC	950	22.8	Cool white=1280 Warm white=1102	09

Fountain LED Ring Light



HX149R-18



Warning:
Must be installed underwater to prevent being damaged from over heating.




DESCRIPTION

The underwater ring light series is the ultimate lighting solution for all animated fountains.


The ring lights HX149R sports a G 3/4" threaded connection at its centre where a nozzle can be directly attached. With a 8mm thick tempered glass cover and a IK rating of 9, the underwater ring light is extremely rugged.

All Ideal LED lights can be programmed to dim, synchronize to create infinite combinations of kaleidoscopic displays.

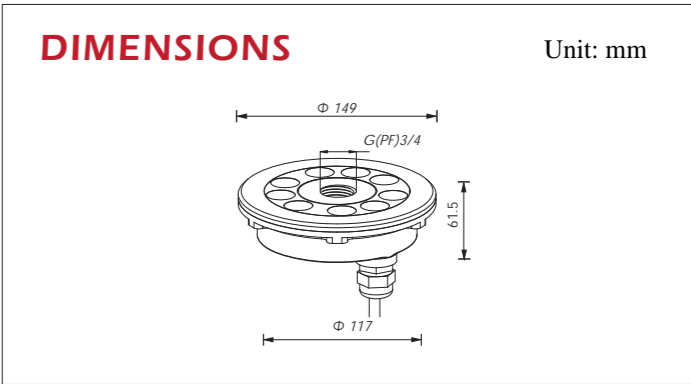

SPECIFICATIONS

- ◆ Housing: hard chrome plated molding shaped stainless steel SUS 316
- ◆ Front cover: hard chrome plated stainless steel SUS 316L
- ◆ Light Window: step tempered glass. T=8mm
- ◆ Gasket: silicone gasket
- ◆ PCB: Excellent heat conductivity aluminum, coefficient of heat conductivity ≥ 2.0w/mk
- ◆ Application environment: Temperature of water between -20℃~40℃ less than 1 meter depth
- ◆ Cable gland: IP-68 PG-11 copper with nickel-coated
- ◆ Power cable: 3m STW 18AWG

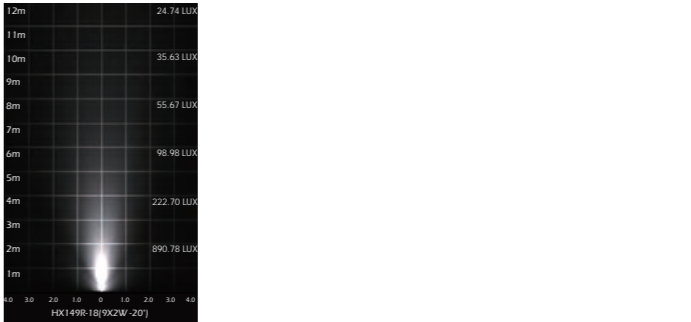

PERFORMANCE

Type	Light source	The manufacturer selected lens degree(Θ1/2)	Input voltage (v)	Typical operating current (mA)	Typical consumption (w)	Typical luminance (lm)	IK rate
HX149R-18	9x2W	20°	24V DC	646	15.5	Cool white=1317 Warm white=1054	09

Fountain LED Ring Light



HX149R-18T



Warning:
Must be installed in a place where contact water or under water to prevent being damaged from over heating.




DESCRIPTION

The underwater ring light series is the ultimate lighting solution for all animated fountains.


The ring lights HX149R sports a G 3/4”threaded connection at its centre where a nozzle can be directly attached. With a 8mm thick tempered glass cover and a IK rating of 9, the underwater ring light is extremely rugged.

All Ideal LED lights can be programmed to dim, colour- change and synchronize to create infinite combinations of kaleidoscopic displays.

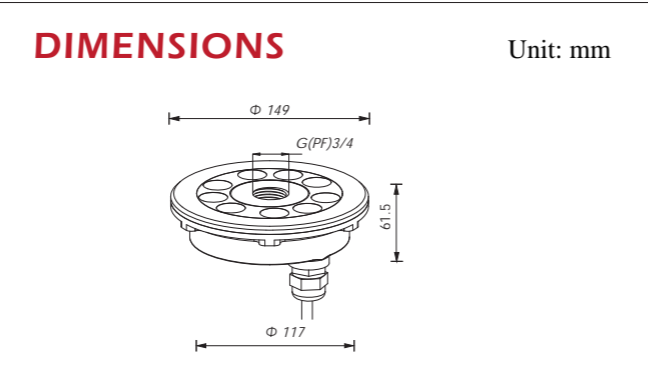

SPECIFICATIONS

- ◆ Housing: hard chrome plated molding shaped stainless steel SUS 316
- ◆ Front cover: hard chrome plated stainless steel SUS 316L
- ◆ Light Window: step tempered glass. T=8mm
- ◆ Gasket: silicone gasket
- ◆ PCB: excellent heat conductivity aluminum, coefficient of heat conductivity≥2.0w/mk
- ◆ Application environment: temperature of water between -20℃~40℃ less than 1 meter depth
- ◆ Cable gland: IP-68 PG-11 copper with nickel-coated
- ◆ Power cable: 3m STW 18AWG



Illuminance at a distance

Distance (m)	Center Beam (LUX)	Angle	Beam Width	
			(V)	(H)
2m	448.01 LUX		1.0m	0.9m
4m	112.00 LUX		1.9m	1.9m
6m	49.78 LUX		2.9m	2.8m
8m	28.00 LUX		3.9m	3.8m
10m	17.92 LUX		4.9m	4.7m
12m	12.44 LUX		5.8m	5.7m

PERFORMANCE

Type	Light source	The manufacturer selected lens degree(Θ1/2)	Input voltage (v)	Typical operating current (mA)	Typical consumption (w)	Typical luminance (lm)	IK rate
HX149R-18T	9x2W RGB 3in1 Full color	30°	24V DC	R=300 G=375 B=375	25.2	580	09

Fountain LED Ring Light



HX149R-12QD



Warning:
Must be installed in a place where contact water or under water to prevent being damaged from over heating.




DESCRIPTION

The underwater ring light series is the ultimate lighting solution for all animated fountains.


The ring lights HX149R sports a G 3/4”threaded connection at its centre where a nozzle can be directly attached. With a 8mm thick tempered glass cover and a IK rating of 9, the underwater ring light is extremely rugged.

RDM function: DMX address to be read and written. Provide operating voltage, current and temperature of light. Provide basic data such as supplier information.

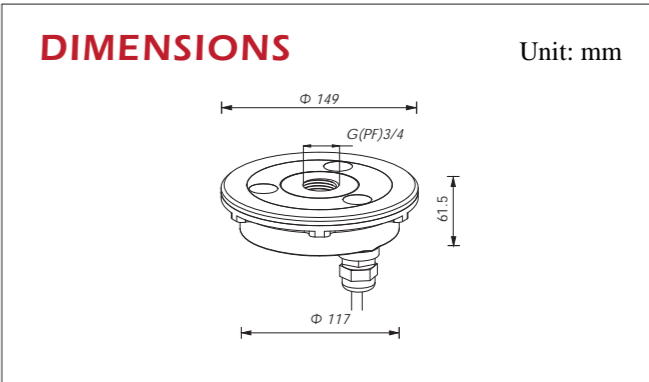

SPECIFICATIONS

- ◆ Housing: hard chrome plated molding shaped stainless steel SUS 316
- ◆ Front cover: hard chrome plated stainless steel SUS 316L
- ◆ Light Window: step tempered glass. T=8mm
- ◆ Gasket: silicone gasket
- ◆ PCB: Excellent heat conductivity aluminum, coefficient of heat conductivity≥2.0w/mk
- ◆ Application environment: Temperature of water between -20℃~40℃ less than 1 meter depth
- ◆ Cable gland: IP-68 PG-13.5 copper with nickel-coated
- ◆ Power cable: 3m STW 18AWG
- ◆ Signal type: DMX512/RDM signal



Illuminance at a distance

Distance (m)	Center Beam (LUX)	Angle	Beam Width	
			(V)	(H)
2m	522.00 LUX		1.0m	1.0m
4m	130.50 LUX		2.0m	2.0m
6m	58.00 LUX		3.0m	3.0m
8m	32.63 LUX		4.0m	4.0m
10m	20.88 LUX		5.0m	5.0m
12m	14.50 LUX		6.0m	6.1m

PERFORMANCE

Type	Light source	The manufacturer selected lens degree(Θ1/2)	Input voltage (v)	Typical operating current (mA)	Typical consumption (w)	Typical luminance (lm)	IK rate
HX149R-12QD	3x4W RGBW 4in1 Full color	30°	24V DC	520	12.5	438	09

Fountain LED Ring Light



HX170R-18



Warning:
Must be installed in a place where contact water or under water to prevent being damaged from over heating.




DESCRIPTION

The underwater ring light series is the ultimate lighting solution for all animated fountains.


The ring lights HX170R sports a G 3/4" threaded connection at its centre where a nozzle can be directly attached. With a 8mm thick tempered glass cover and a IK rating of 9, the underwater ring light is extremely rugged.

All Ideal LED lights can be programmed to dim, synchronize to create infinite combinations of kaleidoscopic displays.

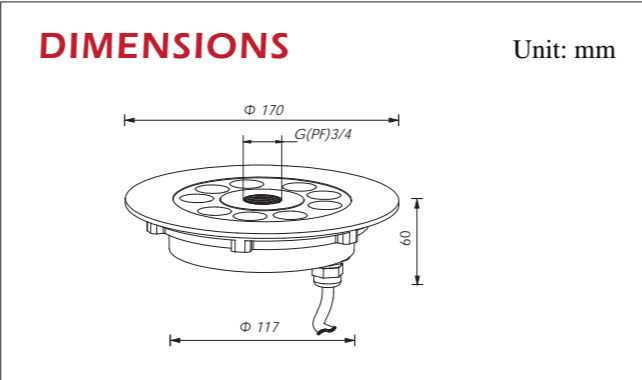

SPECIFICATIONS

- ◆ Housing: hard chrome plated molding shaped stainless steel SUS 316
- ◆ Front cover: hard chrome plated stainless steel SUS 316L
- ◆ Light Window: step tempered glass. T=8mm
- ◆ Gasket: silicone gasket
- ◆ PCB: Excellent heat conductivity aluminum, coefficient of heat conductivity≥2.0w/mk
- ◆ Application environment: Temperature of water between -20℃~40℃ less than 1 meter depth
- ◆ Cable gland: IP-68 PG-11 copper with nickel-coated
- ◆ Power cable: 3m STW 18AWG



Illuminance at a distance

Distance (m)	Center Beam (LUX)	Angle	Beam Width	
			(V)	(H)
2m	890.78 LUX		0.8m	0.7m
4m	222.70 LUX		1.6m	1.5m
6m	98.98 LUX		2.4m	2.2m
8m	55.67 LUX		3.2m	3.0m
10m	35.63 LUX		4.0m	3.7m
12m	24.74 LUX		4.7m	4.4m

PERFORMANCE

Type	Light source	The manufacturer selected lens degree(Θ 1/2)	Input voltage (v)	Typical operating current (mA)	Typical consumption (w)	Typical luminance (lm)	IK rate
HX170R-18	9x2W	20°	24V DC	646	15.5	Cool white=1317 Warm white=1054	09

Fountain LED Ring Light



HX170R-18T



Warning:
Must be installed in a place where contact water or under water to prevent being damaged from over heating.




DESCRIPTION

The underwater ring light series is the ultimate lighting solution for all animated fountains.

The ring lights HX170R sports a G 3/4" threaded connection at its centre where a nozzle can be directly attached. With a 8mm thick tempered glass cover and a IK rating of 9, the underwater ring light is extremely rugged.

All Ideal LED lights can be programmed to dim, colour- change and synchronize to create infinite combinations of kaleidoscopic displays.

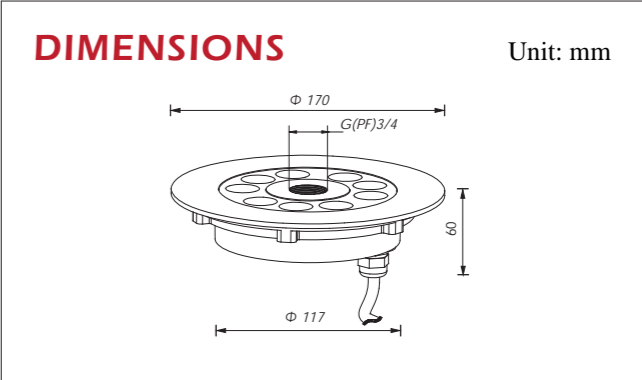

SPECIFICATIONS

- ◆ Housing: hard chrome plated molding shaped stainless steel SUS 316
- ◆ Front cover: hard chrome plated stainless steel SUS 316L
- ◆ Light Window: step tempered glass. T=8mm
- ◆ Gasket: silicone gasket
- ◆ PCB: excellent heat conductivity aluminum, coefficient of heat conductivity≥2.0w/mk
- ◆ Application environment: temperature of water between -20℃~40℃ less than 1 meter depth
- ◆ Cable gland: IP-68 PG-11 copper with nickel-coated
- ◆ Power cable: 3m STW 18AWG



Illuminance at a distance

Distance (m)	Center Beam (LUX)	Angle	Beam Width	
			(V)	(H)
2m	448.01 LUX		1.0m	0.9m
4m	112.00 LUX		1.9m	1.9m
6m	49.78 LUX		2.9m	2.8m
8m	28.00 LUX		3.9m	3.8m
10m	17.92 LUX		4.9m	4.7m
12m	12.44 LUX		5.8m	5.7m


PERFORMANCE

Type	Light source	The manufacturer selected lens degree(Θ 1/2)	Input voltage (v)	Typical operating current (mA)	Typical consumption (w)	Typical luminance (lm)	IK rate
HX170R-18T	9x2W RGB 3in1 Full color	30°	24V DC	R=300 G=375 B=375	25.2	580	09

Fountain LED Ring Light





HX170R-12OD

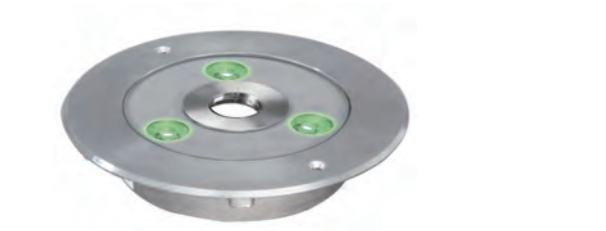

Warning:
Must be installed in a place where contact water or under water to prevent being damaged from over heating.


DESCRIPTION

The underwater ring light series is the ultimate lighting solution for all animated fountains.
The ring lights HX170R sports a G 3/4”threaded connection at its centre where a nozzle can be directly attached. With a 8mm thick tempered glass cover and a IK rating of 9, the underwater ring light is extremely rugged.
RDM function: DMX address to be read and written. Provide operating voltage, current and temperature of light. Provide basic data such as supplier information.

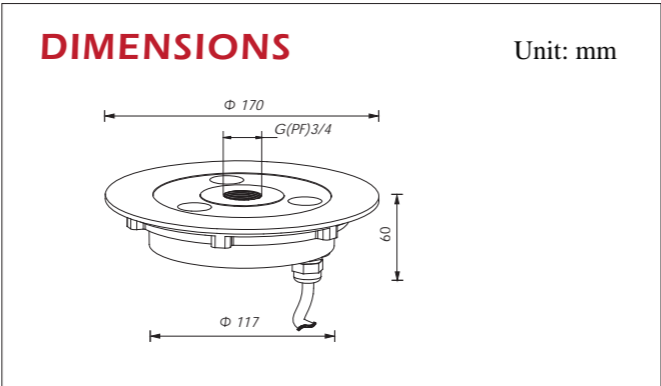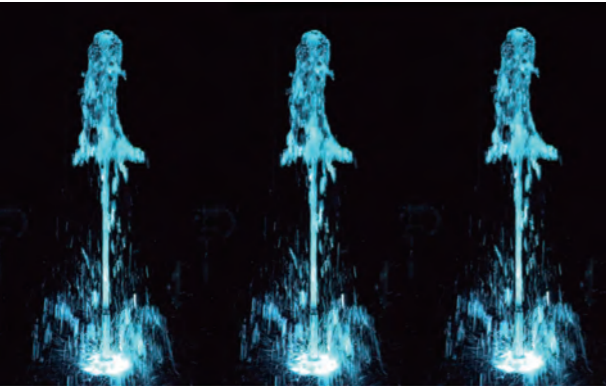

SPECIFICATIONS

- ◆ Housing: hard chrome plated molding shaped stainless steel SUS 316
- ◆ Front cover: hard chrome plated stainless steel SUS 316L
- ◆ Light Window: step tempered glass. T=8mm
- ◆ Gasket: silicone gasket
- ◆ PCB: Excellent heat conductivity aluminum, coefficient of heat conductivity≥2.0w/mk
- ◆ Application environment: Temperature of water between -20℃~40℃ less than 1 meter depth
- ◆ Cable gland: IP-68 PG-13.5 copper with nickel-coated
- ◆ Power cable: 3m STW 18AWG
- ◆ Signal type: DMX512/RDM signal



Illuminance at a distance

Distance (m)	Center Beam (LUX)	Angle	Beam Width	
			(V)	(H)
2m	522.00 LUX		1.0m	1.0m
4m	130.50 LUX		2.0m	2.0m
6m	58.00 LUX		3.0m	3.0m
8m	32.63 LUX		4.0m	4.0m
10m	20.88 LUX		5.0m	5.0m
12m	14.50 LUX		6.0m	6.1m

PERFORMANCE

Type	Light source	The manufacturer selected lens degree(θ 1/2)	Input voltage (v)	Typical operating current (mA)	Typical consumption (w)	Typical luminance (lm)	IK rate
HX170R-12OD	3x4W RGBW 4in1 Full color	30°	24V DC	520	12.5	438	09

Fountain LED Ring Light




HX182R-24



Warning:
Must be installed in a place where contact water or under water to prevent being damaged from over heating.

DESCRIPTION

The underwater ring light series is the ultimate lighting solution for all animated fountains.
The ring lights HX182R sports a G1 1/2”threaded connection at its centre where a nozzle can be directly attached. With a 10mm thick tempered glass cover and a IK rating of 9, the underwater ring light is extremely rugged. All Ideal LED lights can be programmed to dim, synchronize to create infinite combinations of kaleidoscopic displays.

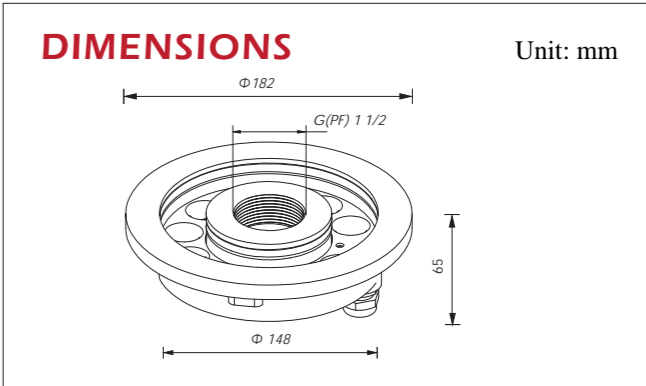

SPECIFICATIONS

- ◆ Housing: hard chrome plated molding shaped stainless steel SUS 316
- ◆ Front cover: hard chrome plated stainless steel SUS 316L
- ◆ Light Window: step tempered glass. T=10mm
- ◆ Gasket: silicone gasket
- ◆ PCB: excellent heat conductivity aluminum, coefficient of heat conductivity≥2.0w/mk
- ◆ Application environment: temperature of water between -20℃~40℃ less than 1 meter depth
- ◆ Cable gland: IP-68 PG-11 copper with nickel-coated
- ◆ Power cable: 3m STW 18AWG



Illuminance at a distance

Distance (m)	Center Beam (LUX)	Angle	Beam Width	
			(V)	(H)
2m	4657.90 LUX		0.5m	0.5m
4m	1164.47 LUX		1.1m	1.0m
6m	517.54 LUX		1.6m	1.6m
8m	291.12 LUX		2.2m	2.1m
10m	186.32 LUX		2.7m	2.6m
12m	129.39 LUX		3.3m	3.1m

PERFORMANCE

Type	Light source	The manufacturer selected lens degree(θ 1/2)	Input voltage (v)	Typical operating current (mA)	Typical consumption (w)	Typical luminance (lm)	IK rate
HX182R-24	12x2W	25°	24V DC	1200	28.8	Cool white=2067 Warm white=1610	09

Fountain LED Ring Light



HX182R-36T




Warning:
Must be installed in a place where contact water or under water to prevent being damaged from over heating.




DESCRIPTION

The underwater ring light series is the ultimate lighting solution for all animated fountains.
The ring lights HX182R sports a G1 1/2”threaded connection at its centre where a nozzle can be directly attached. With a 10mm thick tempered glass cover and a IK rating of 9, the underwater ring light is extremely rugged. All Ideal LED lights can be programmed to dim, colour- change and synchronize to create infinite combinations of kaleidoscopic displays.

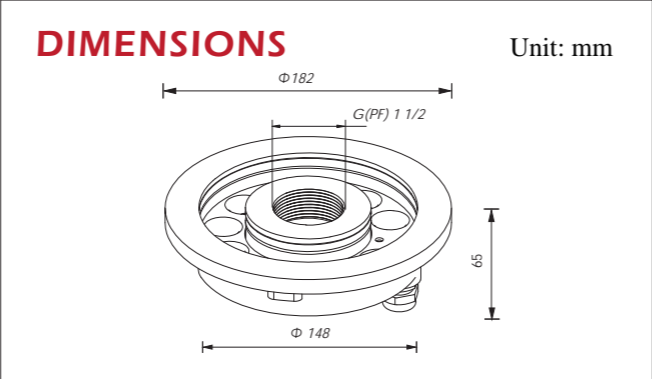

SPECIFICATIONS

- ◆ Housing: hard chrome plated molding shaped stainless steel SUS 316
- ◆ Front cover: hard chrome plated stainless steel SUS 316L
- ◆ Light Window: step tempered glass. T=10mm
- ◆ Gasket: silicone gasket
- ◆ PCB: excellent heat conductivity aluminum, coefficient of heat conductivity≥2.0w/mk
- ◆ Application environment: temperature of water between -20℃~40℃ less than 1 meter depth
- ◆ Cable gland: IP-68 PG-11 copper with nickel-coated
- ◆ Power cable: 3m STW 18AWG



Illuminance at a distance

Distance (m)	Center Beam (LUX)	Angle	Beam Width	
			(V)	(H)
2m	708.71 LUX		0.9m	1.0m
4m	177.18 LUX		1.9m	1.9m
6m	78.75 LUX		2.8m	2.9m
8m	44.29 LUX		3.8m	3.8m
10m	28.35 LUX		4.7m	4.8m
12m	19.69 LUX		5.7m	5.7m

PERFORMANCE

Type	Light source	The manufacturer selected lens degree(Θ1/2)	Input voltage (v)	Typical operating current (mA)	Typical consumption (w)	Typical luminance (lm)	IK rate
HX182R-36T	12x2W RGB 3in1 Full color	30°	24V DC	R=400 G=500 B=500	33.6	924	09

Fountain LED Ring Light



HX182R-24QD




Warning:
Must be installed in a place where contact water or under water to prevent being damaged from over heating.



DESCRIPTION

The underwater ring light series is the ultimate lighting solution for all animated fountains.
The ring lights HX182R sports a G1 1/2”threaded connection at its centre where a nozzle can be directly attached. With a 10mm thick tempered glass cover and a IK rating of 9, the underwater ring light is extremely rugged.
RDM function: DMX address to be read and written. Provide operating voltage, current and temperature of light. Provide basic data such as supplier information.

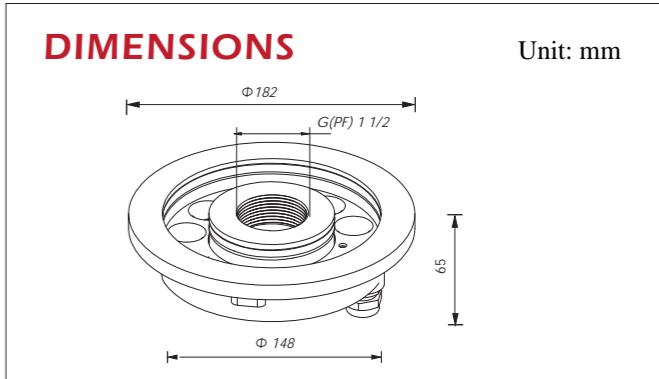

SPECIFICATIONS

- ◆ Housing: hard chrome plated molding shaped stainless steel SUS 316
- ◆ Front cover: hard chrome plated stainless steel SUS 316L
- ◆ Light Window: step tempered glass. T=10mm
- ◆ Gasket: EPDM gasket
- ◆ PCB: excellent heat conductivity aluminum, coefficient of heat conductivity≥2.0w/mk
- ◆ Application environment: temperature of water between -20℃~40℃ less than 1 meter depth
- ◆ Cable gland: IP-68 PG-13.5 copper with nickel-coated
- ◆ Power cable: 3m STW 18AWG
- ◆ Signal type: DMX512/RDM signal




Illuminance at a distance

Distance (m)	Center Beam (LUX)	Angle	Beam Width	
			(V)	(H)
2m	1124.77 LUX		0.8m	0.8m
4m	281.19 LUX		1.6m	1.7m
6m	124.97 LUX		2.4m	2.5m
8m	70.30 LUX		3.3m	3.3m
10m	44.99 LUX		4.1m	4.1m
12m	31.24 LUX		4.9m	5.0m

PERFORMANCE

Type	Light source	The manufacturer selected lens degree(Θ1/2)	Input voltage (v)	Typical operating current (mA)	Typical consumption (w)	Typical luminance (lm)	IK rate
HX182R-24QD	6x4W RGBW 4in1 Full color	30°	24V DC	1083	26	1208	09



Fountain LED Ring Light



HX200R-24




Warning:
Must be installed in a place where contact water or under water to prevent being damaged from over heating.




DESCRIPTION

The underwater ring light series is the ultimate lighting solution for all animated fountains.
The ring lights HX200R sports a G1 1/2”threaded connection at its centre where a nozzle can be directly attached. With a 10mm thick tempered glass cover and a IK rating of 9, the underwater ring light is extremely rugged.
All Ideal LED lights can be programmed to dim, synchronize to create infinite combinations of kaleidoscopic displays.

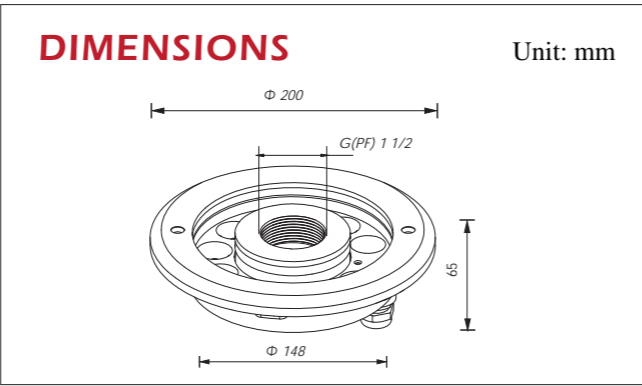

SPECIFICATIONS

- ◆ Housing: hard chrome plated molding shaped stainless steel SUS 316
- ◆ Front cover: hard chrome plated stainless steel SUS 316L
- ◆ Light Window: step tempered glass. T=10mm
- ◆ Gasket: silicone gasket
- ◆ PCB: excellent heat conductivity aluminum, coefficient of heat conductivity≥2.0w/mk
- ◆ Application environment: temperature of water between -20℃~40℃ less than 1 meter depth
- ◆ Cable gland: IP-68 PG-11 copper with nickel-coated
- ◆ Power cable: 3m STW 18AWG



Illuminance at a distance

Distance (m)	Center Beam (LUX)	Angle	Beam Width	
			(V)	(H)
2m	4657.90 LUX		0.5m	0.5m
4m	1164.47 LUX		1.1m	1.0m
6m	517.54 LUX		1.6m	1.6m
8m	291.12 LUX		2.2m	2.1m
10m	186.32 LUX		2.7m	2.6m
12m	129.39 LUX		3.3m	3.1m

PERFORMANCE

Type	Light source	The manufacturer selected lens degree(Θ 1/2)	Input voltage (v)	Typical operating current (mA)	Typical consumption (w)	Typical luminance (lm)	IK rate
HX200R-24	12x2W	25°	24V DC	1200	28.8	Cool white=2067 Warm white=1610	09

Fountain LED ring Light



HX200R-36T





Warning:
Must be installed in a place where contact water or under water to prevent being damaged from over heating.



SPECIFICATIONS

- ◆ Housing: hard chrome plated molding shaped stainless steel SUS 316
- ◆ Front cover: hard chrome plated stainless steel SUS 316L
- ◆ Light Window: step tempered glass. T=10mm
- ◆ Gasket: silicone gasket
- ◆ PCB: excellent heat conductivity aluminum, coefficient of heat conductivity≥2.0w/mk
- ◆ Application environment: temperature of water between -20℃~40℃ less than 1 meter depth
- ◆ Cable gland: IP-68 PG-11 copper with nickel-coated
- ◆ Power cable: 3m STW 18AWG

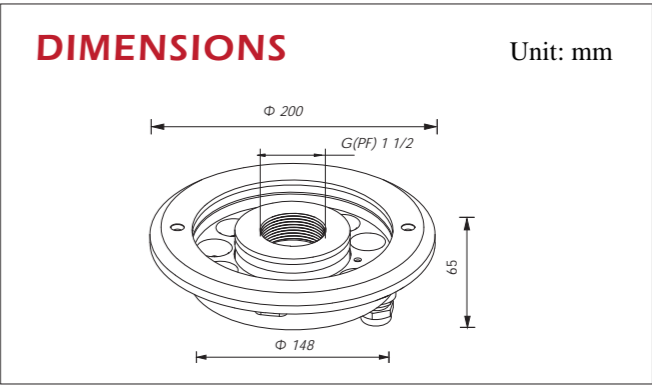


Illuminance at a distance

Distance (m)	Center Beam (LUX)	Angle	Beam Width	
			(V)	(H)
2m	708.71 LUX		0.9m	1.0m
4m	177.18 LUX		1.9m	1.9m
6m	89.59 LUX		2.8m	2.9m
8m	51.75 LUX		3.8m	3.8m
10m	32.61 LUX		4.7m	4.8m
12m	20.38 LUX		5.7m	5.7m

PERFORMANCE

Type	Light source	The manufacturer selected lens degree(Θ 1/2)	Input voltage (v)	Typical operating current (mA)	Typical consumption (w)	Typical luminance (lm)	IK rate
HX200R-36T	12x2W RGB 3in1 Full color	30°	24V DC	R=400 G=500 B=500	33.6	924	09



Fountain LED ring Light



HX200R-24QD



Warning:
Must be installed in a place where contact water or under water to prevent being damaged from over heating.




DESCRIPTION

The underwater ring light series is the ultimate lighting solution for all animated fountains.


The ring lights HX200R sports a G1 1/2" threaded connection at its centre where a nozzle can be directly attached. With a 10mm thick tempered glass cover and a IK rating of 9, the underwater ring light is extremely rugged.

RDM function: DMX address to be read and written. Provide operating voltage, current and temperature of light. Provide basic data such as supplier information.

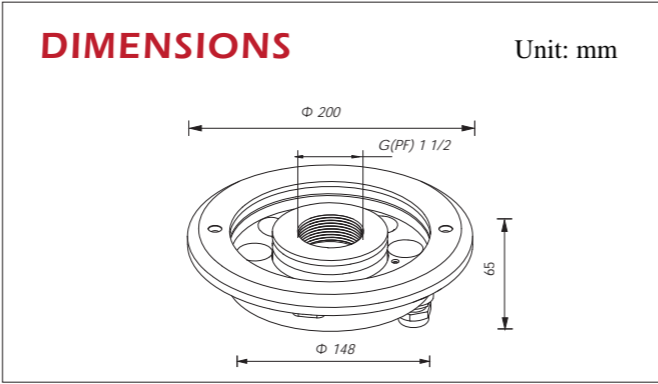

SPECIFICATIONS

- ◆ Housing: hard chrome plated molding shaped stainless steel SUS 316
- ◆ Front cover: hard chrome plated stainless steel SUS 316L
- ◆ Light Window: step tempered glass. T=10mm
- ◆ Gasket: EPDM gasket
- ◆ PCB: excellent heat conductivity aluminum, coefficient of heat conductivity≥2.0w/mk
- ◆ Application environment: temperature of water between -20℃~40℃ less than 1 meter depth
- ◆ Cable gland: IP-68 PG-13.5 copper with nickel-coated
- ◆ Power cable: 3m STW 18AWG
- ◆ Signal type: DMX512/RDM signal



Illuminance at a distance

Distance (m)	Center Beam (LUX)	Angle	Beam Width	
			(V)	(H)
2m	1124.77 LUX		0.8m	0.8m
4m	281.19 LUX		1.6m	1.7m
6m	124.97 LUX		2.4m	2.5m
8m	70.30 LUX		3.3m	3.3m
10m	44.99 LUX		4.1m	4.1m
12m	31.24 LUX		4.9m	5.0m

PERFORMANCE

Type	Light source	The manufacturer selected lens degree(θ1/2)	Input voltage (v)	Typical operating current (mA)	Typical consumption (w)	Typical luminance (lm)	IK rate
HX200R-24QD	6x4W RGBW 4in1 Full color	30°	24V DC	1083	26	1208	09

Underwater LED Spot Light



HX57T-6/HX57T-4QD




Warning:
Must be installed in a place where contact water or under water to prevent being damaged from over heating.



DESCRIPTION

The underwater spot light series is your solution to tight spaces. Whether installed free-standing or standing, the HX57T provides sufficient illumination for most residential and indoor water features.

This compact fixture allows it to be easily hidden from sight or even integrated with the hardscape to achieve better ambience. All Ideal LED lights can be programmed to dim, colour- change and synchronize to create infinite combinations of kaleidoscopic displays.

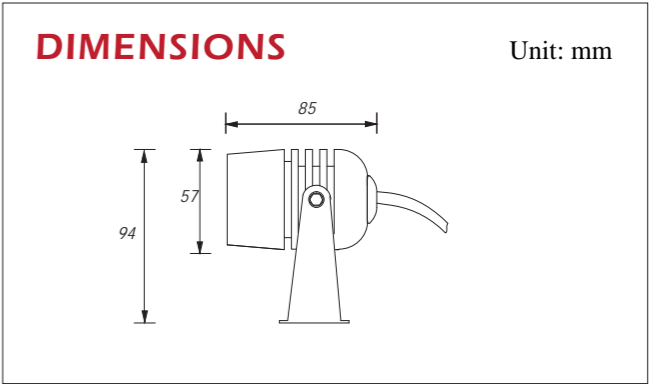

SPECIFICATIONS

- ◆ Front cover : hard chrome plated stainless steel SUS 316
- ◆ Light Window: high-strength ultra-white tempered glass
- ◆ Gasket: silicone gasket
- ◆ Application environment: temperature of water between -20℃~50℃
- ◆ Power cable: 0.5m RVV 2x1mm²/ 5x1mm²
- ◆ Signal type: DMX512 (HX57T-4QD)

Illuminance at a distance (HX57T-6,3000K)

Distance (m)	Center Beam (lux)	Angle (15°)	Beam Width	
			(V)	(H)
2m	1334 lux		0.45m	0.45m
4m	336 lux		0.98m	0.98m
6m	148 lux		1.35m	1.35m
8m	83 lux		1.85m	1.85m

Illuminance at a distance (HX57T-6,3000K)

Distance (m)	Center Beam (lux)	Angle (24°)	Beam Width	
			(V)	(H)
2m	777 lux		0.77m	0.77m
4m	194 lux		1.41m	1.41m
6m	86 lux		2.15m	2.15m
8m	49 lux		2.85m	2.85m

PERFORMANCE

Type	Light source	Color	The manufacturer selected lens degree (θ1/2)	Input voltage (v)	Weight
HX57T-6	1x6W	3000K/6000K	15°/24°/36°/50°	24V DC	0.7 kg
HX57T-4QD	1x4W	RGBW	15°/24°/36°/50°	24V DC	0.7 kg

Underwater LED Spot Light



HX60TH-3



Warning:
Must be installed in a place where contact water or under water to prevent being damaged from over heating.




DESCRIPTION

The underwater spot light series is your solution to tight spaces. Whether installed free-standing or standing, the HX60TH provides sufficient illumination for most residential and indoor water features.


This compact fixture allows it to be easily hidden from sight or even integrated with the hardscape to achieve better ambience.

All Ideal LED lights can be programmed to dim, synchronize to create infinite combinations of kaleidoscopic displays.

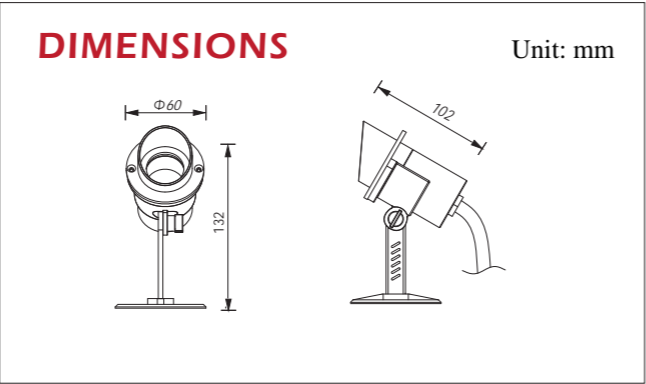

SPECIFICATIONS

- ◆ Front cover & Housing: hard chrome plated molding shaped stainless steel SUS 316
- ◆ Light Window: step tempered glass. T=7mm
- ◆ Gasket: EPDM gasket
- ◆ PCB: excellent heat conductivity aluminum, coefficient of heat conductivity≥2.0w/mk
- ◆ Application environment: temperature of water between -20℃~40℃ less than 1 meter depth
- ◆ Cable gland: IP-68 M16a copper with nickel-coated
- ◆ Power cable: 3m STW 18AWG



Illuminance at a distance

Distance (m)	Center Beam (LUX)	Angle	Beam Width	
			(V)	(H)
2m	142.38 LUX		1.0m	1.0m
4m	35.60 LUX		1.9m	1.9m
6m	15.82 LUX		2.9m	2.9m
8m	8.90 LUX		3.8m	3.8m
10m	5.70 LUX		4.8m	4.8m
12m	3.96 LUX		5.8m	5.7m

PERFORMANCE

Type	Light source	The manufacturer selected lens degree(θ1/2)	Input voltage (v)	Typical operating current (mA)	Typical consumption (w)	Typical luminance (lm)	IK rate
HX60TH-3	1 x3W	30°	24V DC	110	2.6	Cool white= 174 Warm white= 139	06

Underwater LED Spot Light



HX60TH-3T



Warning:
Must be installed in a place where contact water or under water to prevent being damaged from over heating.




DESCRIPTION

The underwater spot light series is your solution to tight spaces. Whether installed free-standing or standing, the HX60TH provides sufficient illumination for most residential and indoor water features.


This compact fixture allows it to be easily hidden from sight or even integrated with the hardscape to achieve better ambience.

All Ideal LED lights can be programmed to dim, colour- change and synchronize to create infinite combinations of kaleidoscopic displays.

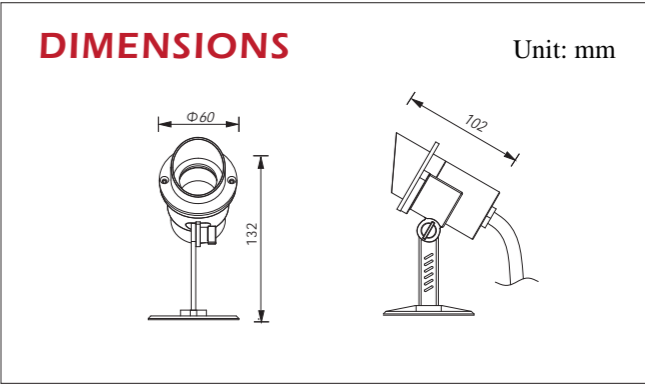

SPECIFICATIONS

- ◆ Front cover & Housing: hard chrome plated molding shaped stainless steel SUS 316
- ◆ Light Window: step tempered glass. T=7mm
- ◆ Gasket: EPDM gasket
- ◆ PCB: excellent heat conductivity aluminum, coefficient of heat conductivity≥2.0w/mk
- ◆ Application environment: temperature of water between -20℃~40℃ less than 1 meter depth
- ◆ Cable gland: IP-68 M16a copper with nickel-coated
- ◆ Power cable: 3m STW 18AWG




Illuminance at a distance

Distance (m)	Center Beam (LUX)	Angle	Beam Width	
			(V)	(H)
2m	59.08 LUX		1.0m	1.0m
4m	14.77 LUX		2.1m	2.0m
6m	5.56 LUX		3.1m	3.0m
8m	3.69 LUX		4.2m	4.0m
10m	2.36 LUX		5.2m	5.0m
12m	1.64 LUX		6.2m	6.0m

PERFORMANCE

Type	Light source	The manufacturer selected lens degree(θ1/2)	Input voltage (v)	Typical operating current (mA)	Typical consumption (w)	Typical luminance (lm)	IK rate
HX60TH-3T	1x3W RGB 3in1 Full color	30°	24V DC	R= 48 G= 62 B= 62	4.1	103	06




Underwater LED Spot Light



HX69T-3




Warning:
Must be installed in a place where contact water or under water to prevent being damaged from over heating.

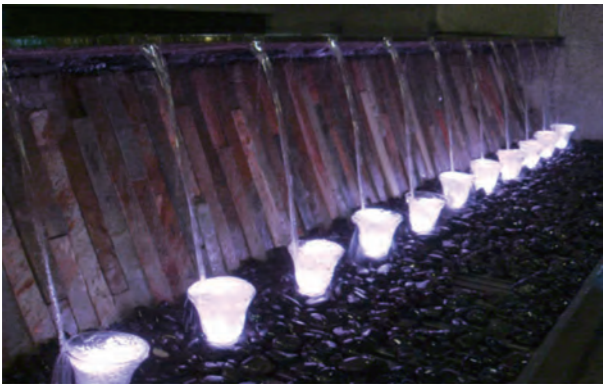

DESCRIPTION

The underwater spot light series is your solution to tight spaces. Whether installed free-standing or standing, the HX69T provides sufficient illumination for most residential and indoor water features.

This compact fixture allows it to be easily hidden from sight or even integrated with the hardscape to achieve better ambience. All Ideal LED lights can be programmed to dim, colour- change and synchronize to create infinite combinations of kaleidoscopic displays.

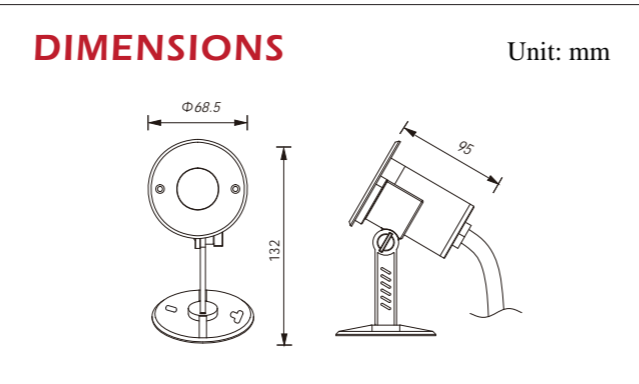

SPECIFICATIONS

- ◆ Front cover & Housing: hard chrome plated molding shaped stainless steel SUS 316
- ◆ Light Window: step tempered glass. T=7mm
- ◆ Gasket: EPDM gasket
- ◆ PCB: excellent heat conductivity aluminum, coefficient of heat conductivity≥2.0w/mk
- ◆ Application environment: temperature of water between -20℃~40℃ less than 1 meter depth
- ◆ Cable gland: IP-68 M16a copper with nickel-coated
- ◆ Power cable: 3m STW 18AWG



Illuminance at a distance

Distance (m)	Center Beam (LUX)	Angle	Beam Width	
			(V)	(H)
2m	132.37 LUX		1.1m	1.1m
4m	33.09 LUX		2.2m	2.1m
6m	14.71 LUX		3.3m	3.2m
8m	8.27 LUX		4.4m	4.3m
10m	5.29 LUX		5.5m	5.3m
12m	3.68 LUX		6.5m	6.4m

PERFORMANCE

Type	Light source	The manufacturer selected lens degree(θ1/2)	Input voltage (V)	Typical operating current (mA)	Typical consumption (w)	Typical luminance (lm)	IK rate
HX69T-3	1x3W	30°	24V DC	110	2.6	Cool white=174 Warm white=139	06

Underwater LED Spot Light



HX69T-3T




Warning:
Must be installed in a place where contact water or under water to prevent being damaged from over heating.



DESCRIPTION

The underwater spot light series is your solution to tight spaces. Whether installed free-standing or standing, the HX69T provides sufficient illumination for most residential and indoor water features.

This compact fixture allows it to be easily hidden from sight or even integrated with the hardscape to achieve better ambience. All Ideal LED lights can be programmed to dim, colour- change and synchronize to create infinite combinations of kaleidoscopic displays.

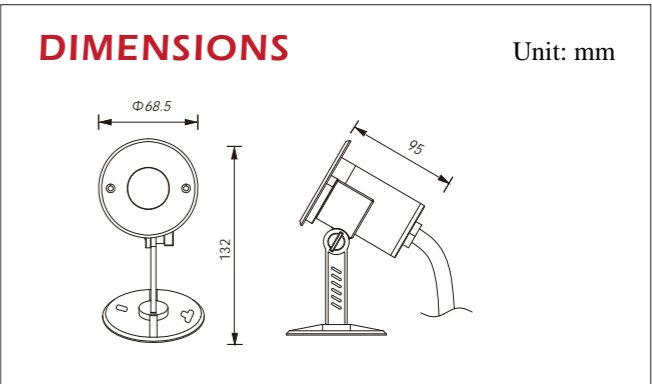

SPECIFICATIONS

- ◆ Front cover & Housing: hard chrome plated molding shaped stainless steel SUS 316
- ◆ Light Window: step tempered glass. T=7mm
- ◆ Gasket: EPDM gasket
- ◆ PCB: excellent heat conductivity aluminum, coefficient of heat conductivity≥2.0w/mk
- ◆ Application environment: temperature of water between -20℃~40℃ less than 1 meter depth
- ◆ Cable gland: IP-68 M16a copper with nickel-coated
- ◆ Power cable: 3m STW 18AWG




Illuminance at a distance

Distance (m)	Center Beam (LUX)	Angle	Beam Width	
			(V)	(H)
2m	82.44LUX		0.9m	0.9m
4m	20.61 LUX		1.8m	1.8m
6m	9.16 LUX		2.8m	2.7m
8m	5.15 LUX		3.7m	3.6m
10m	3.30 LUX		4.6m	4.6m
12m	2.29 LUX		5.5m	5.5m

PERFORMANCE

Type	Light source	The manufacturer selected lens degree(θ1/2)	Input voltage (V)	Typical operating current (mA)	Typical consumption (w)	Typical luminance (lm)	IK rate
HX69T-3T	1x3W RGB 3in1 Full color	30°	24V DC	R=48 G=62 B=62	4.1	103	06



Underwater LED Spot Light



HX62T-4



Warning:
Must be installed in a place where contact water or under water to prevent being damaged from over heating.



SPECIFICATIONS

- ◆ Front cover & Housing: hard chrome plated molding shaped stainless steel SUS 316
- ◆ Light Window: high-strength ultra-white tempered glass
- ◆ Application environment: temperature of water between -20℃~50℃
- ◆ Power cable: 0.5m RVV 2x1mm²


PERFORMANCE

Type	Light source	Color	The manufacturer selected lens degree (Θ1/2)	Input voltage (V)	Weight
HX62T-4	1x4W	3000K/6000K	15°/25°/40°	24V DC	0.25 kg

DESCRIPTION

The underwater spot light series is your solution to tight spaces. Whether installed free-standing or standing, the HX62T provides sufficient illumination for most residential and indoor water features.

This compact fixture allows it to be easily hidden from sight or even integrated with the hardscape to achieve better ambience. All Ideal LED lights can be programmed to dim, synchronize to create infinite combinations of kaleidoscopic displays.

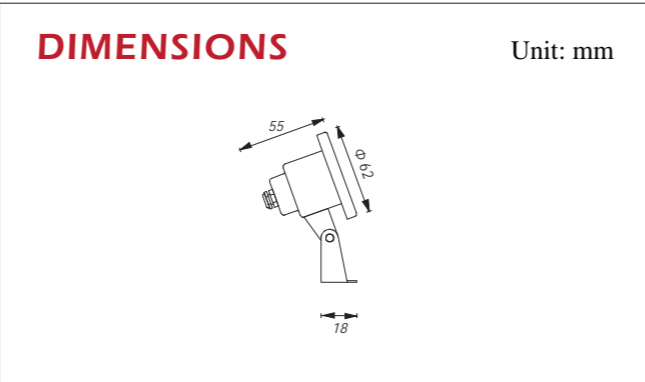

Illuminance at a distance (HX62T-4,3000K)

Distance (m)	Center Beam (lux)	Angle (15°)	Beam Width	
			(V)	(H)
2m	605 lux		0.43m	0.43m
4m	151 lux		0.86m	0.86m
6m	67 lux		1.30m	1.30m
8m	38 lux		1.73m	1.73m

Illuminance at a distance (HX62T-4,3000K)

Distance (m)	Center Beam (lux)	Angle (25°)	Beam Width	
			(V)	(H)
2m	265 lux		0.75m	0.75m
4m	66 lux		1.50m	1.50m
6m	29 lux		2.26m	2.26m
8m	16 lux		3.01m	3.01m

Underwater LED Spot Light



HX86T-4/HX86T-4QD



Warning:
Must be installed in a place where contact water or under water to prevent being damaged from over heating.



SPECIFICATIONS

- ◆ Front cover : hard chrome plated molding shaped stainless steel SUS 316
- ◆ Light Window:high-strength ultra-white tempered glass
- ◆ Gasket: silicone gasket
- ◆ Application environment: temperature of water between -20℃~50℃
- ◆ Power cable: 0.5m RVV 2x1mm²/ 5x1mm²
- ◆ Signal type: DMX512 (HX86T-4QD)


PERFORMANCE

Type	Light source	Color	The manufacturer selected lens degree (Θ1/2)	Input voltage (V)	Weight
HX86T-4	1x4W	3000K/6000K	10°/15°/25°/45°	24V DC	1.5 kg
HX86T-4QD	1x4W	RGBW	10°/15°/25°/45°	24V DC	1.5 kg

DESCRIPTION

The underwater spot light series is your solution to tight spaces. Whether installed free-standing or standing, the HX86T provides sufficient illumination for most residential and indoor water features.

This compact fixture allows it to be easily hidden from sight or even integrated with the hardscape to achieve better ambience. All Ideal LED lights can be programmed to dim, colour- change and synchronize to create infinite combinations of kaleidoscopic displays.

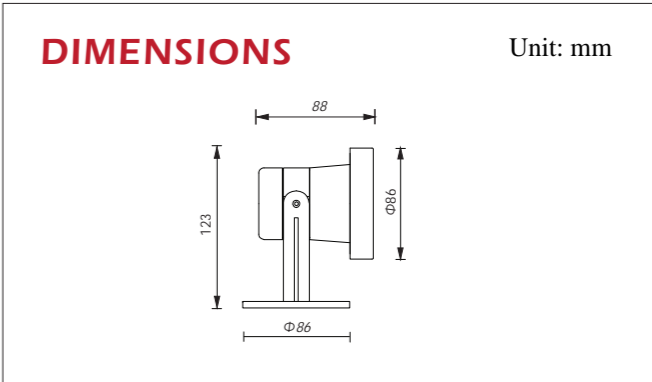


Illuminance at a distance (HX86T-4,3000K)

Distance (m)	Center Beam (lux)	Angle (15°)	Beam Width	
			(V)	(H)
2m	827 lux		0.52m	0.52m
4m	206 lux		1.04m	1.04m
6m	92 lux		1.56m	1.56m
8m	51 lux		2.09m	2.09m

Illuminance at a distance (HX86T-4,3000K)

Distance (m)	Center Beam (lux)	Angle (25°)	Beam Width	
			(V)	(H)
2m	292 lux		0.88m	0.88m
4m	73 lux		1.76m	1.76m
6m	32 lux		2.64m	2.64m
8m	18 lux		3.53m	3.53m



Underwater LED Spot Light



HX95T-6




Warning:
Must be installed in a place where contact water or under water to prevent being damaged from over heating.



DESCRIPTION

The underwater spot light series offers unparallel flexibility to match your creativity.
The sturdy tripod design does not topple easily even when water movement is very agitated.
If preferred, the fixture can also be fixed in place using just the mounting bracket.
All Ideal LED lights can be programmed to dim, synchronize to create infinite combinations of kaleidoscopic displays.

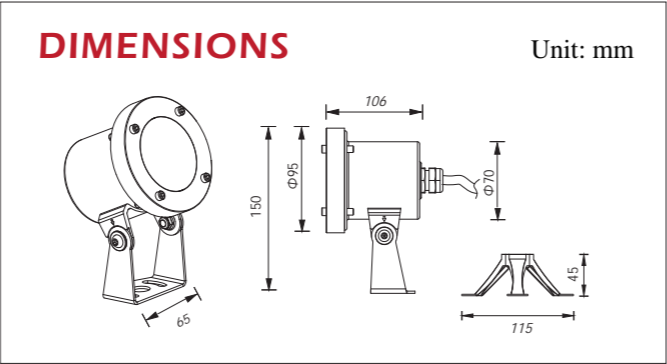

SPECIFICATIONS

- ◆ Front cover & Housing: hard chrome plated molding shaped stainless steel SUS 316L
- ◆ Light Window: PMMA 8mm
- ◆ Gasket: silicone gasket
- ◆ PCB: excellent heat conductivity aluminum, coefficient of heat conductivity≥2.0w/mk
- ◆ Application environment: temperature of water between -20℃~40℃ less than 1 meter depth
- ◆ Cable gland: IP-68 PG-11 copper with nickel-oated
- ◆ Power cable: 3m STW 18AWG

PERFORMANCE

Type	Light source	The manufacturer selected lens degree(θ1/2)	Input voltage (v)	Typical operating current (mA)	Typical consumption (w)	Typical luminance (lm)	IK rate
HX95T-6	3x2W	30°	24V DC	320	7.7	Cool white=760 Warm white=674	10

Underwater LED Spot Light



HX95T-8




Warning:
Must be installed in a place where contact water or under water to prevent being damaged from over heating.



DESCRIPTION

The underwater spot light series offers unparallel flexibility to match your creativity.
The sturdy tripod design does not topple easily even when water movement is very agitated.
If preferred, the fixture can also be fixed in place using just the mounting bracket.
All Ideal LED lights can be programmed to dim, colour- change and synchronize to create infinite combinations of kaleidoscopic displays.

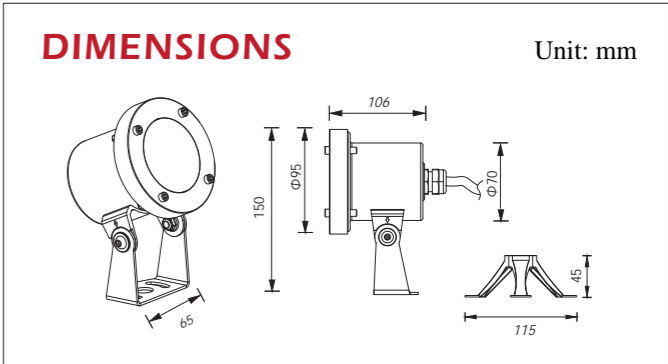


SPECIFICATIONS

- ◆ Front cover & Housing: hard chrome plated molding shaped stainless steel SUS 316L
- ◆ Light Window: PMMA 8mm
- ◆ Gasket: silicone gasket
- ◆ PCB: excellent heat conductivity aluminum, coefficient of heat conductivity≥2.0w/mk
- ◆ Application environment: temperature of water between -20℃~40℃ less than 1 meter depth
- ◆ Cable gland: IP-68 PG-11 copper with nickel-oated
- ◆ Power cable: 3m STW 18AWG

PERFORMANCE

Type	Light source	The manufacturer selected lens degree(θ1/2)	Input voltage (v)	Typical operating current (mA)	Typical consumption (w)	Typical luminance (lm)	IK rate
HX95T-8	1×8W	25°	24V DC	340	8.1	Cool white=674 Warm white=625	10



Underwater LED Spot Light



HX95T-9T




Warning:
Must be installed in a place where contact water or under water to prevent being damaged from over heating.



DESCRIPTION

The underwater spot light series offers unparallel flexibility to match your creativity.
The sturdy tripod design does not topple easily even when water movement is very agitated.
If preferred, the fixture can also be fixed in place using just the mounting bracket.
All Ideal LED lights can be programmed to dim, colour- change and synchronize to create infinite combinations of kaleidoscopic displays.

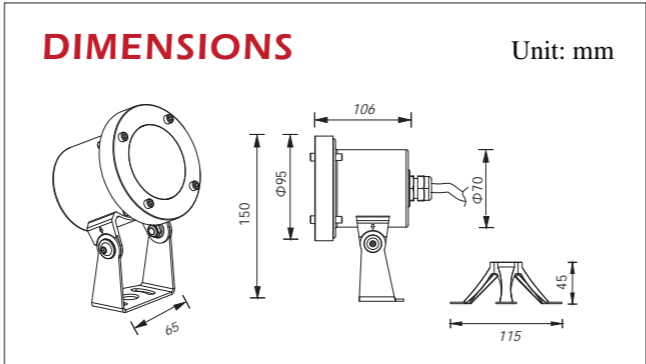

SPECIFICATIONS

- ◆ Front cover & Housing: hard chrome plated molding shaped stainless steel SUS 316L
- ◆ Light Window: PMMA 8mm
- ◆ Gasket: EPDM gasket
- ◆ PCB: excellent heat conductivity aluminum, coefficient of heat conductivity≥2.0w/mk
- ◆ Application environment: temperature of water between -20℃~40℃ less than 1 meter depth
- ◆ Cable gland: IP-68 PG-11 copper with nickel-oated
- ◆ Power cable: 3m STW 18AWG



Illuminance at a distance

Distance (m)	Center Beam (LUX)	Angle	Beam Width	
			(V)	(H)
2m	149.35 LUX		1.0m	1.0m
4m	37.34 LUX		1.9m	1.9m
6m	16.59 LUX		2.9m	2.9m
8m	9.33 LUX		3.9m	3.8m
10m	5.97 LUX		4.8m	4.8m
12m	4.15 LUX		5.8m	5.7m

PERFORMANCE

Type	Light source	The manufacturer selected lens degree(Θ1/2)	Input voltage (v)	Typical operating current (mA)	Typical consumption (w)	Typical luminance (lm)	IK rate
HX95T-9T	3x3W RGB 3in1 Full color	30°	24V DC	400	9.6	239	10

Underwater LED Spot Light



HX95T-9QD




Warning:
Must be installed in a place where contact water or under water to prevent being damaged from over heating.




DESCRIPTION

The underwater spot light series offers unparallel flexibility to match your creativity.
The sturdy tripod design does not topple easily even when water movement is very agitated.
If preferred, the fixture can also be fixed in place using just the mounting bracket.
RDM function: DMX address to be read and written. Provide operating voltage, current and temperature of light. Provide basic data such as supplier information.

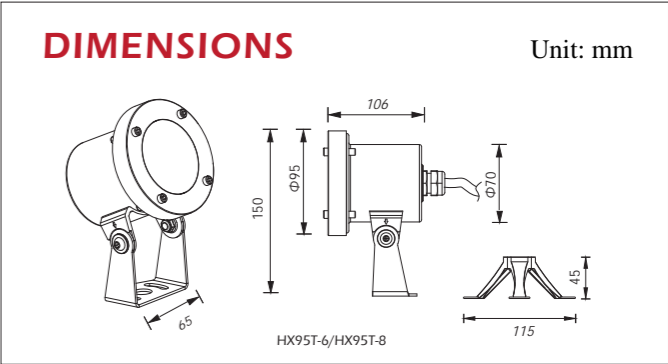

SPECIFICATIONS

- ◆ Front cover & Housing: hard chrome plated molding shaped stainless steel SUS 316L
- ◆ Light Window: PMMA 8mm
- ◆ Gasket: EPDM gasket
- ◆ PCB: excellent heat conductivity aluminum, coefficient of heat conductivity≥2.0w/mk
- ◆ LED Driver: Constant Voltage Input, Constant Current Output
- ◆ Application environment: temperature of water between -20℃~40℃ less than 1 meter depth
- ◆ Built-in Overheat Sensor System: Automatic Shutdown at 75℃
- ◆ Cable gland: IP-68 PG-11 copper with nickel- coated
- ◆ Power cable: H05RR-F 3m
- ◆ Signal type: DMX512/RDM signal



Illuminance at a distance

Distance (m)	Center Beam (LUX)	Angle	Beam Width	
			(V)	(H)
2m	149.35 LUX		1.0m	1.0m
4m	37.34 LUX		1.9m	1.9m
6m	16.59 LUX		2.9m	2.9m
8m	9.33 LUX		3.9m	3.8m
10m	5.97 LUX		4.8m	4.8m
12m	4.15 LUX		5.8m	5.7m

PERFORMANCE

Type	Light source	The manufacturer selected lens degree(Θ1/2)	Input voltage (v)	Typical operating current (mA)	Typical consumption (w)	Typical luminance (lm)	IK rate
HX95T-9QD	3x3W RGBW 4in1	30°	24V DC	437	10.5	536	10

Underwater LED Spot Light



HX127T-18




Warning:
Must be installed in a place where contact water or under water to prevent being damaged from over heating.




DESCRIPTION

The underwater spot light series offers unparallel flexibility to match your creativity.
The sturdy tripod design does not topple easily even when water movement is very agitated.
If preferred, the fixture can also be fixed in place using just the mounting bracket.
All Ideal LED lights can be programmed to dim, synchronize to create infinite combinations of kaleidoscopic displays.

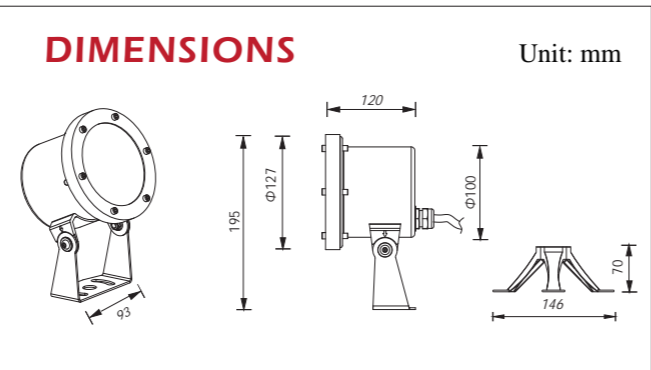

SPECIFICATIONS

- ◆ Front cover & Housing: hard chrome plated molding shaped stainless steel SUS 316L
- ◆ Light Window: PMMA 8mm
- ◆ Gasket: silicone gasket
- ◆ PCB: excellent heat conductivity aluminum, coefficient of heat conductivity≥2.0w/mk
- ◆ Application environment: temperature of water between -20℃~40℃ less than 1 meter depth
- ◆ Cable gland: IP-68 PG-11 copper with nickel-coated
- ◆ Power cable: 3m STW 18AWG



Illuminance at a distance

Distance (m)	Center Beam (LUX)	Angle	Beam Width	
			(V)	(H)
2m	1110.46 LUX		1.0m	1.0m
4m	277.61 LUX		2.0m	1.9m
6m	123.38 LUX		2.9m	2.9m
8m	69.40 LUX		3.9m	3.8m
10m	44.42 LUX		4.9m	4.8m
12m	30.85 LUX		5.9m	5.7m

PERFORMANCE

Type	Light source	The manufacturer selected lens degree(Θ1/2)	Input voltage (v)	Typical operating current (mA)	Typical consumption (w)	Typical luminance (lm)	IK rate
HX127T-18	6x3W	30°	24V DC	900	21.5	Cool white=1700 Warm white=1503	10

Underwater LED Spot Light



HX127T-16




Warning:
Must be installed in a place where contact water or under water to prevent being damaged from over heating.



DESCRIPTION

The underwater spot light series offers unparallel flexibility to match your creativity.
The sturdy tripod design does not topple easily even when water movement is very agitated.
If preferred, the fixture can also be fixed in place using just the mounting bracket.
All Ideal LED lights can be programmed to dim, synchronize to create infinite combinations of kaleidoscopic displays.

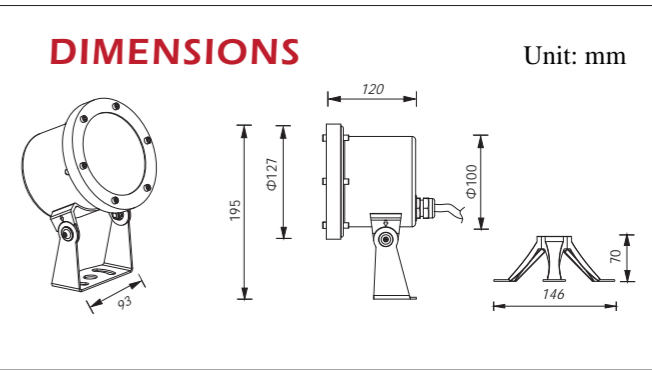

SPECIFICATIONS

- ◆ Front cover & Housing: hard chrome plated molding shaped stainless steel SUS 316L
- ◆ Light Window: PMMA 8mm
- ◆ Gasket: silicone gasket
- ◆ PCB: excellent heat conductivity aluminum, coefficient of heat conductivity≥2.0w/mk
- ◆ Application environment: temperature of water between -20℃~40℃ less than 1 meter depth
- ◆ Cable gland: IP-68 PG-11 copper with nickel-coated
- ◆ Power cable: 3m STW 18AWG



Illuminance at a distance

Distance (m)	Center Beam (LUX)	Angle	Beam Width	
			(V)	(H)
2m	1245.82 LUX		0.8m	0.8m
4m	311.45 LUX		1.7m	1.6m
6m	138.42 LUX		2.5m	2.5m
8m	77.86 LUX		3.3m	3.3m
10m	49.83 LUX		4.2m	4.1m
12m	34.61 LUX		5.0m	4.9m

PERFORMANCE

Type	Light source	The manufacturer selected lens degree(Θ1/2)	Input voltage (v)	Typical operating current (mA)	Typical consumption (w)	Typical luminance (lm)	IK rate
HX127T-16	1×16W	22°	24V DC	700	17.0	Cool white=1344 Warm white=1183	10

Underwater LED Spot Light



HX127T-18T




Warning:
Must be installed in a place where contact water or under water to prevent being damaged from over heating.



DESCRIPTION

The underwater spot light series offers unparallel flexibility to match your creativity.
The sturdy tripod design does not topple easily even when water movement is very agitated.
If preferred, the fixture can also be fixed in place using just the mounting bracket.
All Ideal LED lights can be programmed to dim, colour-change and synchronize to create infinite combinations of kaleidoscopic displays.

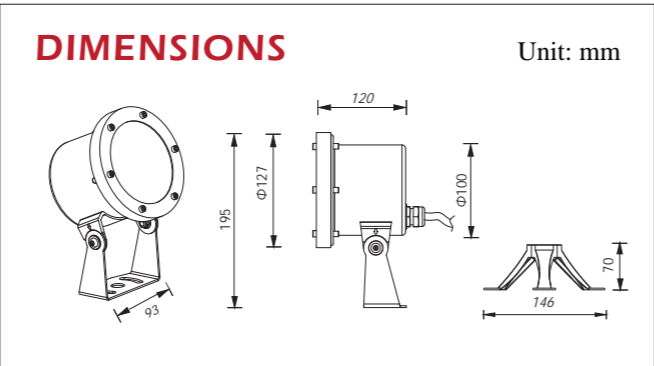

SPECIFICATIONS

- ◆ Front cover & Housing: hard chrome plated molding shaped stainless steel SUS 316L
- ◆ Light Window: PMMA 8mm
- ◆ Gasket: EPDM gasket
- ◆ PCB: excellent heat conductivity aluminum, coefficient of heat conductivity $\geq 2.0\text{w/mk}$
- ◆ Application environment: temperature of water between -20°C ~ 40°C less than 1 meter depth
- ◆ Cable gland: IP-68 PG-11 copper with nickel-coated
- ◆ Power cable: 3m STW 18AWG



Illuminance at a distance

Distance (m)	Center Beam (LUX)	Angle	Beam Width	
			(V)	(H)
2m	368.00 LUX		0.9m	0.9m
4m	92.00 LUX		1.9m	1.9m
6m	40.89 LUX		2.8m	2.8m
8m	23.00 LUX		3.8m	3.7m
10m	14.72 LUX		4.7m	4.7m
12m	10.22 LUX		5.7m	5.6m

PERFORMANCE

Type	Light source	The manufacturer selected lens degree(θ1/2)	Input voltage (v)	Typical operating current (mA)	Typical consumption (w)	Typical luminance (lm)	IK rate
HX127T-18T	6x3W RGB 3in1	30°	24V DC	1000	24	528	10

Underwater LED Spot Light



HX127T-18QD




Warning:
Must be installed in a place where contact water or under water to prevent being damaged from over heating.



DESCRIPTION

The underwater spot light series offers unparallel flexibility to match your creativity.
The sturdy tripod design does not topple easily even when water movement is very agitated.
If preferred, the fixture can also be fixed in place using just the mounting bracket.
RDM function: DMX address to be read and written. Provide operating voltage, current and temperature of light. Provide basic data such as supplier information.

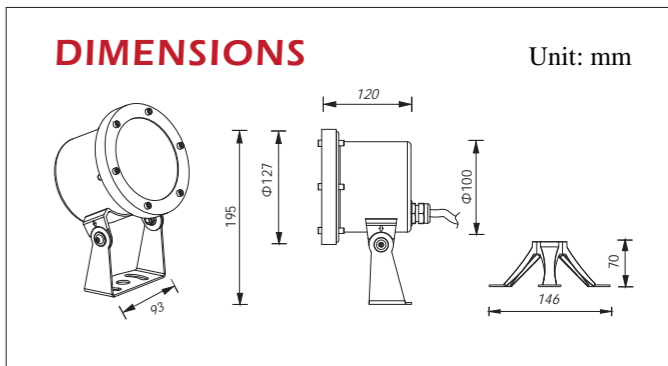

SPECIFICATIONS

- ◆ Front cover & Housing: hard chrome plated molding shaped stainless steel SUS 316L
- ◆ Light Window: PMMA 8mm
- ◆ Gasket: EPDM gasket
- ◆ PCB: excellent heat conductivity aluminum, coefficient of heat conductivity $\geq 2.0\text{w/mk}$
- ◆ LED Driver: Constant Voltage Input, Constant Current Output
- ◆ Application environment: temperature of water between -20°C ~ 40°C less than 1 meter depth
- ◆ Built-in Overheat Sensor System: Automatic Shutdown at 75°C
- ◆ Cable gland: IP-68 PG-11 copper with nickel-coated
- ◆ Power cable: H05RR-F 3m
- ◆ Signal type: DMX512/RDM signal



Illuminance at a distance

Distance (m)	Center Beam (LUX)	Angle	Beam Width	
			(V)	(H)
2m	368.00 LUX		0.9m	0.9m
4m	92.00 LUX		1.9m	1.9m
6m	40.89 LUX		2.8m	2.8m
8m	23.00 LUX		3.8m	3.7m
10m	14.72 LUX		4.7m	4.7m
12m	10.22 LUX		5.7m	5.6m

PERFORMANCE

Type	Light source	The manufacturer selected lens degree(θ1/2)	Input voltage (v)	Typical operating current (mA)	Typical consumption (w)	Typical luminance (lm)	IK rate
HX127T-18QD	6x3W RGBW 4in1	30°	24V DC	1000	24	1145	10

Underwater LED Spot Light



HX150T-36




Warning:
Must be installed in a place where contact water or under water to prevent being damaged from over heating.



DESCRIPTION

The underwater spot light series offers unparallel flexibility to match your creativity.
The sturdy tripod design does not topple easily even when water movement is very agitated.
If preferred, the fixture can also be fixed in place using just the mounting bracket.
All Ideal LED lights can be programmed to dim, synchronize to create infinite combinations of kaleidoscopic displays.

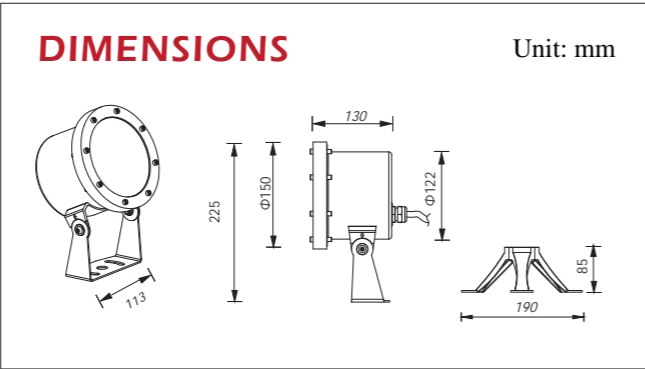

SPECIFICATIONS

- ◆ Front cover & Housing: hard chrome plated molding shaped stainless steel SUS 316L
- ◆ Light Window: PMMA 8mm
- ◆ Gasket: silicone gasket
- ◆ PCB: excellent heat conductivity aluminum, coefficient of heat conductivity ≥ 2.0 w/mk
- ◆ Application environment: temperature of water between $-20^{\circ}\text{C} \sim 40^{\circ}\text{C}$ less than 1 meter depth
- ◆ Cable gland: IP-68 PG-11 copper with nickel-coated
- ◆ Power cable: 3m STW 18AWG



Illuminance at a distance

Distance (m)	Center Beam (LUX)	Angle	Beam Width	
			(V)	(H)
2m	2082.77 LUX		1.0m	0.9m
4m	520.69 LUX		1.9m	1.9m
6m	231.42 LUX		2.9m	2.8m
8m	130.17 LUX		3.9m	3.8m
10m	83.31 LUX		4.9m	4.7m
12m	57.85 LUX		5.8m	5.6m

PERFORMANCE

Type	Light source	The manufacturer selected lens degree(°1/2)	Input voltage (V)	Typical operating current (mA)	Typical consumption (W)	Typical luminance (lm)	IK rate
HX150T-36	12x3W	30°	24V DC	1600	38.4	Cool white=3031 Warm white=2668	10

Underwater LED Spot Light



HX150T-20




Warning:
Must be installed in a place where contact water or under water to prevent being damaged from over heating.




DESCRIPTION

The underwater spot light series offers unparallel flexibility to match your creativity.
The sturdy tripod design does not topple easily even when water movement is very agitated.
If preferred, the fixture can also be fixed in place using just the mounting bracket.
All Ideal LED lights can be programmed to dim, synchronize to create infinite combinations of kaleidoscopic displays.

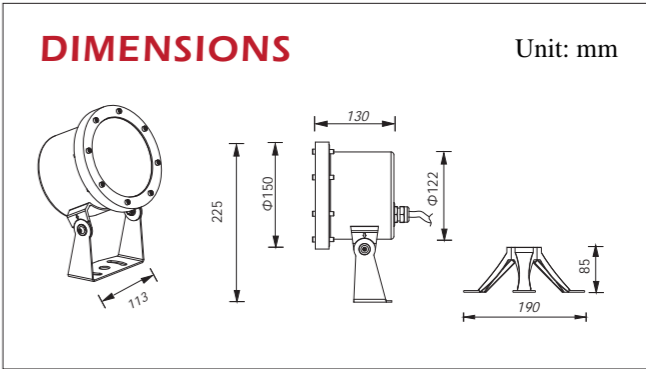

SPECIFICATIONS

- ◆ Front cover & Housing: hard chrome plated molding shaped stainless steel SUS 316L
- ◆ Light Window: PMMA 8mm
- ◆ Gasket: silicone gasket
- ◆ PCB: excellent heat conductivity aluminum, coefficient of heat conductivity ≥ 2.0 w/mk
- ◆ Application environment: temperature of water between $-20^{\circ}\text{C} \sim 40^{\circ}\text{C}$ less than 1 meter depth
- ◆ Cable gland: IP-68 PG-11 copper with nickel-coated
- ◆ Power cable: 3m STW 18AWG



Illuminance at a distance

Distance (m)	Center Beam (LUX)	Angle	Beam Width	
			(V)	(H)
2m	1531.21 LUX		0.9m	0.8m
4m	382.80 LUX		1.7m	1.7m
6m	170.13 LUX		2.6m	2.5m
8m	95.70 LUX		3.4m	3.3m
10m	61.25 LUX		4.3m	4.2m
12m	42.53 LUX		5.2m	5.0m

PERFORMANCE

Type	Light source	The manufacturer selected lens degree(°1/2)	Input voltage (V)	Typical operating current (mA)	Typical consumption (W)	Typical luminance (lm)	IK rate
HX150T-20	1×20W	22°	24V DC	860	20.5	Cool white=1679 Warm white=1478	10

Underwater LED Spot Light



HX150T-30T




Warning:
Must be installed in a place where contact water or under water to prevent being damaged from over heating.




DESCRIPTION

The underwater spot light series offers unparallel flexibility to match your creativity.
The sturdy tripod design does not topple easily even when water movement is very agitated.
If preferred, the fixture can also be fixed in place using just the mounting bracket.
All Ideal LED lights can be programmed to dim, colour- change and synchronize to create infinite combinations of kaleidoscopic displays.

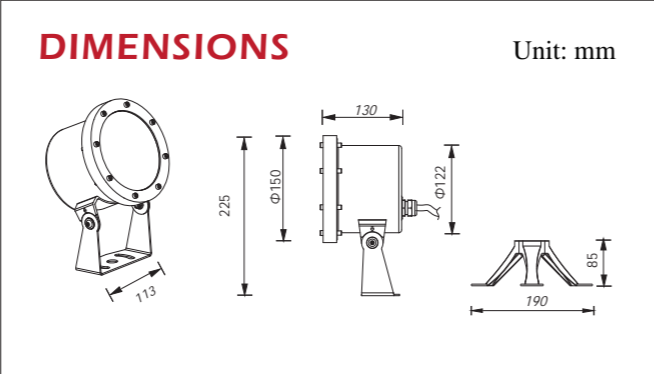

SPECIFICATIONS

- ◆ Front cover & Housing: hard chrome plated molding shaped stainless steel SUS 316L
- ◆ Light Window: PMMA 8mm
- ◆ Gasket: EPDM gasket
- ◆ PCB: excellent heat conductivity aluminum, coefficient of heat conductivity≥2.0w/mk
- ◆ Application environment: temperature of water between -20℃~40℃ less than 1 meter depth
- ◆ Cable gland: IP-68 PG-11 copper with nickel-coated
- ◆ Power cable: 3m STW 18AWG



Illuminance at a distance

Distance (m)	Center Beam (LUX)	Angle	Beam Width	
			(V)	(H)
2m	508.05 LUX		1.1m	1.1m
4m	127.01 LUX		2.1m	2.1m
6m	56.45 LUX		3.2m	3.2m
8m	31.75 LUX		4.3m	4.2m
10m	20.32 LUX		5.3m	5.3m
12m	14.11 LUX		6.4m	6.3m

PERFORMANCE

Order No.	Light source	The manufacturer selected lens degree(θ1/2)	Input voltage (v)	Typical operating current (mA)	Typical consumption (w)	Typical luminance (lm)	IK rate
HX150T-30T	6x5W RGB 3in1	30°	24V DC	1600	38.4	835	10

Underwater LED Spot Light



HX150T-30QD




Warning:
Must be installed in a place where contact water or under water to prevent being damaged from over heating.




DESCRIPTION

The underwater spot light series offers unparallel flexibility to match your creativity.
The sturdy tripod design does not topple easily even when water movement is very agitated.
If preferred, the fixture can also be fixed in place using just the mounting bracket.
RDM function: DMX address to be read and written. Provide operating voltage, current and temperature of light. Provide basic data such as supplier information.

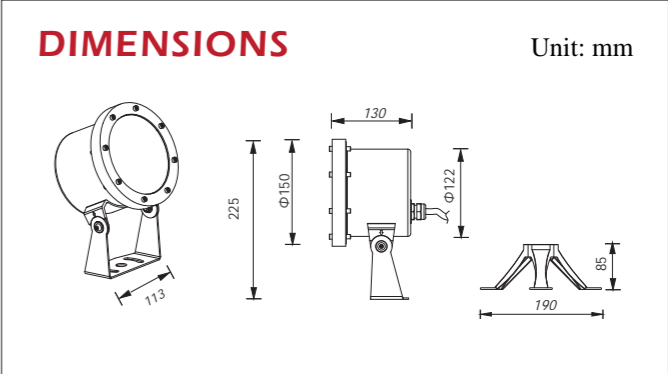

SPECIFICATIONS

- ◆ Front cover & Housing: hard chrome plated molding shaped stainless steel SUS 316L
- ◆ Light Window: PMMA 8mm
- ◆ Gasket: EPDM gasket
- ◆ PCB: excellent heat conductivity aluminum, coefficient of heat conductivity≥2.0w/mk
- ◆ LED Driver: Constant Voltage Input, Constant Current Output
- ◆ Application environment: temperature of water between -20℃~40℃ less than 1 meter depth
- ◆ Built-in Overheat Sensor System: Automatic Shutdown at 75℃
- ◆ Cable gland: IP-68 PG-11 copper with nickel-coated
- ◆ Power cable: H05RR-F 3m
- ◆ Signal type: DMX512/RDM signal




Illuminance at a distance

Distance (m)	Center Beam (LUX)	Angle	Beam Width	
			(V)	(H)
2m	508.05 LUX		1.1m	1.1m
4m	127.01 LUX		2.1m	2.1m
6m	56.45 LUX		3.2m	3.2m
8m	31.75 LUX		4.3m	4.2m
10m	20.32 LUX		5.3m	5.3m
12m	14.11 LUX		6.4m	6.3m

PERFORMANCE

Order No.	Light source	The manufacturer selected lens degree(θ1/2)	Input voltage (v)	Typical operating current (mA)	Typical consumption (w)	Typical luminance (lm)	IK rate
HX150T-30QD	6x5W RGBW 4in1	30°	24V DC	1500	36	1837	10



Underwater LED Spot Light



HX224T-36



Warning:
Must be installed underwater to prevent being damaged from over heating.




SPECIFICATIONS

- ◆ Front cover & Housing: hard chrome plated molding shaped stainless steel SUS 316L
- ◆ Light Window: step tempered glass. T=10mm
- ◆ Gasket: EPDM gasket
- ◆ PCB: excellent heat conductivity aluminum, coefficient of heat conductivity≥2.0w/mk
- ◆ Application environment: temperature of water between -20℃~40℃ less than 1 meter depth
- ◆ Cable gland: IP-68 PG11 copper with nickel-coated
- ◆ Power cable: 3m STW 18AWG

DESCRIPTION

The underwater spot light series offers unparallel flexibility to match your creativity.
The sturdy tripod design does not topple easily even when water movement is very agitated.
If preferred, the fixture can also be fixed in place using just the mounting bracket.
All Ideal LED lights can be programmed to dim, synchronize to create infinite combinations of kaleidoscopic displays.

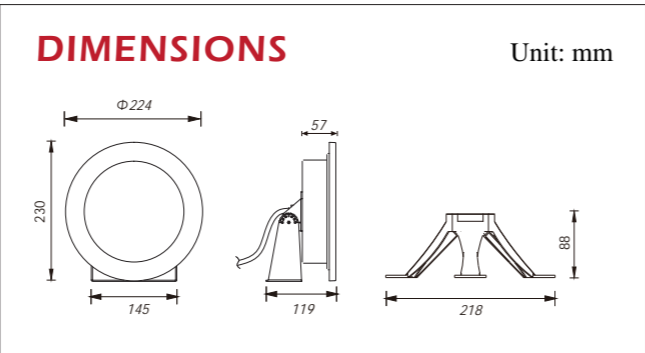

Illuminance at a distance

Distance (m)	Center Beam (LUX)	Angle	Beam Width	
			(V)	(H)
2m	967.56 LUX		1.0m	1.0m
4m	241.89 LUX		1.9m	1.9m
6m	107.51 LUX		2.9m	2.9m
8m	60.47 LUX		3.8m	3.8m
10m	38.70 LUX		4.8m	4.8m
12m	26.88 LUX		5.8m	5.7m

PERFORMANCE

Type	Light source	The manufacturer selected lens degree(θ1/2)	Input voltage (v)	Typical operating current (mA)	Typical consumption (w)	Typical luminance (lm)	IK rate
HX224T-36	18x2W	35°	24V DC	1900	45.6	Cool white=2221 Warm white=1828	10

Underwater LED Spot Light



HX224T-48T



Warning:
Must be installed underwater to prevent being damaged from over heating.





SPECIFICATIONS

- ◆ Front cover & Housing: hard chrome plated molding shaped stainless steel SUS 316L
- ◆ Light Window: step tempered glass. T=10mm
- ◆ Gasket: EPDM gasket
- ◆ PCB: excellent heat conductivity aluminum, coefficient of heat conductivity≥2.0w/mk
- ◆ Application environment: temperature of water between -20℃~40℃ less than 1 meter depth
- ◆ Cable gland: IP-68 PG-11 copper with nickel-coated
- ◆ Power cable: 3m STW 18AWG

DESCRIPTION

The underwater spot light series offers unparallel flexibility to match your creativity.
The sturdy tripod design does not topple easily even when water movement is very agitated.
If preferred, the fixture can also be fixed in place using just the mounting bracket.
All Ideal LED lights can be programmed to dim, colour- change and synchronize to create infinite combinations of kaleidoscopic displays.

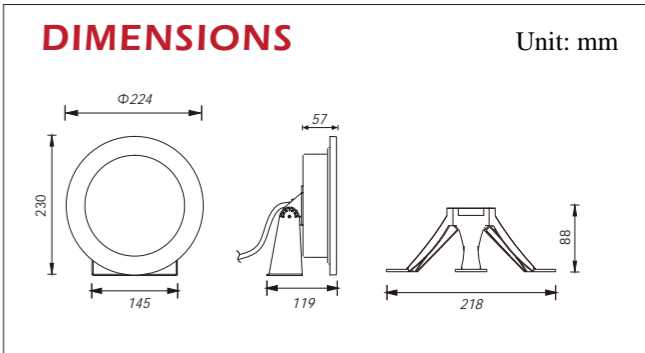



Illuminance at a distance

Distance (m)	Center Beam (LUX)	Angle	Beam Width	
			(V)	(H)
2m	854.65LUX		1.1m	1.1m
4m	213.66 LUX		2.2m	2.1m
6m	94.96 LUX		3.3m	3.2m
8m	53.42 LUX		4.4m	4.3m
10m	34.19 LUX		5.5m	5.3m
12m	23.74 LUX		6.6m	6.4m

PERFORMANCE

Type	Light source	The manufacturer selected lens degree(θ1/2)	Input voltage (v)	Typical operating current (mA)	Typical consumption (w)	Typical luminance (lm)	IK rate
HX224T-48T	12x4W RGB 3in1	30°	24V DC	2400	57.6	1488	10





Underwater LED Spot Light



HX211TL-12




Warning:
Must be installed in a place where contact water or under water to prevent being damaged from over heating.



DESCRIPTION

The linear design of the underwater LED spot light series opens up new possibilities when lighting your pool.
The versatile mounting bracket of the underwater LED spot light HX211TL enables a true 180° range of tilt which allows it to be used as an up or down lighter. Perfect as wall-washers and for water features with long edges that need to beaccented.
All Ideal LED lights can be programmed to dim, synchronize to create infinite combinations of kaleidoscopic displays.

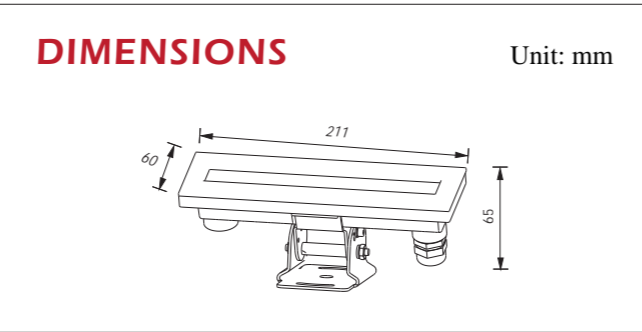

SPECIFICATIONS

- ◆ Housing: hard chrome plated molding shaped stainless steel SUS 316
- ◆ Front cover: hard chrome plated stainless steel SUS 316L
- ◆ Light Window: step tempered glass. T=5mm
- ◆ PCB: excellent heat conductivity aluminum, coefficient of heat conductivity≥2.0w/mk
- ◆ Application environment: temperature of water between -20℃~40℃ less than 1 meter depth
- ◆ Cable gland: IP-68 PG-11 copper with nickel-coated
- ◆ Power cable: 3m STW 18AWG
- ◆ Seal: molding shaped silicon seal under the front cover silicon glue among LED, lens and PCB



Illuminance at a distance

Distance (m)	Center Beam (LUX)	Angle	Beam Width	
			(V)	(H)
2m	306.75 LUX		1.1m	1.1m
4m	76.69 LUX		2.1m	2.1m
6m	34.08 LUX		3.2m	3.2m
8m	19.17 LUX		4.3m	4.2m
10m	12.27 LUX		5.3m	5.3m
12m	8.52 LUX		6.4m	6.4m

PERFORMANCE

Type	Light source	The manufacturer selected lens degree(Θ1/2)	Input voltage (v)	Typical operating current (mA)	Typical consumption (w)	Typical luminance (lm)	IK rate
HX211TL-12	6x2W	30°	24V DC	491	11.8	Cool white=605 Warm white=520	08

Underwater LED Spot Light



HX211TL-12T




Warning:
Must be installed in a place where contact water or under water to prevent being damaged from over heating.




DESCRIPTION

The linear design of the underwater LED spot light series opens up new possibilities when lighting your pool.
The versatile mounting bracket of the underwater LED spot light HX211TL enables a true 180° range of tilt which allows it to be used as an up or down lighter. Perfect as wall-washers and for water features with long edges that need to beaccented.
All Ideal LED lights can be programmed to dim, colour- change and synchronize to create infinite combinations of kaleidoscopic displays.

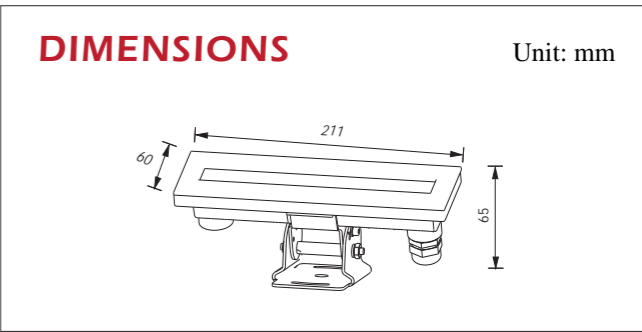

SPECIFICATIONS

- ◆ Housing: hard chrome plated molding shaped stainless steel SUS 316
- ◆ Front cover: hard chrome plated stainless steel SUS 316L
- ◆ Light Window: step tempered glass. T=5mm
- ◆ PCB: excellent heat conductivity aluminum, coefficient of heat conductivity≥2.0w/mk
- ◆ Application environment: temperature of water between -20℃~40℃ less than 1 meter depth
- ◆ Cable gland: IP-68 PG-11 copper with nickel-coated
- ◆ Power cable: 3m STW 18AWG
- ◆ Seal: molding shaped silicon seal under the front cover silicon glue among LED, lens and PCB




Illuminance at a distance

Distance (m)	Center Beam (LUX)	Angle	Beam Width	
			(V)	(H)
2m	355.02 LUX		0.9m	1.0m
4m	88.75 LUX		1.9m	1.9m
6m	39.45 LUX		2.8m	2.9m
8m	22.19 LUX		3.8m	3.8m
10m	14.20 LUX		4.7m	4.8m
12m	9.86 LUX		5.6m	5.7m

PERFORMANCE


Type	Light source	The manufacturer selected lens degree(Θ1/2)	Input voltage (v)	Typical operating current (mA)	Typical consumption (w)	Typical luminance (lm)	IK rate
HX211TL-12T	6x2W RGB 3in1 Full color	30°	24V DC	R=200 G=250 B=250	16.8	465	08



System Configuration Diagram

Multiple Sub-controller in various models can be connected in series via DMX cable, to create an integrated system for all fountain equipments. This system provides a synchronized operation which creates precise sequencing effects.

The maximum length of DMX signal delivery is 100m, by fibre optic transmission, it's 25km.

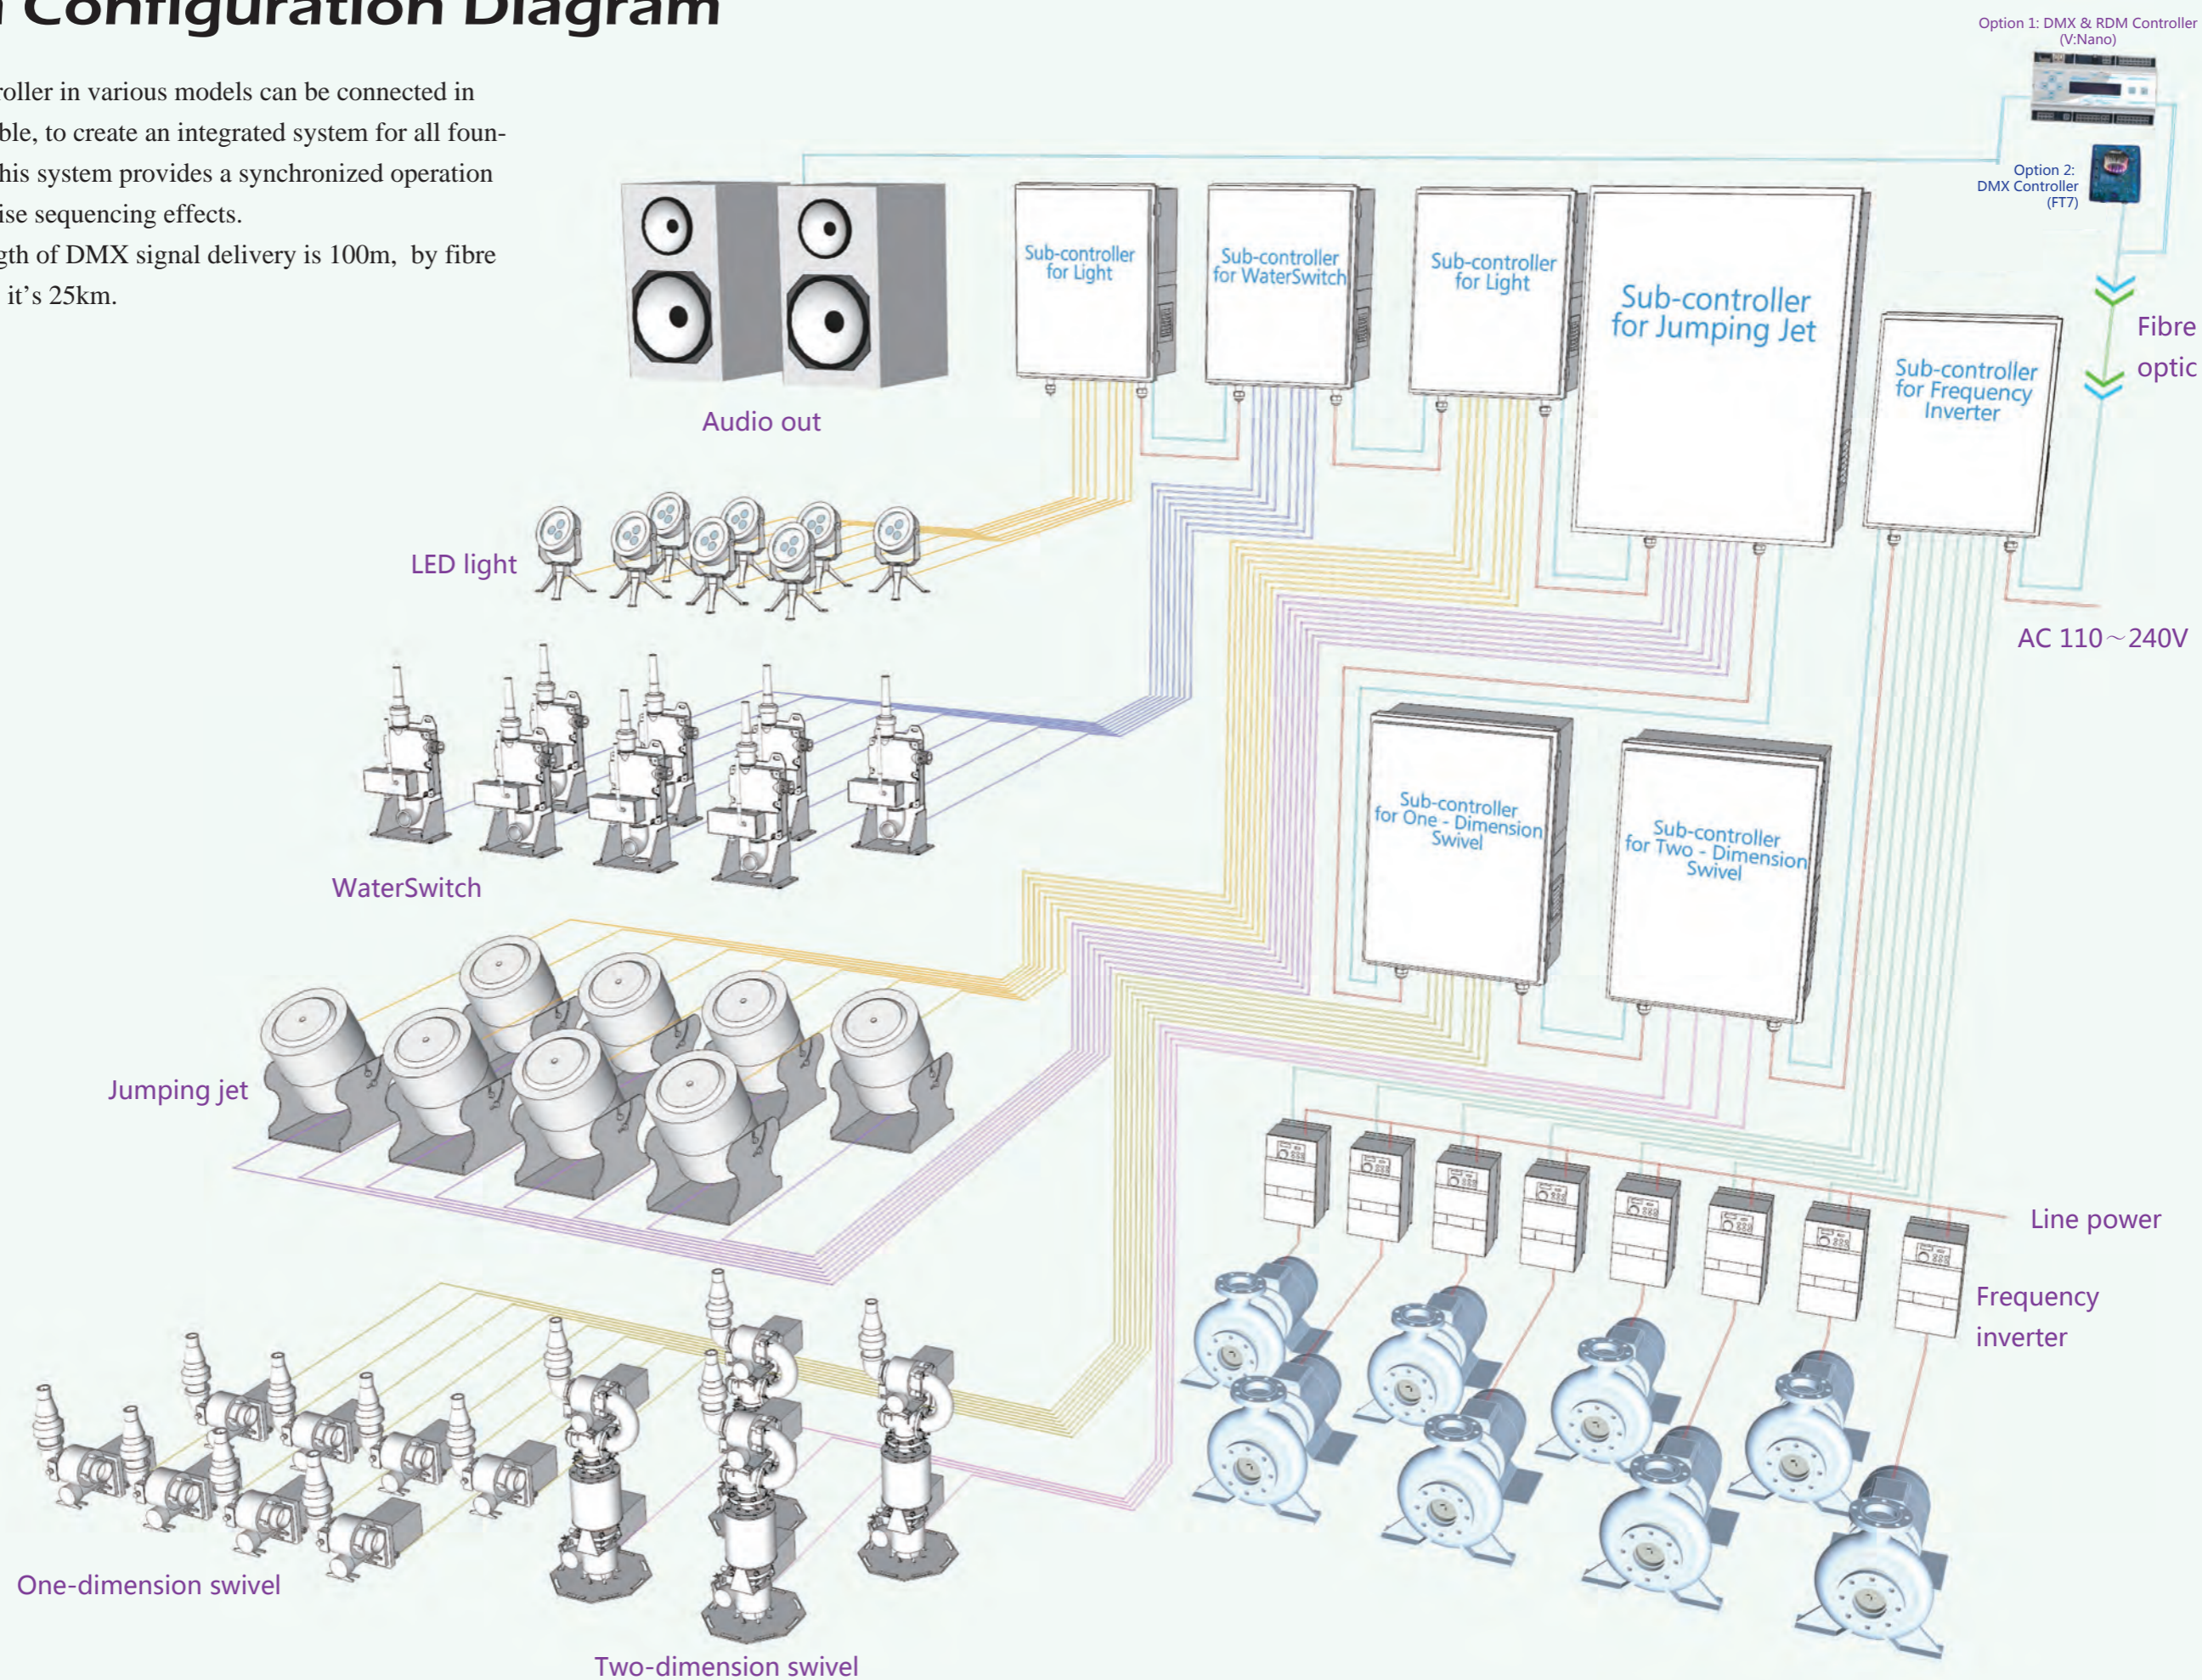

SC Series DMX Sub-controller

SC series DMX sub-controller is a comprehensive solution to the integration of fountain equipment's & DMX control system. It creates the perfect interface between light, jumping jet, shooter jet, frequency inverter for pump and the DMX controller.


All sequencing lighting and water effects can be synchronized in precise timing by DMX programming.




- ◆ Receive DMX 512 (1990) signal.
- ◆ Variety of models available for different applications.
- ◆ Can be connected in series via DMX cable.
- ◆ 4-points wall mounting.
- ◆ Built-in cooling fan.
- ◆ SP21/3P cable joint for power supply.
- ◆ XS12/3P cable joint for DMX signal connection.
- ◆ Multiple lock joint for output cable.

KEYWORD

SC 8 - L 320 D 24

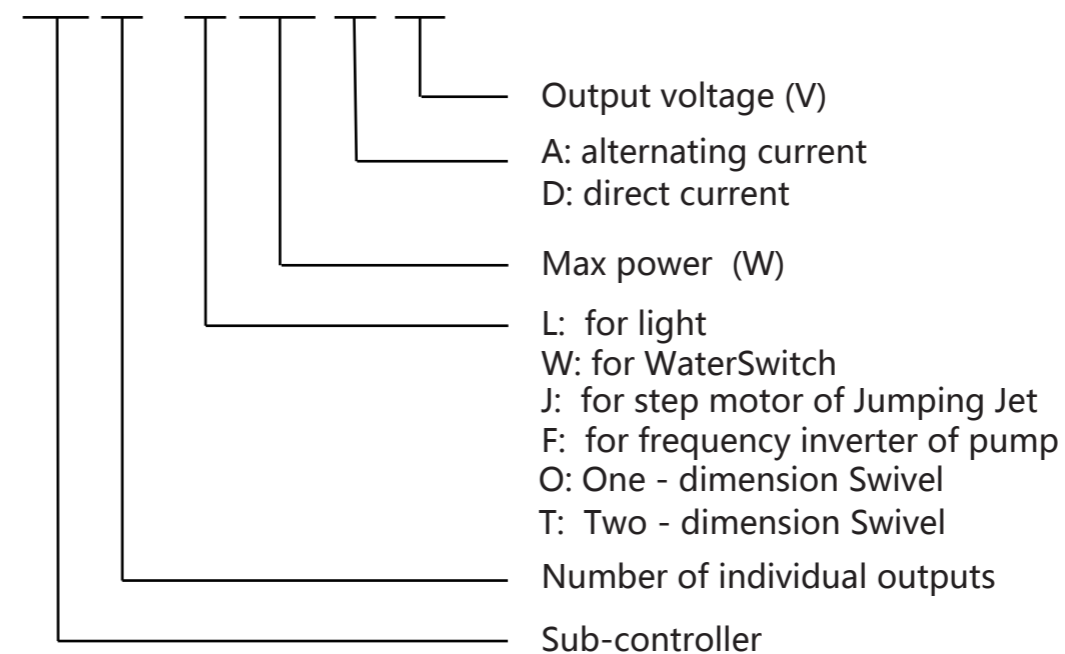




SC Series DMX Sub-controller

DMX Sub-controller for LED Light

There are 8 output connections per Sub-controller - the LED lights can be controlled individually or in clusters. The number of lights per loop is limited to the power output.

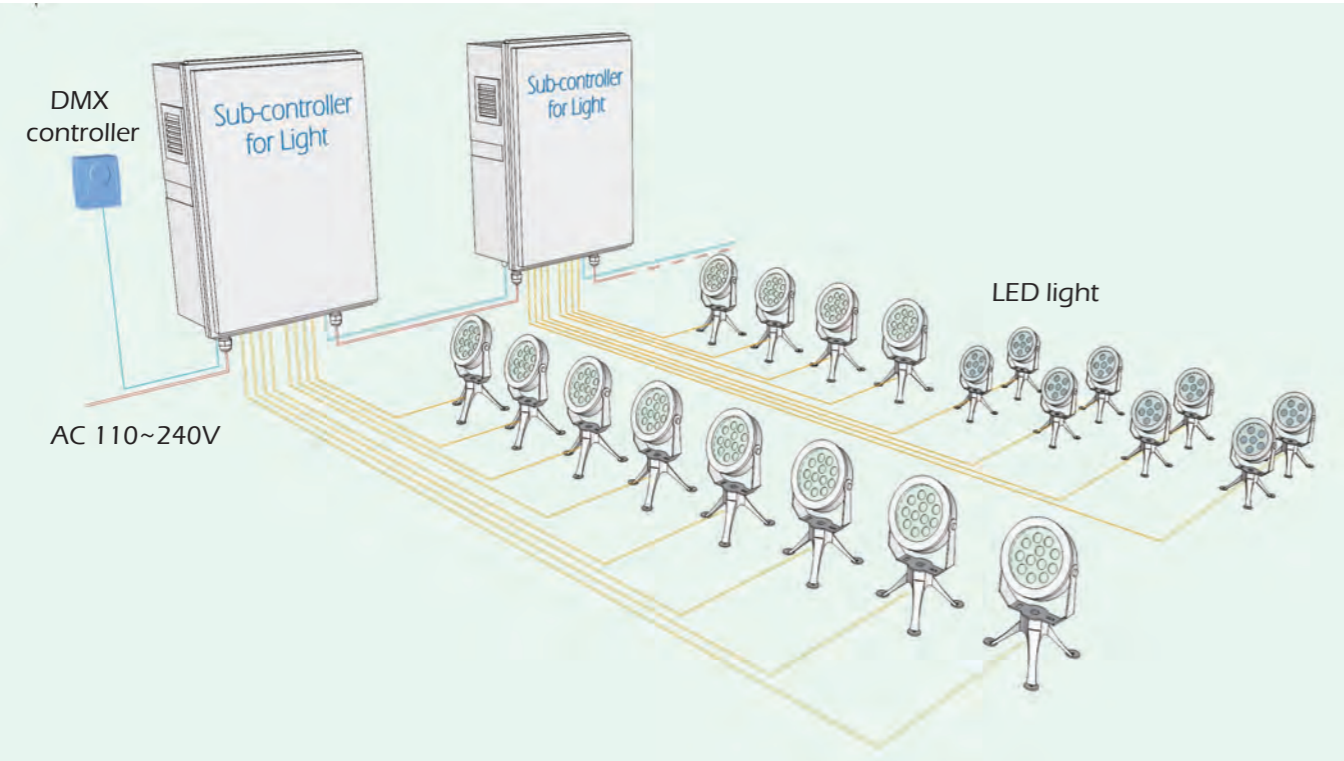


SPECIFICATION

Model	SC8-L320D24	SC8-L600D24	SC8-L320D12
I/O Signal	DMX 512		
Input Voltage	110~240V AC		
Loops of Output	8 loops		
Power Output per Loop	36 W	72 W	36 W
Output Current per Loop	1.5 A	3 A	3 A
Output Voltage	24VDC	24VDC	12V DC
Temperature	-10~+60 °C		
Humidity	20~90 %RH		
Cooling	Built-in cooling fan		
Dimensions (L x W x H) (mm)	500 x 400 x 200		
Weight	8 kg		
Material	ABS		
Color	Creamy white		

SC Series DMX Sub-controller


DMX Sub-controller for WaterSwitch

There are 10 output connections per sub-controller – each WaterSwitch can be individually controlled.

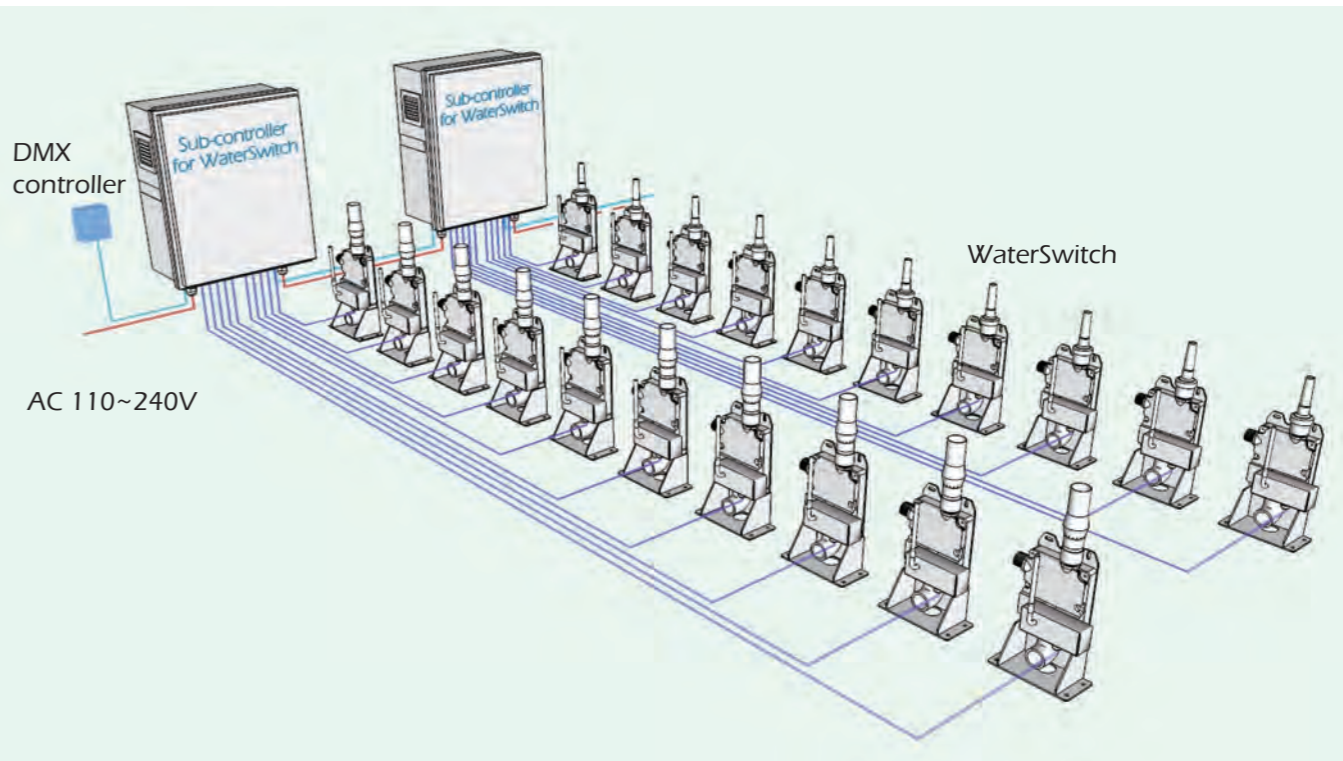

SPECIFICATION

Model	SC10-W150D24
I/O Signal	DMX 512
Input Voltage	110~240V AC
Loops of Output	10 loops
Power Output per Loop	10 W
Output Current per Loop	0.4 A
Output Voltage	24V DC
Temperature	-10~+60 °C
Humidity	20~90 %RH
Cooling	Built-in cooling fan
Dimensions (L x W x H) (mm)	500 x 400 x 200
Weight	8 kg
Material	ABS
Color	Creamy white






SC Series DMX Sub-controller

DMX Sub-controller for Jumping Jet.

There are 8 output connections per sub-controller for jumping jets – each Jumping Jet can be individually controlled. A sub-controller for lighting is required separately when built-in LED are used.

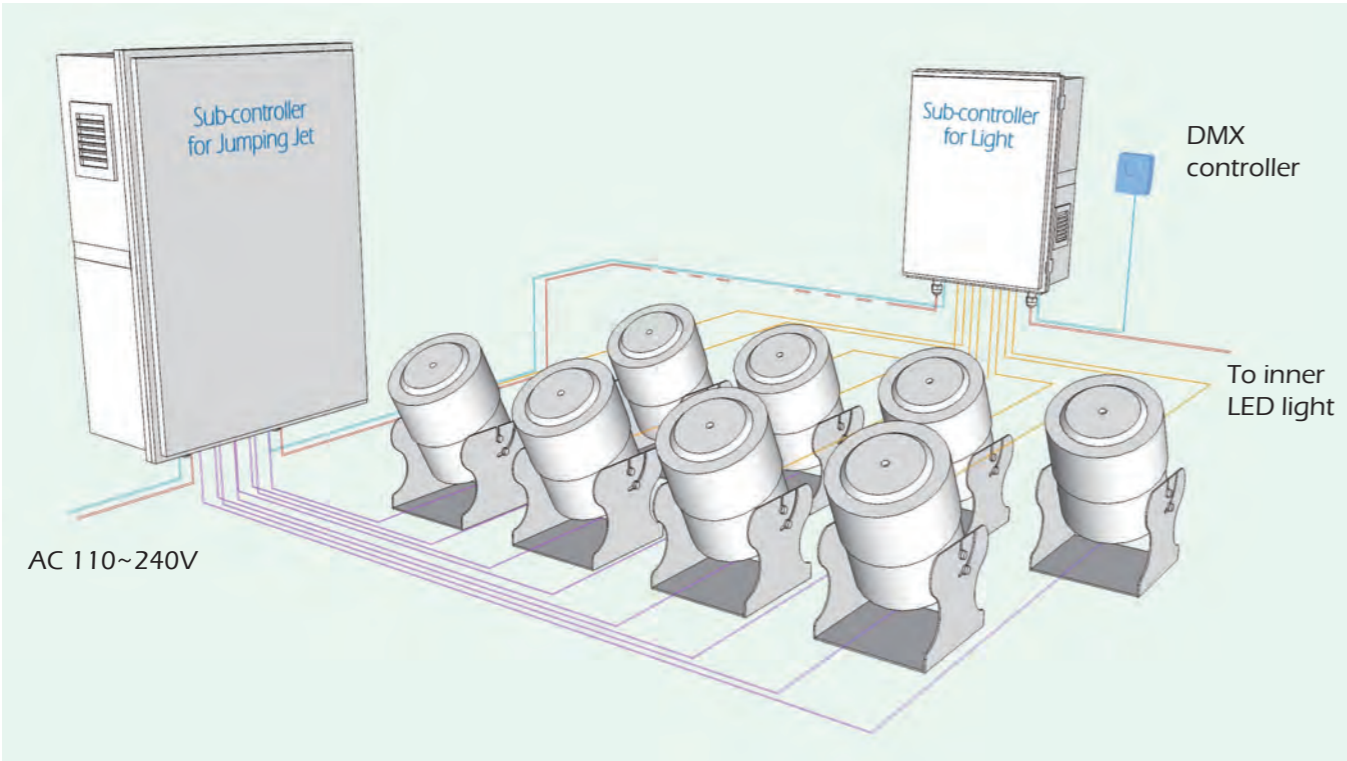


SPECIFICATION

Model	SC8-J960D24	SC4-J640D24
I/O Signal	DMX 512	
Input Voltage	110~240V AC	
Loops of Output	8 loops	4 loops
Power Output per Loop	72 W	
Output Current per Loop	3 A	
Output Voltage	24V DC	
Temperature	-10~+60 °C	
Humidity	20~90 %RH	
Cooling	Built-in cooling fan	
Dimensions (L x W x H) (mm)	830 x 630 x 300	
Weight	35 kg	11.6 kg
Material	ABS	
Color	Creamy white	

SC Series DMX Sub-controller


DMX Sub-controller for Frequency Inverter.

There are 8 output connections per sub-controller for 8 inverters – each inverter can be individually controlled – the speed of pump changes in response to DMX signal via inverter (0~60Hz stepless).

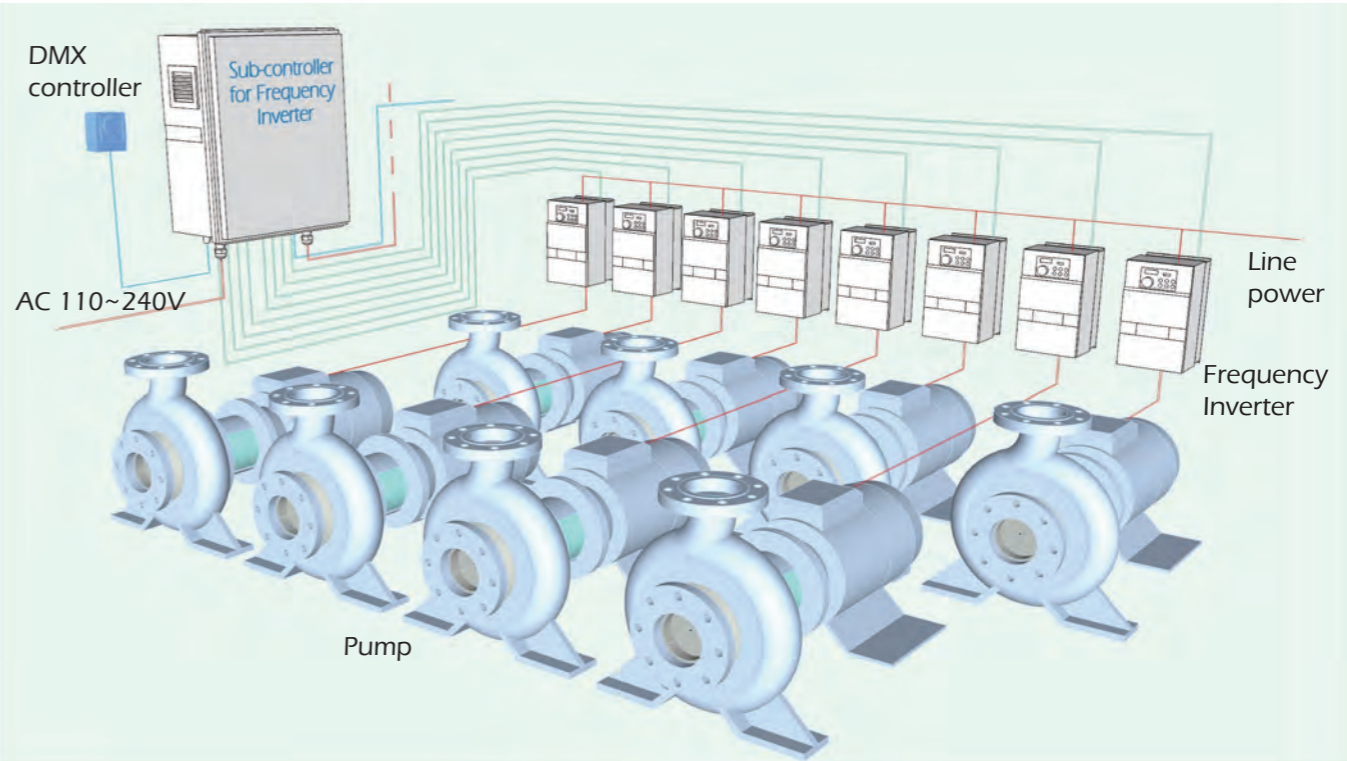

SPECIFICATION

Model	SC8-F35	SC-F204
I/O Signal	DMX 512	
Input Voltage	110~240V AC	
Loops of Output	8 loops	4 loops
Power Output per Loop	4 W	
Output Current per Loop	20 mA	
Output Voltage	10V DC	
Temperature	-10~+55 °C	
Humidity	20~90 %RH	
Cooling	Natural air	
Dimensions (L x W x H) (mm)	500 x 400 x 160	
Weight	6.5 kg	6.2 kg
Material	ABS	
Color	Creamy white	






SC Series DMX Sub-controller

DMX Sub-controller for One-dimension Swivel

There are 8 output connections per sub-controller for one - dimension swivel – each one-dimension swivel can be individually controlled.

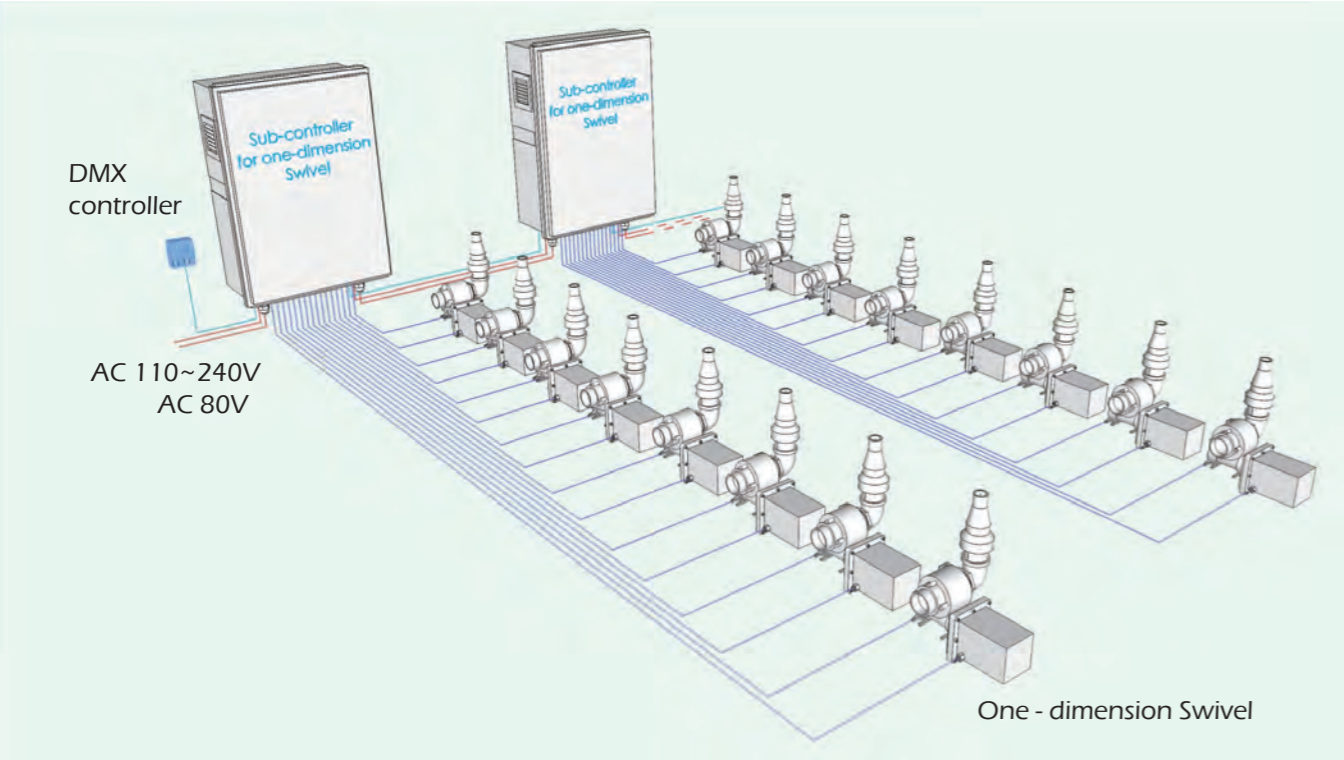


SPECIFICATION

Model	SC8-O300A80
I/O Signal	DMX 512
Input Voltage (Control)	110-240V AC
Input Voltage (Stepper motor)	80V AC
Loops of Output	8
Power Output per Loop	300W
Output Current per Loop	4A
Output Voltage (Sensor)	24V DC
Output Voltage (Stepper motor)	80V AC
Temperature	-10~+50 °C
Humidity	20~90 %RH
Cooling	Built-in cooling fan
Dimensions (L x W x H) (mm)	830 x 630 x 300
Weight	35 kg
Material	ABS
Color	Creamy white

SC Series DMX Sub-controller


DMX Sub-controller for Two-dimension Swivel

There are 4 output connections per sub-controller for two-dimension swivel – each two-dimension swivel can be individually controlled.

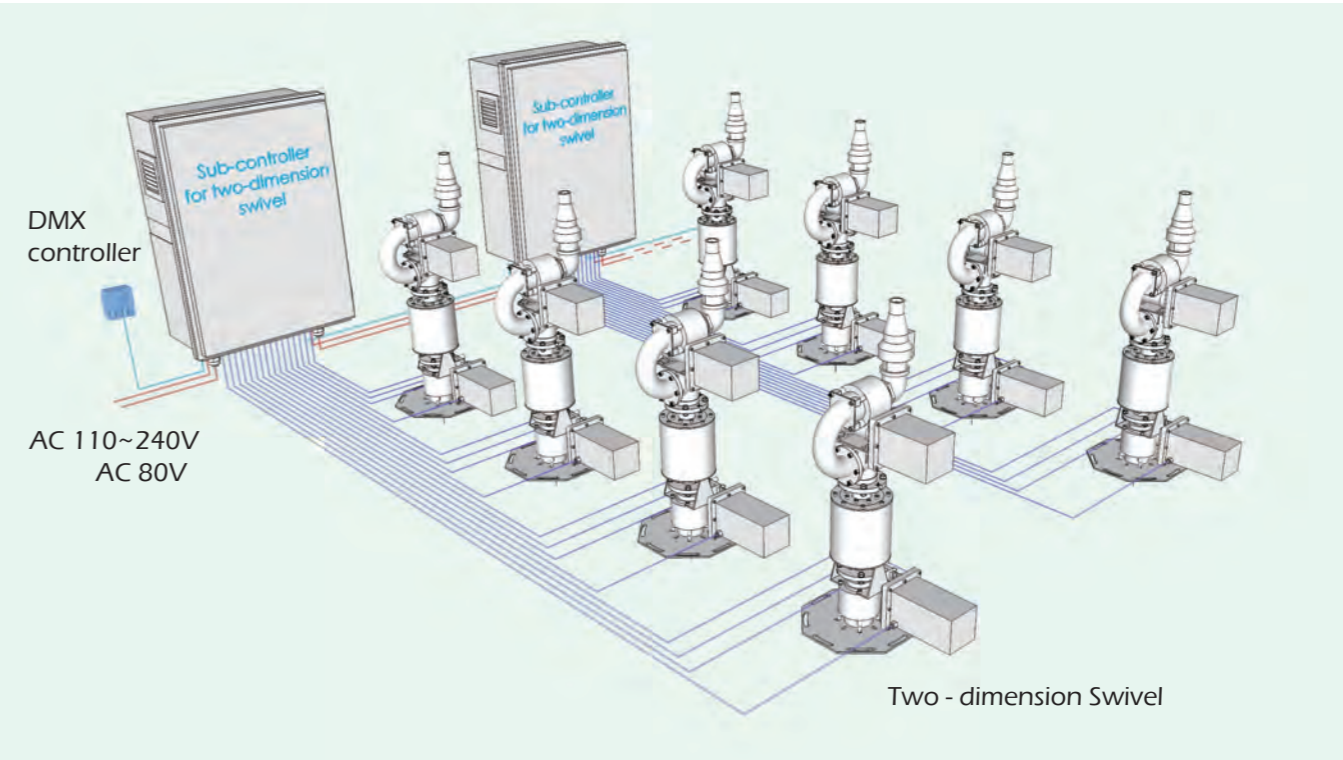

SPECIFICATION

Model	SC4-T700A80
I/O Signal	DMX 512
Input Voltage (Control)	110-240V AC
Input Voltage (Stepper motor)	80V AC
Loops of Output	4
Power Output per Loop	700W
Output Current per Loop	9 A
Output Voltage (Sensor)	24V DC
Output Voltage (Stepper motor)	80V AC
Temperature	-10~+50 °C
Humidity	20~90 %RH
Cooling	Built-in cooling fan
Dimensions (L x W x H) (mm)	830 x 630 x 300
Weight	35 kg
Material	ABS
Color	Creamy white






Intergrated control system


ICS1024/ICS1024M-2/ICS512-2




Dimension

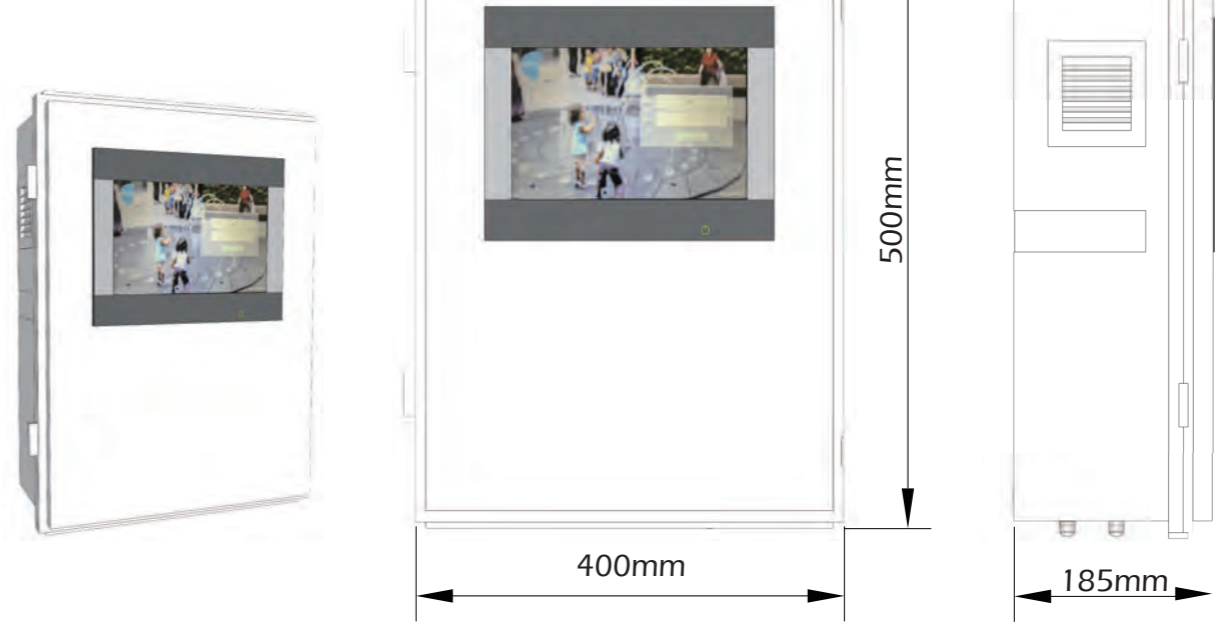

INTEGRATED CONTROL SYSTEM	ICS1024	ICS1024M-2	ICS512-2
Dimensions (L x W x H) (mm)	400x185x500	400x185x500	400x185x500
Weight	10.2 kg	10.2 kg	10.2 kg
Housing	ABS	ABS	ABS
Protection class	IP20	IP20	IP20
Backup Battery	3V lithium battery CR2032 x 1	—	—
Backup Battery Life	It depends on the temperature used and the conditions of usage, about 3 years or more at 25°C	—	—
Storage Temperature	0-50°C	0-50°C	0-50°C
Operation temperature	0-40°C/0-80°C humidity non-condensed	0-40°C/0-80°C humidity non-condensed	0-40°C/0-80°C humidity non-condensed
Power supply	220V AC	220V AC	220V AC
Outputs	16 x Digital out	8 x Digital out	8 x Digital out
Inputs	16 x Digital in	12 x Digital in	12 x Digital in
Memory	Micro SD-Card for Show-Files	Micro SD-Card for Show-Files	Micro SD-Card for Show-Files
Operation	HMI	HMI	HMI
Audio	—	Yes	—
Standalone shows	ARC-Stream file& Audio file	WDS file	WDS file
Interface	2x512DMX channels for ICS1024M /ICS1024	2x512DMX channels for ICS1024M-2 1x512DMX channels for ICS512-2	2x512DMX channels for ICS1024M-2 1x512DMX channels for ICS512-2
Scheduler	General 10 nos. / Special 1 no.	General 10 nos. / Special 1 no.	General 10 nos. / Special 1 no.
Action Manager & monitor	Event Actions: Digital Inputs can be linked with actions (water level) and monitor	Event Actions: Digital Inputs can be linked with actions (water level) and monitor	Event Actions: Digital Inputs can be linked with actions (water level) and monitor
Software	Windows 10 or better	Windows 10 or better	Windows 10 or better





DMX & RDM Controller

V:Nano 512/V:Nano 1024 music



Ideal rolls out its new DIN-rail fanless ruggedized embedded systems with extra low power CPU chipset, the V:Nano 512 / V:Nano 1024 music. Made for the rugged environment, this compact unit supports wide temperature range and features DMX 512/1990 ports, isolated Ethernet port 10/100 Mbit, Micro SD card slot, 2x 16 LCD segment display.

Its 8 x digital and 8 x analog I/O makes this unit the perfect tool for all stand alone fountain multimedia show Installations.The DIN-rail hardware family is compatible to all Depence architect or ultimate versions.

Show Upload can be done via SD Card or local network.Windows Remote Live Panel Software and Service tools will be shipped with this package as well.

- ◆ Standalone Multimedia Showplayer
- ◆ 512/1024 DMX output channels
- ◆ Audio Output(V:Nano 1024 only)
- ◆ Time Schedule with internal clock
- ◆ Show upload via MicroSD-Card or Ethernet
- ◆ 8x Digital Input and 8x Digital Output
- ◆ DIN-Rail mounting
- ◆ Live-Panel functionality via Remote Software
- ◆ Easy to use front panel setup
- ◆ ArtNET Node functionality

Made in Germany

DIMENSIONS

Unit: mm

A

B

C

D

E

H

G

F

A:MicroSD Card Slot-Any number of shows or sequences for a project can be saved in the micro SD card(4GB included)

B:Ethernet 10/100 Mbit-update shows

C:Audio output 3.5mm Jack Plug(V:Nano 1024 music only)

D:External Power 24V DC

E:8x digital output max 1A/Output


F: Digital Input max.24V DC

G:DMX512/1990 (“V:Nano 512”512 chanel/“V:Na-no 1024 music”1024 channel)

H:Power input 15-24V DC,8W

DMX & RDM Controller	V:Nano 512	V:Nano 1024 music
Dimensions (L x W x H)	160 x 90 x 58 mm	
Weight	0.33 kg	
Housing	Polycarbonate Light grey/white/blue for top-hat rail mounting	
Protection class	IP20	
Power supply	15..24V DC/ 8W	
Operation temperature	0..40°C / 0..80% humidity non-condensed	
Certification	CE	
Outputs	DMX 512/1990 512 channel 8 x Digital Out (Clamps 24V DC/ 1A max., optically isolated)	DMX 512/1990 1024 channel 8 x Digital Out (Clamps 24V DC/ 1A max., optically isolated) 1 x Stereo Audio (3,5 mm jack plug, galvanic isolated)
Inputs	8 x Digital In (Clamps 24V DC., optically isolated)	
Others connections	Ethernet RJ45 10/100Mbit	
Memory	MicroSD-Card	
Operation	2 x 16 Segment LCD Display with 6 keys	





Y-Strainer



The Y-strainer is designed to be used with nozzle to protect nozzles from clogging:

CHARACTERISTICS

- ◆ Available in various sizes and flows.
- ◆ Can be combined with other Y-strainer products to increase filtration.
- ◆ Made of plastic.

DIMENSIONS

Type	Inlet	Outlet	A dim (mm)	B dim (mm)	Mesh Opening Size(mm)
Y25	De32	De32	186	150	1
Y32	De40	De40	223	147	1
Y40	De50	De50	234	163	1

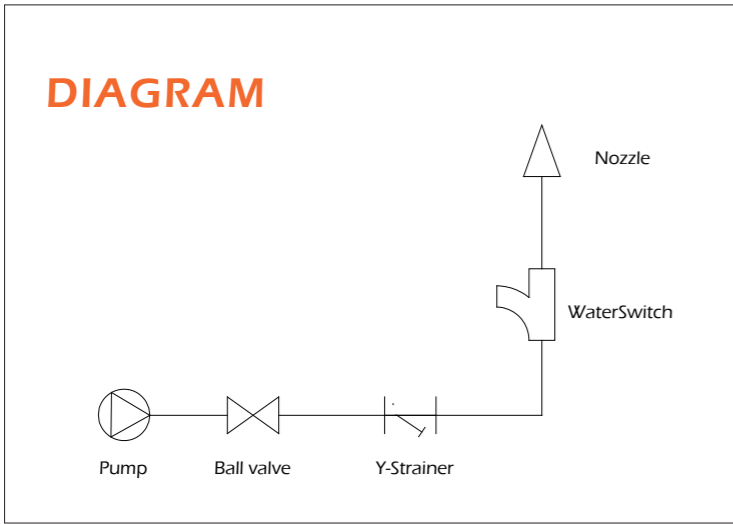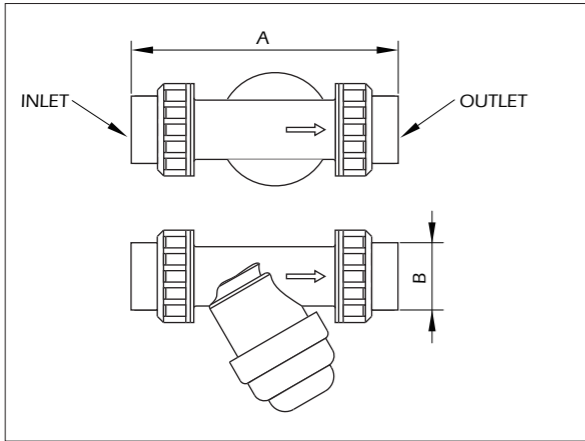

Swivel Connector


Connects to the bottom of nozzles to help directional alignment after installation:

CHARACTERISTICS

- ◆ Adjusts up to 4° from center line.
- ◆ Made of stainless steel fitted

DIMENSIONS

Type	Inlet	Outlet	A dim (mm)	B dim (mm)
SJ25	G1"	G1"	84	60
SJ40	G1 1/2"	G1 1/2"	102	81
SJ50	G2"	G2"	117	77

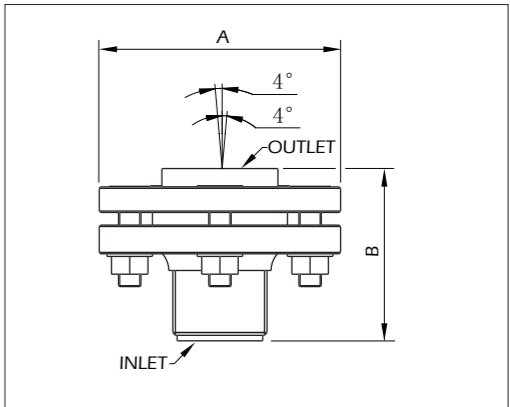

Quick Connector

Two parts respectively connect to the pipe and the bottom of nozzle to help install and dismantle

CHARACTERISTICS



- ◆ Made of stainless steel fitted
- ◆ Three kinds of outlets


DIMENSIONS

Type	Inlet (Pagoda Joint)	Outlet (Inside Thread)	A dim (mm)	B dim (mm)
QCI25	Φ25	G1"	58	118
QCI40	Φ39.4	G1 1/2"	85	134
QCI50	Φ51.2	G2"	95	147


Type	Inlet (Outside Thread)	Outlet (Pagoda Joint)	A dim (mm)	B dim (mm)
QCO25	G1"	Φ25	58	123
QCO40	G1 1/2"	Φ39.4	85	140
QCO50	G2"	Φ51.2	95	160

Type	Inlet (Pagoda Joint)	Outlet (Pagoda Joint)	A dim (mm)	B dim (mm)
QCP25	Φ25	Φ25	58	162
QCP40	Φ39.4	Φ39.4	85	180
QCP50	Φ51.2	Φ51.2	95	195

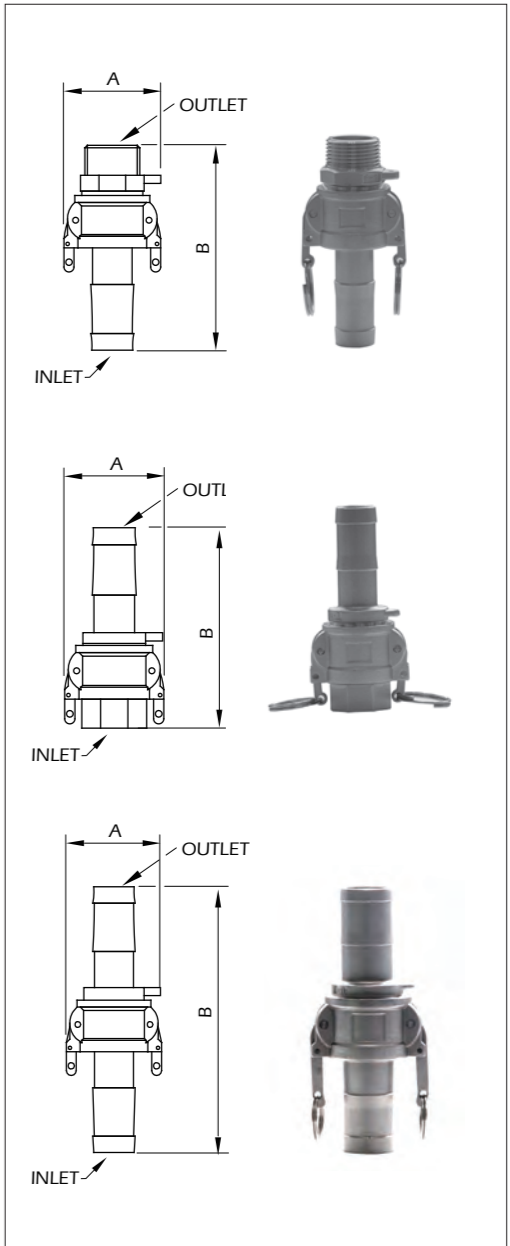




Underwater Power Supply

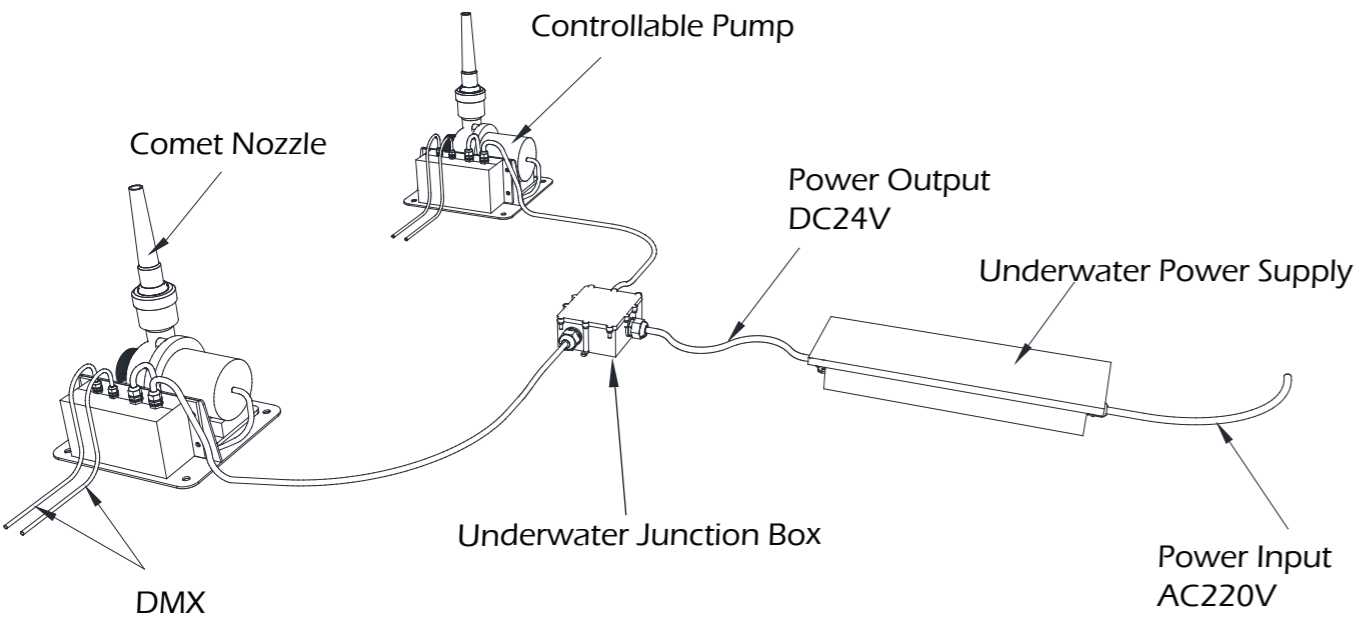

HXPS-200-12 / HXPS-200-24


The underwater power supply HXPS-200 is fully potted power supply.It is a 200W industrial AC/DC power supply featuring the outstanding capability to operate under a harsh environment with high dust density,humidity,vibration and altitude.
The entire series is housed with a stainless steel 304 case and fully potted with epoxy resin.It guarantees a safe and long-lasting functioning under water.
Even low voltage devices can now be operated with the underwater power supply which leads to enormous reduction of time and material cost at the installation sites.

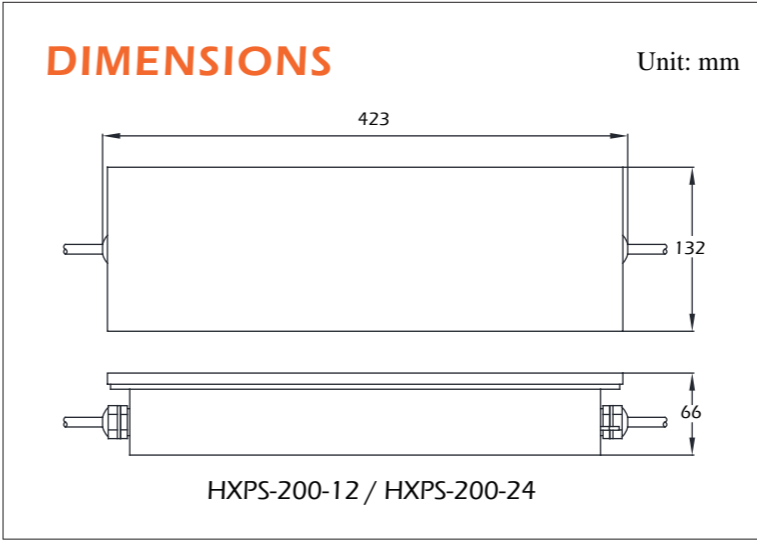


CHARACTERISTICS

- ◆ Constant Voltage & Constant current mode output.
- ◆ No load / Standby power consumption<0.5W
- ◆ IP68 design. Rating for underwater intallation.
- ◆ Typical lifetime > 40000 hours.
- ◆ Cable type(Input):1.5m STW 18AWG/3C
- ◆ Cable type(Output):1.5m STW 18AWG/2C


Type	HXPS-200-12	HXPS-200-24
Dimensions (L×W×H) [mm]	423×132×66	423×132×66
Nominal input voltage[V/AC]	100-305	100-305
Nominal input frequency[Hz]	47~63	47~63
Output voltage[V]	12	24
Output current[A]	16	8.4
Efficiency[%]	90	92
Protection class	IP68	IP68
Weight[kg]	5	5





HXPS-300-12 / HXPS-300-24

The underwater power supply HXPS-300 is fully potted power supply. It is a 300W industrial AC/DC power supply featuring the outstanding capability to operate under a harsh environment with high dust density,humidity,vibration and altitude. The entire series is housed with a stainless steel 304 case and fully potted with epoxy resin.It guarantees a safe and long-lasting functioning under water. Even low voltage devices can now be operated with the underwater power supply which leads to enormous reduction of time and material cost at the installation sites.

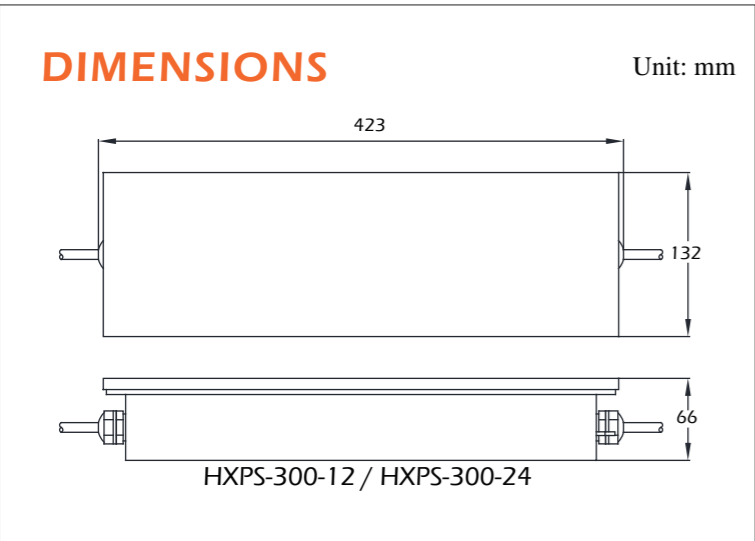


CHARACTERISTICS

- ◆ Constant Voltage & Constant current mode output.
- ◆ Protection Functions: OCP, SCP, OVP, OTP.
- ◆ IP68 design. Rating for underwater intallation.
- ◆ Typical lifetime > 40000 hours.
- ◆ Cable type(Input):1.5m STW 18AWG/3C
- ◆ Cable type(Output):1.5m STW 18AWG/2C

Type		HXPS-300-12	HXPS-300-24
Dimensions (L×W×H) [mm]		423×132×66	423×132×66
Nominal input voltage[V/AC]		100-305	100-305
Nominal input frequency[Hz]		47~63	47~63
Output voltage[V]		12	24
Output current[A]	200VAC~305VAC	22	12.5
	100VAC~180VAC	18.7	10.63
Efficiency[%]		91	94
Protection class		IP68	IP68
Immersion depth max		1 m	1 m
Weight[kg]		5	5

HXPS-240-24


The underwater power supply HXPS-240 is fully potted power supply. It is a 240W industrial AC/DC power supply featuring the outstanding capability to operate under a harsh environment with high dust density,humidity,vibration and altitude. The entire series is housed with a stainless steel 304 case and fully potted with epoxy resin. It guarantees a safe and long-lasting functioning under water. Even low voltage devices can now be operated with the underwater power supply which leads to enormous reduction of time and material cost at the installation sites.

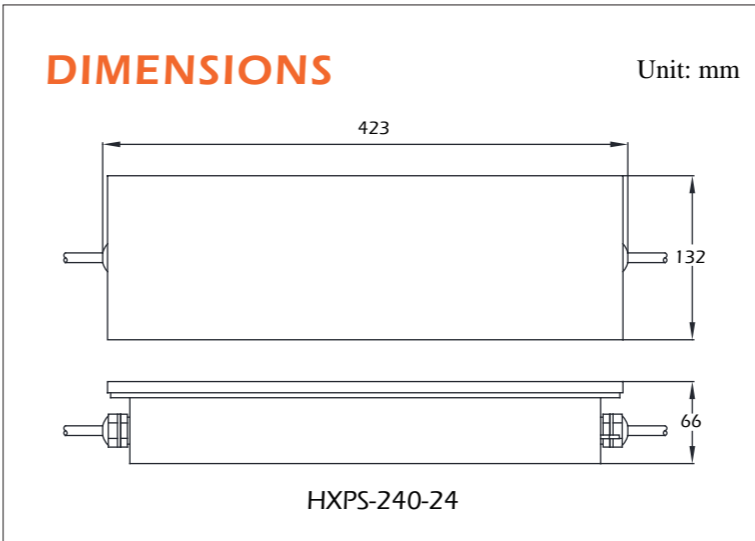

CHARACTERISTICS

- ◆ Constant Voltage & Constant current mode output.
- ◆ No load / Standby power consumption<0.5W
- ◆ IP68 design. Rating for underwater intallation.
- ◆ Typical lifetime > 40000 hours.
- ◆ Cable type(Input):1.5m STW 18AWG/3C
- ◆ Cable type(Output):1.5m STW 18AWG/2C

Type		HXPS-240-24
Dimensions (L×W×H) [mm]		423×132×66
Nominal input voltage [V/AC]		100-305
Nominal input frequency [Hz]		47~63
Output voltage [V]		24
Output current [A]		10
Efficiency [%]		92
Protection class		IP68
Weight [kg]		5



CROWNE PLAZA

