




N-FM-100 Flush Mount Nozzle(Zero Entry)

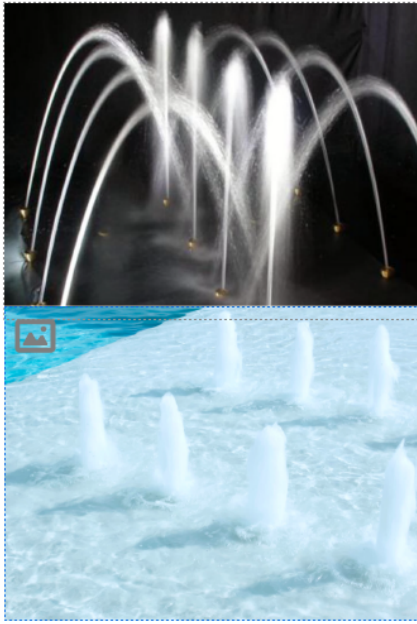

N-FN-100 ELEVATION

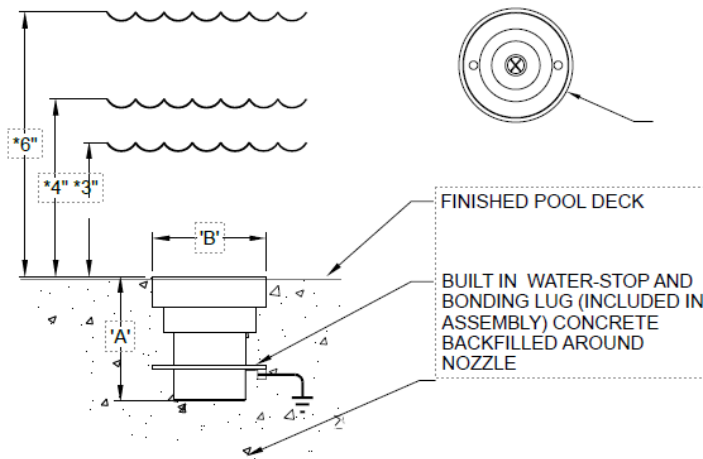

RECESSED TOP FOR EASE OF REMOVAL

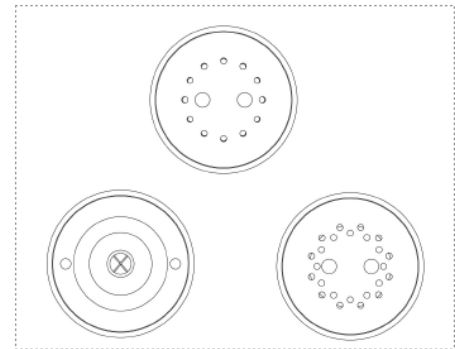

TECHNICAL AND HYDRAULIC DATA									
		DIMENSIONS			SPRAY HEIGHT/PERFORMANCE				
MODEL NO.	(F) N.P.	'A'	'B'	*SUBM. (INCHES)		8"	12"	18"	24"
N-FM-100	1"	2-5/16"	2-5/8"	6"	GPM:	22	25	34	44
					HEAD (ft.):	14'	20'	30'	38'
				4"	GPM:	18	21	29	36
					HEAD (ft.):	8'	12'	19'	26'
				3"	GPM:	16	19	23	29
					HEAD (ft.):	7'	11'	16'	23'

SPECIFICATION DATA: Flush Foam Nozzle has machined brass or stainless steel construction, machined jet orifices, a removable recessed cap for ease of cleaning, with built in waterstop fitting and a 1" (f) N.P.T. threaded connection. When submerged, this water level dependent nozzle creates a vertical mound of water that pushed through shallow water.

NOTES: 1. Available in Brass or Stainless Steel
2. Nozzle Interchangeable in the field